Geochronology, 7, 289–308, 2025 https://doi.org/10.5194/gchron-7-289-2025 © Author(s) 2025. This work is distributed under the Creative Commons Attribution 4.0 License.





Further investigations into the accuracy of infrared radiofluorescence (IR-RF) and its inter-comparison with infrared photoluminescence (IRPL) dating

Mariana Sontag-González¹, Madhav K. Murari², Mayank Jain³, Marine Frouin⁴, and Markus Fuchs¹

Correspondence: Mariana Sontag-González (mariana.sontag-gonzalez@geogr.uni-giessen.de)

Received: 17 December 2024 – Discussion started: 15 January 2025

Revised: 16 May 2025 – Accepted: 21 May 2025 – Published: 6 August 2025

Abstract. Infrared radiofluorescence (IR-RF) is an alternative dating technique for potassium feldspar grains, offering a higher signal stability and based on a simpler underlying mechanism than more common luminescence dating approaches. However, its accuracy when tested on knownage samples has so far shown inconsistent results. In this study, we present a refined accuracy assessment using samples that have previously produced unreliable IR-RF ages. Our approach incorporates two major methodological advancements developed over the past decade: elevated temperature measurements using the IR-RF70 protocol and sensitivity change correction by vertical sliding. To expand the dose range comparison, we included two additional samples: one expected to be in saturation and another of modern age. Additionally, we evaluated the effect of using a narrower bandpass filter to exclude any signal contributions from potentially contaminating shorter wavelength emissions. Our results following the IR-RF₇₀ protocol with sensitivity corrections show an improvement over the original room-temperature results. For four out of the seven tested known-age samples spanning ca. 100-300 Gy (20-130 ka), we obtained results in keeping with the expected doses. Two additional modern samples, however, yielded slight dose underestimations. Introduction of a multiple-aliquot regenerative dose (MAR) protocol improved the accuracy of two out of three samples with large sensitivity changes. Finally, we also compared the

new IR-RF equivalent doses ($D_{\rm e}$) to those obtained with the newer dating method, infrared photoluminescence (IRPL), for the same samples, including previously published values and new measurements. Like IR-RF, IRPL is also expected to be trap-specific. We observe that, with the new improvements, the success rate of IR-RF is comparable to that of IRPL.

1 Introduction

Infrared radiofluorescence (IR-RF) dating of potassium (K)-feldspar is a technique used to determine the time since sediment deposition (e.g. Trautmann et al., 1998, 1999; Erfurt and Krbetschek, 2003b). The method consists of filling available electron traps within the mineral's crystal lattice through continuous ionising irradiation and quantifying the intensity of the resulting IR emission at ~ 880 nm (this emission was previously reported at 865 nm; see Sect. 4.1 in Sontag-González et al., 2022). By comparing IR-RF curves obtained after natural burial with those obtained after a known laboratory dose (e.g. starting at zero dose following complete signal bleaching), the equivalent dose (D_e) accumulated since burial can be determined. Dividing the D_e by the sample's environmental dose rate yields the time since burial. The main advantages of IR-RF dating over the more common in-

¹Department of Geography, Justus Liebig University Giessen, 35390 Giessen, Germany

²Inter University Accelerator Centre, 110067, New Delhi, Delhi, India

³Luminescence Physics and Technologies, Department of Physics, Technical University of Denmark, Risø Campus, Roskilde, Denmark

⁴Department of Geosciences, Stony Brook University, 255 Earth and Space Sciences Building, Stony Brook, NY 11794-2100, USA

frared stimulated luminescence (IRSL) of K-feldspar (Hütt et al., 1988) include a more athermally stable signal (based on IR-RF fading tests by Krbetschek et al. (2000) suggesting signal stability) and the large number of data points used to build the dose response curve (DRC).

Using a single-aliquot regenerative dose (IRSAR; Erfurt and Krbetschek, 2003a) protocol, Buylaert et al. (2012b) determined IR-RF ages for 16 coarse-grained K-feldspar samples and reported poor agreement with the independent age controls, which ranged from modern to $\sim 130 \, \mathrm{ka}$. For three modern samples, the IR-RF De values were shown to be highly sensitive to the bleaching method used between natural and regenerative measurements, with the most accurate results obtained using a solar simulator bleach of at least 4 h. The IR-RF ages of five young samples ($\sim 100-150 \, \mathrm{Gy}$) were overestimated by $\sim 20\%$ -70%, while those of eight older samples (~ 200 –300 Gy) were underestimated by $\sim 20 \%$ – 40 %. Over the past decade, significant methodological improvements in IR-RF dating have been developed, including measurement at 70 °C instead of at room temperature (Frouin et al., 2017) and a combination of horizontal and vertical sliding for $D_{\rm e}$ estimation (Kreutzer et al., 2017; Murari et al., 2018). The latter is intended to correct for reported sensitivity changes occurring between the two IR-RF measurements (e.g. Buylaert et al., 2012b; Varma et al., 2013). When introducing the IR-RF₇₀ protocol, Frouin et al. (2017) presented results for six samples, five of which matched the quartz-based ages (at 2σ). These new developments warrant a re-analysis of the previous findings on the accuracy of IR-RF ages reported by Buylaert et al. (2012b). Additionally, the segment of the natural dose curve used for D_e estimation with a vertical slide analysis needs to be systematically investigated. Previous work using only a horizontal slide has shown that the D_e is sensitive to the length of the natural dose curve used for sliding (Frouin et al., 2017). It is also conventional procedure to reject initial channels to avoid the "initial rise" effect, i.e. an unexpected signal increase at the beginning of natural and regenerative dose curves whose origin is not well understood (e.g. Buylaert et al., 2012b; Huot et al., 2015; Frouin et al., 2017). The initial rise has been shown to be dose-dependent (Frouin et al., 2017) and is avoided by removing up to a few tens of gray (Gy) from the beginning of the natural dose curve. However, the extent of its effect on the $D_{\rm e}$ is still not clear.

In parallel, Prasad et al. (2017) proposed a new dating method for K-feldspar based on IR photoluminescence (IRPL), which is relevant in the context of IR-RF dating. Both methods involve the emission stemming from electrons relaxing from the excited to the ground state of the K-feldspar principal trap. In IR-RF, these electrons originate from the valence band and get trapped during the process, whereas, in IRPL, the electrons are already trapped but are stimulated to the excited state with IR stimulation. Importantly, in IRPL, the electrons do not leave the trap, leading to a steady-state signal (i.e. electrons continu-

ously "bouncing" between the excited and ground states of the principal trap during IR stimulation) and thereby representing a non-destructive measurement technique. Kumar et al. (2018) identified two IRPL emissions resulting from stimulation with an 830 nm laser, which are centred at 880 and 955 nm (IRPL₈₈₀ and IRPL₉₅₅, respectively). They also demonstrated that these two IRPL emissions correspond to the two known IR-RF emissions and suggested that they arise from the same defect (i.e. the principal trap) but with slightly different environments (i.e. neighbouring atoms or functional groups). The SAR IRPL protocol introduced by Kumar et al. (2021) also contains IRSL steps at increasing temperatures to sequentially target more stable traps, following the strategy of a multiple-elevated-temperature (MET) post-IR IRSL (pIRIR) protocol (Li and Li, 2011). Due to the non-destructive nature of IRPL, the inclusion of IRSL steps allows the comparison of several IRSL and IRPL signals for the same aliquots. Of the 11 sediment samples dated with IRPL (Kumar et al., 2021), 9 had also been dated using IR-RF by Buylaert et al. (2012b). They observed good agreement between the IRPL ages and the independent age controls for 8 samples ranging $\sim 100-300\,\mathrm{Gy}$ but obtained overestimated ages for 3 modern or very young samples. If the IRPL and IR-RF signals indeed originate from the same trap reservoir, they would be expected to yield similar $D_{\rm e}$ values, assuming there is no contamination from other emissions and negligible sensitivity changes during the measurement process. Kumar et al. (2021) observed poor agreement between their IRPL ages and IR-RF ages of the same samples reported by Buylaert et al. (2012b), which were obtained using room-temperature IR-RF measurements (IR-RF_{RT}) and without a correction for sensitivity changes. A comparison between IRPL measurements and the new improved IR-RF protocol (Frouin et al., 2017; Murari et al., 2018) is yet to be

In addition, the upper dating limits of both IR-RF and IRPL are still poorly understood. In the case of IR-RF, previous studies suggest the onset of saturation of the natural signal at around 1000 Gy. This value is based on measurements of a Triassic-age sample expected to be in saturation (Murari et al., 2021), measurements of a sequence of knownage samples from the Chinese Loess Plateau (Buchanan et al., 2022), and a study of long-term signal stability using artificially added gamma doses (Kreutzer et al., 2022a). These findings are at odds with the DRCs obtained in the laboratory, which continue to grow over > 3000 Gy. The upper dating limit of IRPL has not been studied using natural samples yet. However, the characteristic saturation dose (85 % saturation) of laboratory-irradiated DRCs ranges between ca. 1400 and 2500 Gy (Kumar et al., 2021) depending on the protocol used (e.g. with or without preheat). Comparison of the IRPL and IR-RF field saturation doses will help determine whether the relatively low upper limit of $\sim 1000\,\mathrm{Gy}$ for IR-RF dating is a characteristic of the principal trap or whether it is caused by issues specific to IR-RF. One potential issue is an

overlap of the targeted IR-RF emission (centred at 880 nm) with a neighbouring red emission, which has been reported to be thermally unstable (Krbetschek et al., 2000). This overlap can be problematic for $D_{\rm e}$ estimation by making the natural dose curve not directly comparable to the regenerative dose curve, as the red signal would have already decayed in the natural sample but would still contribute to the total signal in the regenerated dose curve. Spectroscopic measurements of a field-saturated sample by Sontag-González and Fuchs (2022) reported differences in mean $D_{\rm e}$ of \sim 400 Gy between integration of the ranges 810–850 and 850–890 nm, confirming that the detection window needs careful consideration. Shifting the detection window further into the IR reduces the contribution from the red emission, which we hypothesise would lead to more accurate $D_{\rm e}$ values.

Here, we re-analyse the original IR-RF_{RT} data for the 16 samples with independent age controls dated by Buylaert et al. (2012b) to include a sensitivity change correction (vertical slide) and present new IR-RF $D_{\rm e}$ values obtained using the IR-RF₇₀ protocol for eight of these samples, which are expected to be more accurate. The IR-RF₇₀ dataset was then expanded by including one additional modern sample and one sample expected to be in field saturation (see Table 1 and Fig. S1 in the Supplement). We vary several IR-RF₇₀ measurement parameters to assess their effect on the resulting $D_{\rm e}$ in an effort to determine the combination that leads to the most accurate results. Tested parameters include the use of the vertical slide, the type of bleach between the natural and regenerative dose curve measurements, the number of rejected initial channels, the length of the natural dose curve used for sliding, and the detection window. On the basis of the SAR results, which suggest large sensitivity changes occur during the natural dose measurement for some samples, we also test the suitability of an IR-RF multiple-aliquot regenerative dose (MAR) protocol. Finally, we compare the IR-RF₇₀ results with MET pIRIR-IRPL ages for 10 samples. IRPL data of 7 of these samples have been published by Kumar et al. (2021), and we measured 3 new samples.

2 Samples and methods

2.1 Sample selection and preparation

A total of 18 samples (Table 1) were selected based on their independent age controls; 17 of these were prepared in the luminescence laboratory at Risø DTU following standard procedures. After initial wet-sieving, grain-size fractions of 90–150, 90–180, 150–212, 180–250, or 150–250 μm in diameter were treated with 10 % hydrogen chloride (HCl) and 10 % hydrogen peroxide (H₂O₂) solutions to remove carbonates and organic matter, respectively. K-feldspar grains were then isolated using a heavy liquid solution with a density of 2.58 g cm $^{-3}$ and etched with hydrogen fluoride (HF; 10 %) for 40 min to remove the alpha-irradiated outer layer. A final HCl treatment dissolved any contaminating fluorides. One

additional sample, Gi326, was prepared in the luminescence laboratory in Giessen, using the same chemical treatments, except for HF etching. This sample is from a Triassic sandstone and has been used previously to test the field saturation of IR-RF₇₀ (Murari et al., 2021).

Etching of K-feldspar has been reported to be uneven and sometimes lead to a larger volume removal than anticipated (Porat et al., 2015; Duval et al., 2018). The effect on the resulting $D_{\rm e}$ is poorly studied, but all samples expected to be in the dating range (i.e. not saturated) received the same treatment (HF etching), so any variation in $D_{\rm e}$ accuracy we observe for these samples would not be caused by a difference in sample preparation. Thus, we do not expect etching to affect our conclusions.

Due to a recently reported issue in past batches of the Risø calibration quartz (RCQ) commonly used to estimate the source dose rate (Tribolo et al., 2019), we adjusted the expected $D_{\rm e}$ of most samples. For the samples whose age controls were determined solely by quartz OSL (i.e. sample codes 075403, 075406, 075407, 072255, 055642, 102011, A8, and B12), we applied a correction factor of 1.0825 (Autzen et al., 2022). We note that, in the original publications of samples from Gammelmark (Denmark) and Sula (Russia), the quartz OSL ages were reported to underestimate the expected Eemian age by ca. 7 %-15 % (Murray and Funder, 2003; Murray et al., 2007). We interpret this observation as further support that the correction is necessary. For the eight samples from Gammelmark and Sula used here, we consider their expected ages to be $130 \pm 2 \,\mathrm{ka}$ (Murray and Funder, 2003; Murray et al., 2007), in contrast to the expected age of 128 ± 2 ka reported in Buylaert et al. (2012b), which presumably already accommodated the previous underestimated quartz OSL ages. The source dose rates for the data from Buylaert et al. (2012b) re-analysed here were also corrected by 1.0825.

2.2 Instrumental setup for IR-RF measurements

The original IR-RF_{RT} luminescence measurements from Buylaert et al. (2012b) were obtained using a Risø TL/OSL DA-20 reader (Bøtter-Jensen et al., 2010) with a specific attachment (Lapp et al., 2012), where the signal is transmitted through an optical light guide and filtered with a Chroma D900/100 interference filter before reaching a Hamamatsu H7421-50 photomultiplier tube (PMT). The effective detection window of this filter and PMT combination has a full width at half maximum (FWHM) spanning \sim 850–875 nm. Large aliquots (\sim 8 mm), containing thousands of grains mounted on stainless-steel discs with silicone oil, were measured according to the IR-RF_{RT} protocol outlined in Table 2. Aliquots were bleached between the natural and regenerative dose steps using either built-in UV LEDs (395 nm) or an external SOL2 solar simulator (Hönle AG).

New radiofluorescence measurements were performed at 70 °C (IR-RF₇₀) using a *lexsyg research* device (Freiberg

Table 1. Details on sampling locations and previous dating studies. Uncertainties in the expected ages represent 1 standard error. IR-RF_{RT} refers to the room-temperature measurement protocol. Previous IR-RF_{RT}, IR-RF₇₀, and IRPL ages are given in Buylaert et al. (2012b), Murari et al. (2021), and Kumar et al. (2021), respectively.

Code	Site and location	Sediment type	Grain size (µm)	Expected age (ka)	Expected D_{e} (Gy)	Type of age control	Previous IR-RF or IRPL studies
981007	Gammelmark	Coastal marine	150-250	130 ± 2	281 ± 11	Biostratigraphy and	IR-RF _{RT}
981009	(Denmark)	sand	150-250	130 ± 2	283 ± 11	quartz OSL (Murray and	IR-RF _{RT} , IRPL
981010	_		150-250	130 ± 2	303 ± 13	Funder, 2003; Buylaert	IR-RF _{RT} , IRPL
981013	-		90-150	130 ± 2	278 ± 13	et al., 2012a)	IR-RF _{RT} , IRPL
952503	Sula (Russia)	Coastal marine	150-212	130 ± 2	267 ± 12	Biostratigraphy and	IR-RF _{RT} , IRPL
H22548	-	sand	180–250	130 ± 2	251 ± 10	quartz OSL (Murray et	IR-RF _{RT}
H22550	-		180–250	130 ± 2	237 ± 11	al., 2007; Buylaert et	IR-RF _{RT}
H22553	-		180–250	130 ± 2	212 ± 11	al., 2012a)	IR-RF _{RT} , IRPL
092202	Indre-et-Loire (France)	Colluvium	180–250	45 ± 2	158 ± 11	¹⁴ C (Aubry et al., 2012)	IR-RF _{RT} , IRPL
075403	Sinai peninsula	Reworked dune	180-250	37 ± 4*	123 ± 13*	Quartz OSL (Buylaert	IR-RF _{RT}
075406	(Egypt)	sand	180–250	41 ± 4*	153 ± 16*	et al., 2012a)	IR-RF _{RT}
075407	-		180-250	40 ± 4*	112 ± 12*	-	IR-RF _{RT} , IRPL
072255	Carregueira (Portugal)	Aeolian sand	180–250	22 ± 2*	$105 \pm 11^*$	-	IR-RF _{RT} , IRPL
055642	North Jutland (Denmark)	Beach sand	90–180	ca. 0*	ca. 0*	-	IR-RF _{RT}
102011	Maria Pia Beach (Sardinia)	Beach sand	180–250	ca. 0	ca. 0*	-	IR-RF _{RT}
A8	Dune, Rømø (Denmark)	Aeolian dune sand	180–250	$0.4 \pm 0.1^*$	1 ± 1*	Quartz OSL (Madsen et al., 2007)	IR-RF _{RT}
B12	Wadden Sea (Denmark)	Coastal marine deposits	180–250	ca. 0*	ca. 0*	-	IRPL
Gi326	Bayreuth (Germany)	Triassic sandstone	90–200	~ 250 Ma	-	Lithostratigraphy (Murari et al., 2021)	IR-RF ₇₀

^{*}Correction of 8.25 % to account for new source calibration (Autzen et al., 2022).

Instruments GmbH; Richter et al., 2013) in Giessen (Germany) equipped with an annular beta source (90 Sr / 90 Y) calibrated with a standard quartz sample using small aliquots on stainless-steel cups with silicone oil (RCQ batch 200; equivalent to 0.059 Gy s⁻¹ on 1 January 2023). We assume an uncertainty of 5% for this calibration. Measurements in Sect. 3.2 were all conducted at the University of Oxford (UK) on the same type of device; further details can be found in Sontag-González et al. (2024). The calibrated annular beta source had a dose rate of 0.053 Gy s⁻¹ (1 January 2023). The radiofluorescence was filtered through a Chroma D850/40 interference filter before being detected by a Hamamatsu H7421-50 PMT with an effective detection FWHM spanning \sim 825–860 nm. Additional experi-

ments in Sect. 4.5 tested a different interference filter centred at 880 nm with an FWHM spanning \sim 875–885 nm (Quantum Design 880HC10). Medium-sized aliquots (\sim 3–4 mm), containing hundreds of coarse grains, were mounted on stainless steel cups with silicone oil. For the "single-grain" measurements in Sect. 3.2, an individual grain was manually placed on each sample holder and fixed with silicone oil. The new measurements followed the IR-RF₇₀ protocol outlined in Table 2. Aliquots were bleached using a built-in LED-based solar simulator, according to the relative intensities in Frouin et al. (2015) and using the following power output: 365 nm (9 mW), 462 nm (55 mW), 525 nm (47 mW), 590 nm (32 mW), 625 nm (100 mW), and 850 nm (84 mW). In a sep-

Table 2. IR-RF measurement protocols. "Natural dose" curve (step 2) refers to the RF measurement where an additive dose is administered on top of the natural dose. The length of the "regenerative dose" measurements (step 6) was sometimes shortened for younger samples.

Step	IR-RF _{RT} SAR protocol	IR-RF ₇₀ SAR protocol	IR-RF ₇₀ N	Purpose			
	(Buylaert et al., 2012b)		Natural (same as SAR)	Regenerative	_		
1	-	Preheat at 70 °C for 900 s	Preheat at 70 °C for 900 s	-	Stabilise temperature		
2	RF at room temperature for between \sim 9 and \sim 480 Gy	RF at 70 °C for 30 000 s (~ 1800 Gy)*	RF at 70 °C for 30 000 s (~ 1800 Gy)*	-	Obtain "natural dose" curve		
3	UV bleach for 1500 s or Hönle SOL2 bleaching for 14 400 s	"Solar simulator" bleaching for 24817 s	"Solar simulator" bleaching for 24817s	"Solar simulator" bleaching for 24 817 s	Fully remove signal		
4	Pause for at least 1 h	Pause for 2 h	Pause for 2 h	Pause for 2 h	Reduce phosphorescence		
5	_	Preheat at 70 °C for 900 s	Preheat at 70 °C for 900 s	Preheat at 70 °C for 900 s	Stabilise temperature		
6	RF at room temperature for between \sim 350 and \sim 2940 Gy	RF at 70 °C for between 35 000 and 65 000 s (~2100–3900 Gy)	RF at 70 °C (at least one channel)	RF at 70 °C for 65 000 s (~ 3900 Gy)	Obtain "regenerative dose" curve		

^{*} Only a segment of the natural dose curve was used for final De estimation; see Sect. 4.4.

arate bleaching test, some aliquots were bleached by direct sunlight exposure (see Sect. 4.3).

2.3 IR-RF data analysis

Data analysis of both the previous and the new IR-RF measurements was conducted in an R programming environment v4.0.2 (R Core Team, 2020). De values were obtained for each aliquot by sliding the "natural dose" curves onto the "regenerative dose" curves using either only a horizontal slide or both horizontal and vertical slides utilising the function "analyse_IRSAR.RF" from the "Luminescence" (v0.9.19) package (Kreutzer et al., 2012, 2022b). The IR-RF₇₀ curves from a representative aliquot are shown in Fig. 1, where the extent of vertical and horizontal sliding of the natural dose curve is shown as red bars. Sample De values were calculated using the arithmetic mean of the aliquot $D_{\rm e}$ values, and stated uncertainties are the standard error of the mean with the source calibration uncertainty added in quadrature. In the few cases in which the standard error was below the channel length (10 s, approximately 0.6 Gy), we regarded the channel length as the mean $D_{\rm e}$ uncertainty because that is the limit of our resolution. Example D_e distributions are shown in Fig. S2.

Following conventional procedure, the initial channels of each natural measurement were ignored during the analysis to account for the initial rise. The initial rise phenomenon is apparent in the first few data points of the curves shown in




Figure 1. IR-RF₇₀ measurements of one aliquot of sample 092202 (position 23) before and after vertical and horizontal sliding of the natural dose curve (interference filter centred at 850 nm; FWHM of 40 nm). Note that the initial four channels (\sim 2 Gy) were not considered for the assessment of sliding quality. The $D_{\rm e}$ value determined for this aliquot is indicated on the x axis.

Fig. 1; in this case, removing the first channel of the natural dose curve would be sufficient to make the natural and regenerative dose curves comparable over the dose range of interest. We tested different rejection lengths, ignoring between 0 (no rejection) and \sim 300 Gy of the initial part of the natural dose curve (i.e. removing between 0 and 499 channels). The effect of rejecting initial channels will be detailed in Sect. 4.4.

2.4 IRPL equipment and procedure

We measured the IRPL emissions centred at 880 and 955 nm for three samples using the same equipment as Kumar et al. (2021), including a ⁹⁰Sr / ⁹⁰Y beta source calibrated using small RCQ aliquots on stainless-steel discs (equivalent to $0.19 \,\mathrm{Gy} \,\mathrm{s}^{-1}$ on 1 January 2023). We used the IRPL attachment (Kook et al., 2018) to the Risø TL/OSL reader with two photomultiplier tubes: a Hamamatsu H10330C-25 in combination with a bandpass interference filter centred at 950 (FWHM of 50 nm) for the IRPL955 emission and a Hamamatsu H7421-50 in combination with either a bandpass interference filter centred at 880 nm (FWHM of 10 nm) for the IRPL₈₈₀ or BG39 and BG3 filters for the IRSL emission. IR LEDs (850 nm with a power density of $\sim 250 \,\mathrm{mW \, cm^{-2}}$ at sample position) were used as the stimulation for IRSL. The IRPL stimulation consisted of an external laser light source (830 nm with a power density of $\sim 3 \text{ mW cm}^{-2}$ at sample position) in a pulsed excitation mode (50 µs on-time followed by 50 µs off-time) for 5 s. IRPL was only measured during the off-time, rejecting the first 3 µs to avoid contamination by the excitation source (PMT gate 53–100 µm).

The measurement protocol consists of an MET pIRIR protocol based on Protocol A of Kumar et al. (2021) and using IR stimulation temperatures of 50, 90, 130, and 290 °C (IRSL₅₀, pIRIR₉₀, pIRIR₁₃₀, and pIRIR₂₉₀, respectively) with room-temperature IRPL measurements interspersed between each step (Table S1). The preheat step was set to 320 °C (60 s), and the IR stimulation at 290 °C (100 s) was used to remove residual signal prior to each irradiation step (cleanout). IRPL signals for each emission were calculated as the integral of the 5 s long measurements, subtracting as background the residual IRPL obtained after the 290 °C IR cleanout (step 16 or 17 in Table S1 for IRPL₈₈₀ or IRPL₉₅₅, respectively). Figures S3 and S4 show examples of the IRPL curves used to obtain the signal and background, respectively. Figure S5 displays examples of the resulting DRC. IRSL signals were also determined for comparison, consisting of the integral of the first 2 s with the last 10 s used for background subtraction. Sensitivity change corrections for IRSL and IRPL consisted of dividing the signal obtained from the natural or various doses (L_n or L_x , respectively) by that obtained from a test dose $(T_n \text{ or } T_x)$ for each SAR cycle. The IRPL and IRSL DRCs were fitted with double exponential functions for better comparability with Kumar et al. (2021). Aliquots were only considered for $D_{\rm e}$ estimation if they passed the following criteria: minimum signal brightness (T_n more than three sigma of the background level and a relative standard error of $T_n < 10 \%$), reproducibility (recycling ratio within 10 % of unity), and low signal carry-over (recuperation < 15%).

3 Considerations on the IR-RF DRC

Among other parameters, in Sect. 4, we will investigate the segment of the natural dose curve that should be used for $D_{\rm e}$ estimation with a vertical slide analysis. In theory, if the natural and regenerative dose curves have the same signal components and follow the same decay, we would not expect any difference in $D_{\rm e}$ values from natural dose curves of different length, provided the segment is long enough for a statistically reliable slide. We can test this hypothesis by measuring a long natural dose curve for all aliquots and repeating the $D_{\rm e}$ analysis using segments of different lengths. Two parameters can be changed in this analysis: the start and end channels of the natural dose curve segment to be used for sliding. Naturally, not every combination makes sense, so here we summarise past studies and preliminary analyses to inform on the combinations we should focus on.

3.1 Initial signal rise: removing initial channels

The segment of the natural dose curve visibly affected by the initial signal rise is often avoided for dating. For example, Buylaert et al. (2012b) removed between 1 and 33 Gy from the start of the curve. Frouin et al. (2017) reported a dose dependence of the initial rise, with the peak maximum ranging from ~ 2 to ~ 40 Gy for samples with $D_{\rm e}$ values of 0 to ~ 300 Gy. Similar values were reported by Murari et al. (2021): ~ 3 and ~ 20 Gy for a modern sample and a saturated sample, respectively. Thus, removal of up to the initial ~ 40 Gy appears to be warranted.

3.2 Initial signal rise: insights from single grains

Previous research has suggested differences in IR-RF characteristics at the single-grain level which would be averaged in the multi-grain aliquots used in the present work (Trautmann et al., 2000; Frouin et al., 2017; Mittelstraß and Kreutzer, 2021). For example, our earlier work on sample H22550 (Sontag-González et al., 2024) revealed that only three out of six measured grains produced the expected IR-RF signal (i.e. decreasing with dose, referred to as Type #1). One additional grain exhibited an initial signal rise followed by signal saturation at ~ 100 Gy (termed Type #2). The remaining two grains showed a flat signal shape indistinguishable from that of an empty sample holder. These results suggest potential issues for IR-RF multi-grain measurements. By mathematically adding the IR-RF signal (i.e. a synthetic aliquot) obtained from individual grains of sample H22550 by Sontag-González et al. (2024), we modelled the signal from multi-grain aliquots with different proportions of the two grain types (Fig. 2). If at least one-third of the grains in a multi-grain aliquot yield the expected IR-RF signal, they will dominate the total signal, and, overall, the signal shape will follow the Type #1 grain pattern (Fig. 2, inset). Interestingly, our modelled signal displays an "initial signal rise"

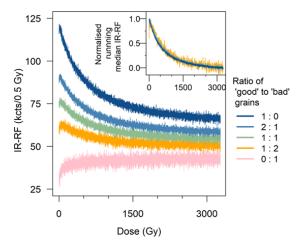


Figure 2. Simulation of regenerative dose IR-RF₇₀ curves of aliquots of sample H22550 composed of a combination of grains with the expected IR-RF signal shape ("good" grains, Type #1) and grains with an initially increasing signal shape ("bad" grains, Type #2). The "good" grain curve (dark blue) is the average of three individual grains with the expected signal shape, whereas the "bad" grain curve was obtained from one grain. The grains are referred to as ID #3, #4, #5, and #6 in Sontag-González et al. (2024). The inset shows the same curves (except for that composed entirely of Type #2 grains) normalised to their maximum signal values, removing as background the median value of the last 100 channels (~60 Gy). Note the decrease in "initial rise" with increasing proportion of "good" grains relative to the total dynamic signal range.

which decreases with a decrease in the proportion of unwanted Type #2 grains. This suggests that (i) the "initial signal rise" originates from signal contamination by presumably non-K-feldspar minerals and that (ii) the DRC of the modelled "contaminated" aliquot converges with that of the "pure" one (for this sample at $\sim 100\,\mathrm{Gy}$). This observation suggests we should investigate removing a larger portion of the initial curve than previously expected.

3.3 Length of natural dose curve segment

Frouin et al. (2017) conducted an iterative test increasing the segment length over the first 100 channels (horizontal slide) and found that, for their samples, a $D_{\rm e}$ plateau was reached after \sim 40 channels (\sim 30 Gy with their 0.7 Gy per channel). In Buylaert et al. (2012b), the natural dose curve length varied between 5 and 475 Gy, depending on the sample. More recent studies are showing a preference for the use of long natural dose curves of \sim 260 Gy (Key et al., 2022) or 500–600 Gy (Murari et al., 2021; Scerri et al., 2021; Kreutzer et al., 2022a; Buchanan et al., 2022, 2024).

For a preliminary analysis, we tested the effect of varying the natural dose curve segment for one sample (981009). Having measured long curves of \sim 1800 Gy, we obtained 2996 mean $D_{\rm e}$ values using incrementally larger segments (Fig. 3), having removed the initial \sim 2 Gy (4 channels) in

all iterations. When using the vertical and horizontal analysis, a large change in $D_{\rm e}$ values was observed (Fig. 3b), but no $D_{\rm e}$ plateau was reached. Short segments (< 15 Gy) led to unrealistically high $D_{\rm e}$ values of thousands of gray possibly due to the uncertainties of the sliding algorithm, so we will focus on larger curve segments. Six representative segment lengths of between ca. 75 and 1800 Gy were chosen to cover the range expected to yield reliable results for dating. We also note that the pattern of $D_{\rm e}$ variation based on sliding segment appears to be a dose-dependent characteristic (see Fig. S6). Thus, the choice of segment should account for the differences in source dose rate of different readers; i.e. the choice should be made based on dose rather than number of channels.

4 IR-RF De estimation

4.1 Effect of vertical slide correction

The original mean $D_{\rm e}$ values obtained by Buylaert et al. (2012b) using an IR-RF_{RT} protocol are reproduced in Fig. 4a (open circles). When using the internal UV LEDs for the bleaching steps between the natural and regenerative dose steps, the $D_{\rm e}$ values are either over- or underestimated (at 2σ) for all 16 samples. By replacing the UV bleaching step with an external bleach in a solar simulator (SOL2) for a subset of six samples, Buylaert et al. (2012b) observed an improvement in results, but the $D_{\rm e}$ values were still under-or overestimated for five of the six samples tested (Fig. 4a, open squares).

Application of the new vertical slide correction for sensitivity changes led to an increase in $D_{\rm e}$ values for all samples except for one of the modern ones (Table 3 and Fig. 4a, filled symbols). This adjustment resulted in eight samples aligning with the expected $D_{\rm e}$ (at 2σ), but it also increased the overestimation for most of the other samples. A similar pattern was observed for the aliquots bleached with UV LEDs and with SOL2. For the UV LED dataset, the sensitivity change correction led to an increase in the scatter of the $D_{\rm e}$ distribution of most samples, evident from the increased standard errors of the mean (Fig. 4a). These results suggest that sensitivity change corrections alone do not improve the accuracy of IR-RF_{RT} results.

4.2 Effect of measurement temperature

Of the 16 samples analysed in Sect. 4.1, we selected 8 for new measurements at 70 °C, keeping only 1–2 samples per site. The new measurements using the IR-RF₇₀ protocol showed a better agreement with the expected values (Fig. 4b). Four of the samples have $D_{\rm e}$ values matching expectations at 1σ . Interestingly, for these four samples, results with and without the sensitivity change correction were indistinguishable from each other at 1σ .

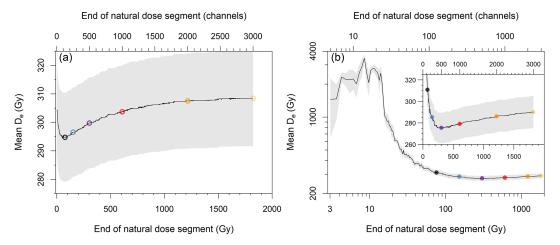


Figure 3. Representative example of the effect of the length of the natural dose curve on the mean D_e for sample 981009 with an IR-RF₇₀ protocol (mean of three aliquots). The segment length was iteratively increased by one channel, and D_e values were estimated using (a) a horizontal slide or (b) a vertical and a horizontal slide. The initial ~ 2 Gy (four channels) was always rejected. Note that the main plot in panel (b) is shown in logarithmic scale. The inset shows a magnification of the region of interest of the main plot. The grey shading represents the standard error of the mean. The coloured points indicate the segment lengths chosen for further analysis.

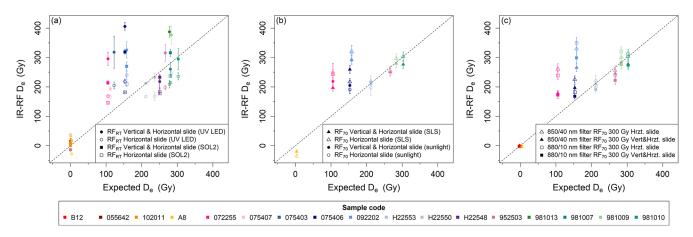


Figure 4. Comparison of published and new IR-RF results with the expected D_e values. (a) IR-RF was measured at room temperature (RT). The measurements from Buylaert et al. (2012b) (open symbols) were analysed without vertical slide. Those measurements were reanalysed here with vertical slide correction of sensitivity changes (filled symbols). Aliquots were bleached with UV LEDs or an external solar simulator (SOL2) between the natural and regenerative dose measurements. (b) IR-RF of a subset of the same samples as in the previous panel measured at 70 °C. D_e values were obtained with (filled symbols) and without (open symbols) vertical slide. The same natural dose segments as in Buylaert et al. (2012b) were used for sliding. Aliquots were bleached with the internal solar simulator made up of an LED array (SLS; nine samples) or direct sunlight (four samples) between the natural and regenerative dose measurements. (c) All IR-RF₇₀ with different detection filters using a segment of the natural dose curve spanning $\sim 300 \, \text{Gy}$ (500 channels) but rejecting the initial $\sim 2 \, \text{Gy}$ (4 channels). Note that a 5 Gy interval was placed between the expected doses of the modern samples to aid visualisation.

For all aliquots, we measured the natural dose curves over a relatively long dose range of $\sim 1800\,\mathrm{Gy}$ when using the IR-RF₇₀ protocol. However, for the results shown in Fig. 4a–b, we used the same dose ranges in the sliding procedure as in the original analysis of Buylaert et al. (2012b) to allow a more direct comparison. We adjusted the total lengths of the natural dose curve segments (5–475 Gy) and removed the initial channels (1–33 Gy) aliquot-wise.

4.3 Effect of bleaching type

Given the large differences in IR-RF $D_{\rm e}$ observed by Buylaert et al. (2012b) when using the internal UV LEDs or an external solar simulator (SOL2) for the signal bleach between the natural and regenerative dose steps, we tested the efficacy of the internal solar simulator for IR-RF₇₀ measurements by comparing it to a solar bleach. We used three samples with poor matches to their expected doses (sample nos. 092202, 075406, and 072255) and one sample that

Table 3. Results from IR-RF measurements at room temperature (RT), either with or without sensitivity change correction. Data have been re-analysed from Buylaert et al. (2012b). Aliquots were bleached with UV LEDs or an external solar simulator (SOL2) between the natural and regenerative dose steps. "n" refers to the number of aliquots used to determine the arithmetic mean D_e . IR-RF D_e uncertainties represent the standard error.

Sample	Expected		IR-RF _{RT} (UV	LED bleach)		IR-RF _{RT} (S	OL2 bleach)
code	De (Gy)	n	Horizontal slide D_e (Gy)	Vertical and horizontal slide $D_{\rm e}$ (Gy)	n	Horizontal slide D _e (Gy)	Vertical and horizontal slide $D_{\rm e}$ (Gy)
981007	281 ± 11	6	214±5	261 ± 23	4	237 ± 3	316 ± 13
981009	283 ± 11	11	248 ± 14	377 ± 31	_	_	_
981010	303 ± 13	4	236 ± 12	295 ± 36	_	_	_
981013	278 ± 13	5	209 ± 13	388 ± 18	_	_	_
952503	267 ± 12	11	198 ± 7	316 ± 29	_	_	_
H22548	251 ± 10	5	185 ± 12	218 ± 24	4	178 ± 1	233 ± 8
H22550	237 ± 11	10	168 ± 15	233 ± 14	_	_	_
H22553	212 ± 11	3	167 ± 4	213 ± 4	_	_	_
092202	158 ± 11	13	240 ± 13	326 ± 28	4	209 ± 8	270 ± 15
075403	123 ± 13	6	205 ± 12	318 ± 54	_	_	_
075406	153 ± 16	9	219 ± 7	406 ± 13	4	182 ± 2	319 ± 7
075407	112 ± 12	3	167 ± 8	194 ± 6	_	_	_
072255	105 ± 11	15	169 ± 4	296 ± 22	4	146 ± 3	214 ± 7
055642	ca. 0	6	-14 ± 2	15 ± 9	_	_	_
102011	ca. 0	8	36 ± 5	11 ± 2	4	11 ± 10	1 ± 2
A8	1 ± 1	6	-28 ± 2	17 ± 16	_	_	-

matched its expected dose (H22553). Three aliquots per sample received an external solar bleach between the natural and regenerative steps by placing them on a windowsill for 1 week in late May in Giessen, Germany. The aliquots were exposed to a cumulative \sim 82 h of daylight, including at least 8 h of direct sunlight. For three of the four samples, $D_{\rm e}$ values obtained with vertical slide correction were statistically indistinguishable (at 1σ) from those obtained using the internal solar simulator (Fig. 4b), suggesting that the type of bleaching may contribute to the inaccuracy of some samples but is not the main cause behind it.

4.4 Sliding range of IR-RF₇₀ natural dose curve

Now, we will investigate how the choice of the natural dose curve segment used for sliding affects the resulting $D_{\rm e}$ value with the IR-RF₇₀ protocol following the considerations laid out in Sect. 3. For the following, we added two new samples to the dataset, which were not analysed by Buylaert et al. (2012b): a modern sample (B12) and a field-saturated sample (Gi326). At least three aliquots were measured per sample.

Firstly, we assessed the dose range that should be removed from the beginning of the natural dose curves to mitigate the initial rise effect. We compared the mean $D_{\rm e}$ values resulting from using the initial $\sim 150\,{\rm Gy}$ of the natural dose curve, while rejecting various initial amounts: 0 (no rejection), 2, 5, 11, 17, 36, or 72 Gy for each of 10 samples (Fig. 5a–b). Note that the rejected channels are still considered for $D_{\rm e}$

calculation to be a laboratory-added dose even though they are excluded from the sliding algorithm to assess goodness of fit. Using only a horizontal slide analysis (Fig. 5a), we observed no significant change in $D_{\rm e}$ except for the modern samples, for which only the iterations without any rejection matched the expected doses. When applying the sensitivity change correction (Fig. 5b), we observed a pattern of gradual decrease in $D_{\rm e}$ values of up to 17% (relative to the no rejection scenario) for all non-modern samples.

We then repeated this test using longer segments of the natural dose curve (~ 300 or $\sim 600\,\mathrm{Gy}$) while rejecting the initial 0–150 or 0–301 Gy for each of the 10 samples (Fig. 5c–d and e–f, respectively). Similar patterns to those with the short segment were observed but with a smaller gradual change in $D_{\rm e}$ with increasing segment length for the non-modern samples (up to $10\,\%$ and $11\,\%$ relative to the no-rejection scenario, respectively). Comparing results from natural dose curve segments of different lengths ($\sim 150,300,$ or $600\,\mathrm{Gy}$) with sensitivity change correction (Fig. 5b, d and 3f, respectively) reveals that the length of the segment has a higher impact on $D_{\rm e}$ than the amount of rejected initial channels. If the natural dose curve is sufficiently long, up to ~ 35 – $100\,\mathrm{Gy}$ can be removed to address the initial rise effect.

However, the question remains as to how long the natural dose curve should be. We tested this by fixing the beginning of the curve (rejecting the initial 2 Gy to avoid the channels most affected by the initial rise) and changing the length of the curve to span \sim 75, 150, 300, 600, 1200, or 1800 Gy, i.e.

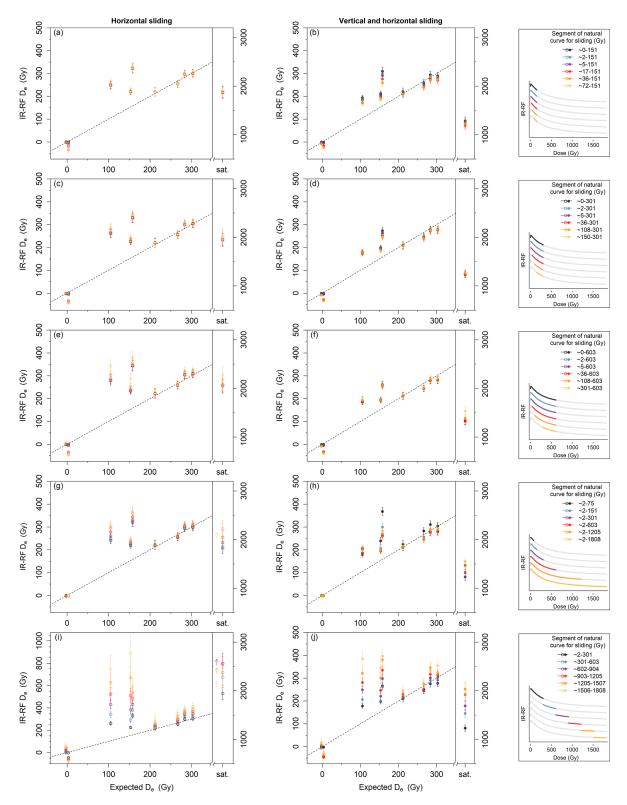


Figure 5. Comparison of IR-RF₇₀ mean D_e values using fixed segments of the natural dose curve and $(\mathbf{a}, \mathbf{c}, \mathbf{e}, \mathbf{g}, \mathbf{i})$ only horizontal sliding or $(\mathbf{b}, \mathbf{d}, \mathbf{f}, \mathbf{h}, \mathbf{j})$ vertical and horizontal sliding. For clarity, the used segments of a representative natural dose curve (sample 092202) are shown in the legend box to the right of the corresponding plots. Note that a 5 Gy interval was placed between the expected doses of the two modern samples to aid visualisation. The D_e for the field-saturated sample Gi326 is shown on the right-hand y axis in each plot; its expected D_e is "saturated" (sat.). The dashed line indicates the 1:1 line. (\mathbf{e}, \mathbf{g}) Arrows indicate a minimum estimate caused by the limit of the regenerative dose curve.

125, 250, 500, 1000, 2000, or 3000 channels, respectively (Fig. 5g-h). For the two modern samples, we observed minimal $D_{\rm e}$ variation. For the other samples and without a sensitivity change correction, we observed a gradual increase in $D_{\rm e}$ with increasing length of the natural dose curve (Fig. 5g). Relative to the shortest segment (\sim 75 Gy), the $D_{\rm e}$ values increase by between 3 % and 27 %, with the larger increases (15 %–27 %) observed for the field-saturated sample and for the three samples with poor matches to the expected doses. Note that, for the field-saturated sample, the longest segment yielded only a minimum dose estimate due to the limit of the regenerative dose curve (i.e. the analysis algorithm restricts sliding the natural dose curve further than the end of the regenerative dose curve). The remaining four samples showed only 3 %–5 % increase. We observed a similar pattern when applying the sensitivity change correction, but the trend of increase in $D_{\rm e}$ generally begins only for segments $> 300 \, {\rm Gy}$, and it is superimposed onto an initial $D_{\rm e}$ decrease (see also

The results shown in Fig. 5g—h suggest sensitivity changes occur during measurement of the natural dose curve that are not corrected by vertical sliding, as this method only addresses changes between the end of the natural dose curves and the beginning of the regenerative dose curves. A comparison of the fit quality between the natural dose curves and the regenerative dose curves for samples with small and large sensitivity changes is shown in Fig. S7.

To further investigate sensitivity changes, we repeated the $D_{\rm e}$ estimations for all samples using segments of the natural dose curves spanning ~ 300 Gy but beginning at either 2, 301, 602, 903, 1205, or 1506 Gy (Fig. 5i-j). We observed a gradual change in De for all samples with both analysis types. Without a sensitivity change correction, D_e values increased by up to 22 %-294 % (relative to the initial segment) for the non-modern samples. The three samples whose $D_{\rm e}$ values consistently overestimate (sample nos. 092202, 075406, and 072255) had much larger increases (78 %-294%) than the four other non-modern samples (22%-36 %). The modern samples had either an increase or a decrease of 60–75 Gy. For the field-saturated sample, the final three segments yielded only a minimum dose estimate due to the limit of the regenerative dose curve. We observed a D_e increase of up to 32 % for the field-saturated sample but expect that this number would be higher if the regenerative dose curve had been longer and thus allowed an absolute value for the final three segments. With the sensitivity change correction, the $D_{\rm e}$ increases were less pronounced: up to 49 %-116 % for the three "problematic" samples and for the field-saturated sample and up to 12 %–28 % for the other non-modern samples.

Overall, the length of the natural dose curve segment used for sliding affects the resulting D_e values for most of the tested samples. For short segments (e.g. ≤ 151 Gy), results using the vertical slide analysis are very sensitive to an initial channel rejection. Excessively long segments might lead

to a dose overestimation possibly due to sensitivity changes occurring during the natural dose curve measurement. A segment of $\sim 300\,\mathrm{Gy}$ seems to be relatively insensitive to the rejection of the initial channels for non-modern samples and avoids the D_e increase observed for longer segments. Mean D_e values for all samples using this segment are given in Table 4 and shown in Fig. 4c (see Fig. S2 for the D_e distributions).

4.5 Detection window

The observed dose-dependent mismatch between the natural and the regenerative dose curves could be due to varying contributions from neighbouring emissions to the total signal. To test whether the observed $D_{\rm e}$ variations are caused by a contribution of the red RF emission (centred at ca. 700-730 nm; Trautmann et al., 1998; Krbetschek et al., 2000), we shifted the detection window further into the IR by replacing the bandpass filter centred at 850 nm (FWHM: 40 nm) with one centred at 880 nm (FWHM: 10 nm) and repeating all measurements (three aliquots per sample) and analyses discussed in Sect. 4.4. We chose a filter with a narrower detection window to avoid emissions in shorter or longer wavelengths than the desired 880 nm RF emission. If the red emission contributed to the total signal, we would expect a higher $D_{\rm e}$ accuracy and lower $D_{\rm e}$ variations with segment choice when using the new filter.

Measurements with the 880 nm filter showed slightly more variability, probably due to the lower signal intensity with the narrower filter (compare Figs. S7 and S8). However, we generally observed similar patterns with both filters. The mean $D_{\rm e}$ values are statistically indistinguishable (at 2σ) for 9 of the 10 samples. An overview of the results for all tested natural dose segments is shown in Fig. S9. The mean IR-RF₇₀ $D_{\rm e}$ values for all samples using the initial $\sim 300\,{\rm Gy}$ segments are given in Table 4 and compared with those using the broader filter in Fig. 4c (the results for sample Gi326 will be discussed in Sect. 7).

5 An IR-RF MAR protocol

As indicated in Sect. 4.4, some samples appear to suffer from significant progressive sensitivity changes during the first laboratory irradiation, thereby making the natural and regenerative dose curves not directly comparable. More importantly, the vertical slide is not an effective technique to correct for such progressive sensitivity changes, as it only corrects for changes in signal intensity but still assumes that the curve shapes are comparable. In luminescence dating, MAR procedures (Aitken, 1998) can be implemented to circumvent sensitivity changes when the typical test dose correction in a SAR protocol is deemed insufficient for either quartz (e.g. Lu et al., 2007; Ankjærgaard, 2019) or K-feldspar applications (e.g. Li et al., 2013). In MAR protocols, the natural and regenerative datasets stem from different aliquots, with the

Table 4. Results from IR-RF measurements at 70 °C using different bandpass filters and IRPL measurements after the preheat step (APh) and after the IRSL₅₀ step (pIR₅₀IRPL). IR-RF D_e values were obtained using either a single- or multiple-aliquot regenerative dose (SAR or MAR, respectively) procedure. SAR IR-RF D_e values were obtained using the initial ~300 Gy (500 channels) of the natural dose curve, rejecting the initial ~2 Gy (4 channels) and applying a sensitivity change correction (horizontal and vertical slide), whereas MAR D_e values were obtained from segments of the natural dose curve spanning ca. 108–1808 Gy (180–3000 channels). "n" refers to the number of aliquots used to determine the arithmetic mean D_e . IR-RF D_e uncertainties represent the standard error.

Sample	Expected	IR-RF ₇₀						IRPL					
code	D_{e} (Gy)	850/40 nm filter			880/10 nm filter		n IRPL ₈₈₀		De (Gy)	IRPL955 $D_{\rm e}$ (Gy)			
		n	SAR De (Gy)	MAR De (Gy)	n	SAR De (Gy)		APh	pIR ₅₀ IRPL	APh	pIR ₅₀ IRPL		
981009	283 ± 11	4	275 ± 14	264 ± 17	3	282 ± 17	3*	265 ± 4	297 ± 9	226 ± 3	279 ± 14		
981010	303 ± 13	3	278 ± 14	232 ± 12	3	273 ± 14	3*	267 ± 7	280 ± 5	246 ± 9	282 ± 16		
952503	267 ± 12	3	245 ± 13	247 ± 14	3	222 ± 14	6*	263 ± 6	288 ± 7	226 ± 8	255 ± 6		
H22553	212 ± 11	3	210 ± 15	214 ± 14	3	191 ± 12	3*	232 ± 10	248 ± 11	205 ± 10	237 ± 10		
092202	158 ± 11	3	266 ± 14	233 ± 17	3	299 ± 20	3*	156 ± 10	159 ± 11	146 ± 3	151 ± 4		
075406	153 ± 16	3	197 ± 10	131 ± 8	3	168 ± 9	4	158 ± 2	176 ± 4	139 ± 3	173 ± 5		
072255	105 ± 11	3	178 ± 10	121 ± 10	3	172 ± 12	3*	105 ± 7	103 ± 6	94 ± 2	105 ± 4		
A8	1 ± 1	3	-2 ± 1	-26 ± 7	3	-2 ± 1	7	36 ± 3	41 ± 3	24 ± 2	39 ± 3		
B12	ca. 0	3	-2 ± 1	-13 ± 8	3	-2 ± 1	3*	68 ± 6	70 ± 4	39 ± 1	66 ± 5		
Gi326	\sim 500 000	6	1234 ± 64	1263 ± 65	5	1260 ± 81	3	1206 ± 141	1217 ± 143	1116 ± 120	1191 ± 138		

^{*} IRPL results taken from Kumar et al. (2021).

latter being bleached to remove the natural signal prior to a laboratory irradiation.

We tested the suitability of an IR-RF MAR protocol to overcome the sensitivity changes induced by the first laboratory irradiation of an aliquot. The protocol consisted of obtaining the natural dose curves for several aliquots following the same steps as in a SAR protocol (for simplification, the same dataset was used as in Sect. 4.4), whereas the regenerative dose curves (one per sample) were obtained from new aliquots in which the natural dose curve step and associated preheat were skipped (MAR protocol in Table 2). To account for inter-aliquot differences in mass and signal intensity, each SAR natural dose curve was scaled by the ratio between the first data point of the MAR and SAR curves, as exemplified in Fig. S10. An instrumental background was subtracted from each curve prior to normalisation, using the mean signal intensity of a 1000 s long measurement of an empty sample holder (12 961 cts per channel).

We repeated the MAR $D_{\rm e}$ analysis using varying natural dose curve segments, as previously described for the SAR protocol in Sect. 4.4. As shown in Fig. S11, the use of different segments led to different $D_{\rm e}$ values for all 10 investigated samples, though some differences in pattern are of note. Unlike the SAR analysis, in which use of an increasingly long natural dose curve segment led to higher $D_{\rm e}$ values for all samples (Fig. 5h), with the MAR analysis, increasingly long segments (i.e. 2–151 to 2–1808 Gy) led to a better agreement with expected $D_{\rm e}$ values for five non-modern samples and very small changes for the remaining four samples of known age (Fig. S11d). For this reason, we also con-

sidered how many channels should be removed from the beginning of the 1808 Gy long natural dose curve (Fig. S11c). We found that rejecting the initial 108 Gy was the best compromise to achieve a good agreement with expected $D_{\rm e}$ values across the non-modern samples (Fig. 6a and Table 4). The MAR protocol using a natural dose curve segment of 108–1808 Gy (180–3000 channels) with vertical and horizontal slide yielded $D_{\rm e}$ in agreement with the expected values (at 2σ) for five out of the seven non-modern samples of known age, including for two of the three samples identified as "problematic" in Sect. 4.4.

6 Comparison of IR-RF and IRPL

A subset of the samples used in Sect. 4 to evaluate different IR-RF protocols have also been used to assess the accuracy of IRPL (Kumar et al., 2021), allowing us to directly compare both methods. To create a more comprehensive dataset, we measured three additional samples (075406, A8, and Gi326) following an IRPL protocol and using the same equipment as Kumar et al. (2021). For each sample, between three and seven aliquots were measured.

Since the IRPL signal measurement is mostly non-destructive, it can be taken at several steps in the protocol, yielding several IRPL $D_{\rm e}$ values for each emission (i.e. both before and after the preheat and after each IRSL step). Note that the IRPL steps after the IRSL₂₉₀ step are merely used to determine a background signal (see Fig. S4) and do not yield a $D_{\rm e}$ value. In this study, we measured the 880 nm and the 955 nm IRPL emissions. The sequential IRSL steps can also

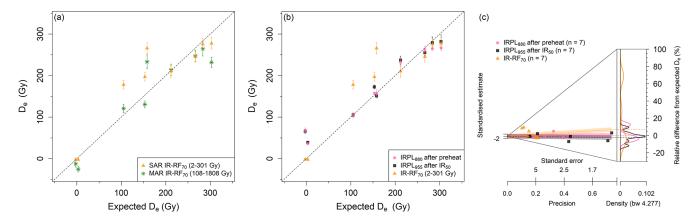


Figure 6. Comparison of the new IR-RF $_{70}$ and IRPL results with the expected $D_{\rm e}$ values. (a) Single-aliquot regenerative dose (SAR) IR-RF $_{70}$ results and those obtained using a multiple aliquot regenerative dose (MAR) protocol. Results are shown for the most reliable natural dose curve segment of each protocol, as given in the legend. (b) IRPL and SAR IR-RF $_{70}$ are measured on the same set of samples. The IRPL $D_{\rm e}$ measurements are a combination of new measurements and those from Kumar et al. (2021). The subscript after "IRPL" in the legend indicates the wavelength of the targeted emission. IR-RF $_{70}$ $D_{\rm e}$ values were obtained with vertical and horizontal slide. Note that a 5 Gy interval was placed between the expected doses of the modern samples to aid visualisation. (c) Abanico plot of the distributions of the relative differences from the expected $D_{\rm e}$ values (using only the non-modern samples).

each be used to obtain a D_e value, thus resulting in a total of 14 D_e values for each aliquot (see Table S1).

The mean D_e value for each IRPL signal of the fieldsaturated sample Gi326 is shown in Fig. 7a. With the exception of the IRSL₅₀ D_e, which is expected to be significantly affected by fading, all other De values are similar, ranging from ~ 1100 to ~ 1400 Gy. After the IRSL₅₀ step, we observed a convergence of the different IRPL signals to $\sim 1200\,\mathrm{Gy}$. This value is slightly lower than the pIRIR₂₉₀ mean $D_{\rm e}$ value at 1293 \pm 14 Gy (Fig. 7a) and the IR-RF mean sensitivity change-corrected $D_{\rm e}$ values, which are also at ~ 1300 Gy (Fig. 7b–d). We do not notice a significant change between the pIR₅₀IRPL and the following IRPL mean D_e values, suggesting there is no sequential removal of unstable IRPL signal after increasingly hot IRSL steps beyond 50 °C for this sample. A similar behaviour is observed for the three pIRIR mean D_e values, though the large uncertainties in the pIRIR₉₀ and pIRIR₁₃₀ mean D_e values might obscure the expected step-wise increase in signal stability with increasing IRSL temperature (e.g. Li et al., 2013).

Kumar et al. (2021) stated that the IRPL₈₈₀ after the preheat step (APh-IRPL₈₈₀) and the pIR₅₀IRPL₉₅₅ signals are the most promising ones for sediment dating, based on a better agreement with the expected doses. Mean D_e values for these two signals, including two new samples, are shown in Fig. 6b together with the most promising IR-RF signal. The values for other IRPL signals are shown in Fig. S12 (new samples) and Fig. S13 (all samples). The mean D_e values from the pIR₅₀IRPL₉₅₅ signal in Fig. 6b are in good agreement (at 2σ) with the expected doses for all non-modern samples and for six out of seven samples using the APh-IRPL₈₈₀ signal, including two samples strongly overestimated with IR-RF₇₀. However, IR-RF₇₀ is in much better

agreement than any of the IRPL signals for the two modern samples. See Fig. S14 for a direct comparison of the IR-RF and IRPL $D_{\rm e}$ values.

7 DRC shape and signal saturation

The results presented in Sect. 4 showed variability in the IR-RF₇₀ signal across samples regarding their potential to yield the expected dose and the purported sensitivity changes occurring during the natural dose curve measurement. To assess the variability in the IR-RF curve shapes, we plotted all curves obtained with the 850 nm bandpass filter (FWHM: 40 nm) in Fig. 8. In the natural dose curves (Fig. 8a), the modern and field-saturated samples are distinguishable by their steeper and flatter shapes, respectively (highlighted in pink and grey, respectively). The regenerative dose curves (Fig. 8b) show sample-dependent variability in signal brightness and in the "background" level after $\sim 4000\,\mathrm{Gy}$. However, after subtracting the signal value at 1800 Gy as background and normalising the natural dose curves to the signal value at 3 Gy (to discount patterns caused by the initial signal rise), the natural DRC shapes of all samples are relatively similar (Fig. 8a, inset), with small differences observed for the field-saturated and modern samples and for samples 092202 and 075406. In contrast, an equivalent analysis of the regenerative dose curves yielded larger differences in DRC shape (Fig. 8b, inset). All samples follow a similar pattern, except for samples 092202 and 075406 (highlighted in blue and orange in Fig. 8), which saturate later and earlier than the other eight samples, respectively. These two samples were also identified as problematic in Sect. 4.4 when using different segments of the natural dose curve for sliding. An early-saturating DRC could potentially explain gradually

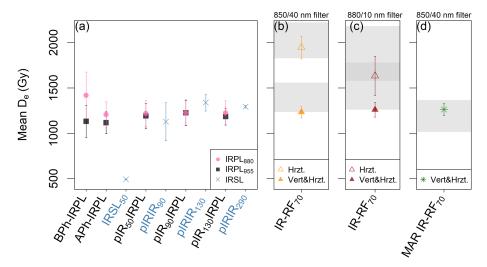


Figure 7. Comparison at field saturation for sample Gi326. (a) Mean D_e values obtained from the various steps in the IRPL sequence, including the IRSL steps (highlighted in blue in the x-axis labels). "BPh" and "APh" refer to before and after the preheat step, respectively. The IR-RF mean D_e values were obtained using (b, d) an 850/40 nm and (c) an 880/10 nm bandpass filter. (b, c) The initial $\sim 300 \, \text{Gy}$ segment of the natural dose curve (rejecting the first $\sim 2 \, \text{Gy}$) was used with horizontal or with vertical and horizontal sliding (Hrzt. and Vert&Hrzt., respectively). (d) Results obtained using a multiple-aliquot regenerative dose (MAR) protocol and sliding the natural dose curve segment spanning 108–1808 Gy. The range of D_e values that could be obtained using alternative natural dose curve segments (i.e. those in (b) Fig. 5g-h, (c) Fig. S9g-h, and (d) Fig. S11b-d) are shown as grey bands without the associated uncertainties.

more inaccurate $D_{\rm e}$ values (as observed in Fig. 5i–j) due to the higher uncertainties when using a flatter curve for sliding (i.e. near-saturation). However, the same behaviour of gradually higher overestimation was observed for sample 092202, with a late-saturating curve, and for sample 072255, whose curve shape follows the consensus. Thus, variability in saturation behaviour does not seem to be the root cause of the observed $D_{\rm e}$ inaccuracy. The DRC shapes of the MAR (in Fig. 8c) follow the same overall pattern across samples as the regenerative dose SAR curves.

We also compared the IR-RF₇₀, IR-IRPL, and pIRIR DRC shapes up to $\sim 4000\,\mathrm{Gy}$ for representative aliquots of the field-saturated sample Gi326 (Fig. 9). Note that only the pIR₅₀IRPL₉₅₅ signal is shown in Fig. 9, but all IRPL signals measured after the preheat step have very similar DRC shapes (see Fig. S5). Likewise, the IR-RF₇₀ DRCs of sample Gi326 measured with an 880 nm (FWHM: 10 nm) or 850 nm (40 nm) bandpass filter are very similar in shape (compare Figs. S7 and S8). By plotting the regenerative IR-RF curves onto an inverted axis, we could directly compare their shapes to those of the other signals, despite their decrease with increasing dose. To assess only the dynamic range of the IR-RF curve, we accounted for the high background signal typical of IR-RF by subtracting the median signal of the last 100 channels ($\sim 60\,\mathrm{Gy}$) from all data points. The curves were then normalised to their maximum signal values. The DRC behaviour is quite similar for all three signals using SAR protocols. None of the three signals seem to provide a significant advantage in terms of onset of signal saturation and thereby an extension of the datable age range. The mean $D_{\rm e}$ values obtained with IR-RF, IRPL, and pIRIR in Sects. 4, 5, and 6 (summarised in Fig. 7) suggest an upper limit of $1000-1300\,\mathrm{Gy}$ for these signals. By vertically projecting the mean D_{e} of each signal onto the corresponding curve, we can qualitatively assess the percentage of signal saturation. Assuming the signals do not continue to grow past $4000\,\mathrm{Gy}$, field saturation was achieved at $\sim 80\,\%-85\,\%$ saturation in all three SAR-based curves; the MAR IR-RF field saturation was slightly higher at $87\,\%-89\,\%$. If the curves had been continued until full signal saturation, the percentages would be slightly lower. These results suggest a similar small long-term signal instability for the three emissions in this sample.

8 Discussion

In the present work, we re-analysed the IR-RF_{RT} data of 16 samples previously examined by Buylaert et al. (2012b) using an updated data analysis method for $D_{\rm e}$ estimation known as vertical slide correction. This technique accounts for sensitivity changes occurring between the natural and regenerative dose curve measurements. Application of this correction method improved the accuracy for half of the samples but led to overestimations for most of the other half (see Fig. 4a and Table 3).

We also re-measured eight of these samples with a newer and modified measurement protocol and included two additional samples of known age to expand the dataset for a following comparison with IRPL. Our new measurements differed from the original ones in three main aspects: the measurement temperature, the length of the natural dose curve

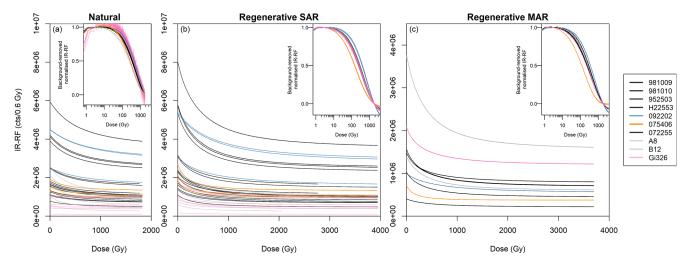


Figure 8. IR-RF DRC shape comparison of (a) the natural dose signal, (b) the regenerative dose signal using a SAR, and (c) the regenerative dose signal using a MAR protocol, all measured with an 850 nm bandpass filter (FWHM: 40 nm). In the insets, a background was subtracted from the IR-RF curves, corresponding to the signal value at a dose of 1800 Gy before normalisation to the signal value at 3 Gy. Curves from the two modern samples and the field-saturated sample are shown in pink and grey, respectively. The DRCs of two additional samples are coloured to highlight their deviation from the curve shape of all other samples.

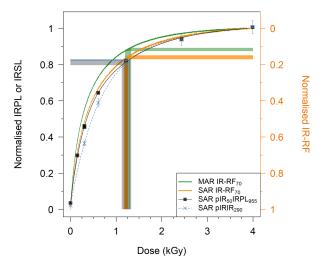


Figure 9. DRC shape comparison of representative aliquots of Gi326. The pIR₅₀IRPL₉₅₅ and pIR₉₀IR₂₉₀ curves are double exponential functions fitted to the sensitivity-corrected signals (L_x/T_x) of 7–8 regenerative doses each, including a repeated dose point (\sim 300 Gy). All curves were normalised to their maximum values. Before normalisation, a background was subtracted from the IR-RF curves, corresponding to the median value of the last 100 channels (\sim 60 Gy). The IR-RF curves decrease with dose, so they were plotted on an inverted axis (right-hand side) to allow a direct comparison. The shaded regions indicate the 1σ range around the four mean D_e values and their projection onto the corresponding DRC.

measurement, and the detection window. Measuring RF at an elevated temperature to keep the shallow traps empty following the IR-RF₇₀ protocol (Frouin et al., 2017) had a large impact on $D_{\rm e}$ and hence on improving the accuracy of the re-

sulting ages (see Fig. 4b). The temperature of 70 °C was suggested by Huot et al. (2015), corresponding to the temperature at which shallow traps are empty and also to the temperature spontaneously reached by the thermocouple during the bleaching step in their *lexsyg* research device. This temperature was then implemented and tested in Frouin et al. (2017) based on a series of IR-RF measurements of nine samples. As new devices have been developed, and given the temperature sensitivity of K-feldspar signals, users should conduct systematic IR-RF tests (e.g. dose recovery) to assess the protocol parameters for their samples.

Determining the optimal length of the natural dose curve used for sliding is challenging. In Buylaert et al. (2012b), the natural dose curve length varied between 5 and 475 Gy, depending on the sample. Contrary to our expectations, we observed continuing changes in mean De values when varying the natural dose curve length from ~ 75 to $\sim 1800\,\mathrm{Gy}$ (Fig. 5g and h). It is important that the segment not be too short to ensure a good comparison between the natural and regenerative dose curves, especially when using the vertical slide. Here, we determined that a length of $\sim 300 \, \mathrm{Gy}$ for the natural dose curve yielded the most promising mean $D_{\rm e}$ values in a SAR protocol, representing the intersection between two behaviours, a D_e decrease possibly caused by the segment being too short for a reliable slide and a De increase possibly related to sensitivity changes, as summarised in Fig. 10a. However, we stress that we do not consider this to be the definitive segment length until the mechanism behind the changes in D_e is explained. As for the vertical slide sensitivity change correction, its application led only to a small difference in the mean D_e of the four samples that agreed with the expected doses (at 2σ) and the two modern sam-

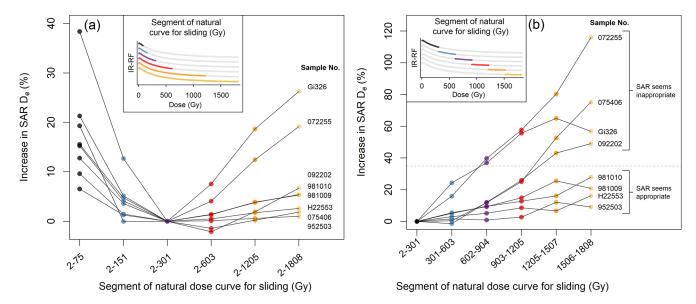


Figure 10. Test of progressive sensitivity changes during the IR-RF₇₀ natural dose curve measurement. D_e values of non-modern samples were obtained using fixed segments of the natural dose curve according to the x-axis labels with vertical and horizontal sliding (same data and colours as in (a) Fig. 5h and (b) Fig. 5j). The increase in D_e is relative to that obtained from the segment 2–301 Gy. (b) The dashed line (35 % increase) separates samples that produce D_e values within 2σ of the expected dose and those that do not.

ples. In contrast, for three samples, the vertical slide led to a significant change in D_e , but neither analysis version agreed with the expected doses (Fig. 4c). Nevertheless, we recommend always using the vertical slide correction, given that sensitivity changes are known to occur and can vary in extent for different samples (e.g. compare Fig. 5g and h).

We also recommend removing initial channels to avoid the initial rise in IR-RF signal seen in most measurements. The effect of initial channel removal is dependent on the length of the natural dose curve (compare Fig. 5b, d, and f) and sample-specific characteristics. We observed no general improvement in accuracy when removing a large initial segment, e.g. $\sim 100\,\mathrm{Gy}$, as suggested by the modelling in Sect. 3.2, so we recommend removing only the segments visually affected by the initial rise. Here, that corresponded to the initial $\sim 2 \, \text{Gy}$ (4 channels). Using the SAR protocol on the two modern samples, such a rejection led to slight dose underestimations (resulting in chronologically impossible negative ages), whereas no rejection yielded mean $D_{\rm e}$ values of 0.0 ± 0.6 Gy for both samples, matching the expectation (at 2σ). Similar results were found for the MAR analysis. We expect that the sharp signal peak caused by the initial rise phenomenon biases the fitting algorithm towards 0 Gy, as the peaks of the natural and regenerative dose curves align. Therefore, we suggest that the better agreement without any rejection is merely coincidental in the case of the modern samples, since the initial rise is always at the beginning of the curves, and maintain that some initial channels should be rejected. Further work would be needed on lowdose samples to explain the observed underestimation and assess the best number of rejected initial channels. However, at this stage, we caution against the reliability of IR-RF $D_{\rm e}$ values below ~ 100 Gy, due to the possible interference from other RF emissions (see Sect. 3.2).

Returning to the non-modern samples, the only common feature among the three samples with SAR D_e values that did not match expected doses was a large increase in $D_{\rm e}$ (49 %–116 %, with a vertical slide) when using progressively higher-dose segments of the natural dose curve for sliding (Fig. 5j). The $D_{\rm e}$ increase in the four other non-modern samples was much lower (12 %–28 %), indicating lower sensitivity changes. We therefore tentatively propose using this characteristic as a screening tool to select samples that can be reliably dated by a SAR IR-RF protocol. Based on the current samples ranging $\sim 100-300 \,\mathrm{Gy}$, a threshold of 35 % in $D_{\rm e}$ increase in the final dose segment ($\sim 1500-1800\,\mathrm{Gy}$) relative to the initial dose segment ($\sim 2-300 \,\mathrm{Gy}$) would separate the two groups (Fig. 10b). Use of a MAR protocol succeeded in obtaining $D_{\rm e}$ values compatible with the expected doses for two of the three samples with large progressive sensitivity changes (see Fig. 6a). A summary of the MAR $D_{\rm e}$ change with segment length is shown in Fig. S15.

We also compared two IR-RF $_{70}$ detection windows (\sim 825–860 and \sim 875–885 nm). In theory, a detection window further into the IR would be advisable by being less prone to contamination from a red emission. However, for the present samples, no significant accuracy improvement was observed (see Fig. 4c), suggesting that the sensitivity changes occurring during the natural dose curve measurement are not caused by an overlay of an unstable emission. However, the existence of other emissions (or non-radiative recombinations) could be responsible for additional sensitiv-

ity changes by altering the proportion of electrons available for the IR-RF process, i.e. through competition effects. Such effects would be present at any detection window of the IR-RF signal. Our findings directly support the comparability of the new IR-RF results with those that would have been obtained with a Risø system, whose standard IR-RF filter has an effective detection window spanning 850–875 nm. A previous IR-RF $_{70}$ laboratory comparison that included both systems also supports their comparability, having yielded $D_{\rm e}$ values matching at 1σ (Murari et al., 2021).

Our comparison of IR-RF70 and IRPL results indicated some interesting differences and similarities between the methods. Whatever causes the overestimation of $\sim 25-70 \,\mathrm{Gy}$ in the IRPL signals for the two modern samples does not seem to affect the IR-RF₇₀ signal, despite our understanding that the same trap populations are being accessed. Inversely, the large overestimation of three samples with IR-RF₇₀ in the expected dose range 100-160 Gy was not observed for any of the IRPL signals, which yielded D_e values not only closer to the expected doses but, depending on the IRPL signal (see Fig. S13), even matching the expectations (at 1σ). Nevertheless, we also highlight that only one IRPL protocol was tested (i.e. a high-temperature SAR MET pIRIR-IRPL) and that other existing IRPL protocols, e.g. a low-temperature SAR MET pIRIR-IRPL (Kumar et al., 2021) or a pIR-IRPL (Duller et al., 2020), might lead to better or worse agreement with our IR-RF results.

Lastly, the DRC shape and signal saturation of the SAR IR-RF₇₀, IRPL, and pIRIR signals of sample Gi326 were very similar (see Fig. 9), with field saturation occurring below 85 % and below 90 % of the full saturation for the SAR and MAR protocols, respectively. This result aligns with the field saturation of 84 % reported by Buylaert et al. (2012b) for the IR-RF_{RT} signal of a different sample. Failure to reach saturation even with a pIRIR₂₉₀ signal is in agreement with the findings of Yi et al. (2016) when using a high test dose $(\sim 500\,\mathrm{Gy})$ in their study and also here for the IRPL and pIRIR of sample Gi326). Although we report very similar IR-RF₇₀ DRC shapes for all but two samples (Fig. 8b, inset), we note that the aliquots used to obtain these curves are composed of hundreds of grains and that previous singlegrain investigations have pointed to a larger DRC shape variation, including for a sample also used in the present work (Sontag-González et al., 2024). The possibility of individual grains with an earlier- or later-saturating IR-RF₇₀ DRC could explain the variability observed here for the multi-grain aliquots of some samples.

In comparison with the DRC of the SAR, the MAR IR-RF₇₀ DRC saturated slightly earlier: 85 % of the signal intensity (relative to the signal at a dose of $\sim 4000\,\mathrm{Gy}$) was reached after a dose of $\sim 1050\,\mathrm{Gy}$, in contrast to $\sim 1300\,\mathrm{Gy}$ in the DRC of the SAR. An earlier onset of saturation of the natural IR-RF₇₀ signal is also supported by a natural IR-RF₇₀ DRC built by Buchanan et al. (2022) using coarse-grain K-feldspar samples of known age from the Chinese Loess

Plateau. Their natural DRC is not incompatible with the DRC of our MAR (Fig. S15a), though the high scatter in their data does not allow a definitive comparison (cf. Fig. S15b). Interestingly, and contrary to our findings, in K-feldspar MET pIRIR studies, MAR approaches have performed better for old samples due to a later onset of saturation relative to SAR and allowed $D_{\rm e}$ values of up to ca. 1100–1200 Gy (e.g. Zhang et al., 2022; Liu et al., 2025) to be determined.

9 Conclusions

We tested whether the methodological developments of the past decade have improved the accuracy of IR-RF dating of known age samples which had previously yielded inaccurate IR-RF ages with an IRSAR protocol. Specifically, we re-analysed previous data and re-measured samples using improved measurement and data analysis protocols (i.e. increased measurement temperature and vertical sliding) and new methods (i.e. MAR IR-RF and IRPL). The IR-RF age underestimation for samples in the 200-300 Gy range reported by Buylaert et al. (2012b) was likely due to the measurement temperature (room temperature) and can be overcome by raising the temperature to 70 °C (i.e. IR-RF₇₀ SAR protocol). Based on our study, we recommend the following: (i) applying the vertical slide correction to account for sensitivity changes, (ii) using a natural dose curve segment length of several hundred gray (e.g. 300 Gy) for sliding, and (iii) rejecting initial channels to mitigate the effects of the initial signal rise. Using these parameters, we observed an agreement with expected ages for four out of seven non-modern samples. However, two modern samples yielded slightly underestimated doses (ca. $-2 \,\mathrm{Gy}$). Furthermore, we propose implementing a sensitivity change test to identify samples unsuitable for IR-RF dating through the comparison of D_e values obtained by using progressively higher-dose segments of the natural dose curve for sliding (see Fig. 10b). Although this procedure increases the measurement time, it might be a worthwhile addition until we better understand what causes the sensitivity changes during the first irradiation of some samples.

Our preliminary investigations using a MAR method suggest it holds promise, especially for samples with large sensitivity changes. However, since only six out of the nine samples of known age produced the expected $D_{\rm e}$ values, we cannot yet recommend its routine application. In our approach, application of the MAR method only required the measurement of one additional aliquot per sample after the traditional SAR measurements.

For samples ranging from $\sim 100-300\,\mathrm{Gy}$, the mean D_e values derived from the pIR₅₀IRPL₉₅₅ and the APh-IRPL₈₈₀ signals are in good agreement (at 2σ) with the expected doses, including two samples strongly overestimated with IR-RF₇₀. However, IR-RF₇₀ demonstrated better agreement than any of the IRPL signals for the two modern samples.

Finally, our study points to a similar upper limit of 1000–1300 Gy for both IR-RF and IRPL, despite the regenerative DRCs of both signals not reaching complete saturation. This finding supports the notion that both techniques target the same traps and indicates that there is some instability of the stored charges.

Data availability. The data analysed in this work are available at https://doi.org/10.5281/zenodo.14507179 (Sontag-González et al., 2025).

Supplement. The supplement related to this article is available online at https://doi.org/10.5194/gchron-7-289-2025-supplement.

Author contributions. MSG, MKM, MFr, and MFu designed the experiments and organised the inter-laboratory comparison. MSG and MFr carried out IR-RF measurements. MSG and MJ carried out IRPL measurements. MSG analysed the results and prepared the article with contributions from all authors. MFu obtained funding.

Competing interests. The contact author has declared that none of the authors has any competing interests.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors.

Acknowledgements. The authors thank Jan-Pieter Buylaert for access to data and samples used in a previous study (Buylaert et al., 2012b) and Bo Li for fruitful discussions. Mette Adrian and Vicki Hansen are thanked for sample preparation. Myungho Kook is thanked for technical support during the IRPL measurements.

Financial support. This study was supported by the German Research Foundation (Mariana Sontag-González and Markus Fuchs: DFG FU417/36-1; Madhav K. Murari and Markus Fuchs: DFG FU417/19-1). Mayank Jain acknowledges the European Research Council Advanced Grant – LUMIN (ERCADG-101097215) for supporting his contribution to this work.

Review statement. This paper was edited by Sumiko Tsukamoto and reviewed by two anonymous referees.

References

- Aitken, M. J.: An introduction to optical dating, Oxford University Press, ISBN 0198540922, 1998.
- Ankjærgaard, C.: Exploring multiple-aliquot methods for quartz violet stimulated luminescence dating, Quat. Geochronol., 51, 99–109, https://doi.org/10.1016/j.quageo.2019.02.001, 2019.
- Aubry, T., Dimuccio, L. A., Almeida, M., Buylaert, Fontana, L., Higham, T., Liard, M., Murray, A. S., Neves, M. J., Peyrouse, J.-B., and Walter, B.: Stratigraphic and technological evidence from the Middle Palaeolithic-Châtelperronian-Aurignacian record at the Bordes-Fitte rockshelter (Roches d'Abilly site, Central France), J. Hum. Evol., 62, 116–137, https://doi.org/10.1016/j.jhevol.2011.10.009, 2012.
- Autzen, M., Andersen, C. E., Bailey, M., and Murray, A. S.: Calibration quartz: An update on dose calculations for luminescence dating, Radiat. Meas., 157, 106828, https://doi.org/10.1016/j.radmeas.2022.106828, 2022.
- Bøtter-Jensen, L., Thomsen, K. J., and Jain, M.: Review of optically stimulated luminescence (OSL) instrumental developments for retrospective dosimetry, Radiat. Meas., 45, 253–257, https://doi.org/10.1016/j.radmeas.2009.11.030, 2010.
- Buchanan, G. R., Tsukamoto, S., Zhang, J., and Long, H.: Testing the natural limits of infrared radiofluorescence dating of the Luochuan loess-palaeosol sequence, Chinese Loess Plateau, Radiat. Meas., 155, 106797, https://doi.org/10.1016/j.radmeas.2022.106797, 2022.
- Buchanan, G. R., Tsukamoto, S., Zhang, J., and Long, H.: Testing infrared radiofluorescence dating on polymineral fine-grains from the Luochuan loess-palaeosol sequence, Chinese loess plateau, Quat. Geochronol., 79, 101485, https://doi.org/10.1016/j.quageo.2023.101485, 2024.
- Buylaert, J.-P., Jain, M., Murray, A. S., Thomsen, K. J., Thiel, C., and Sohbati, R.: A robust feldspar luminescence dating method for Middle and Late Pleistocene sediments: Feldspar luminescence dating of Middle and Late Pleistocene sediments, Boreas, 41, 435–451, https://doi.org/10.1111/j.1502-3885.2012.00248.x, 2012a.
- Buylaert, J.-P., Jain, M., Murray, A. S., Thomsen, K. J., and Lapp, T.: IR-RF dating of sand-sized K-feldspar extracts: A test of accuracy, Radiat. Meas., 47, 759–765, https://doi.org/10.1016/j.radmeas.2012.06.021, 2012b.
- Duller, G. A. T., Gunn, M., and Roberts, H. M.: Single grain infrared photoluminescence (IRPL) measurements of feldspars for dating, Radiat. Meas., 133, 106313, https://doi.org/10.1016/j.radmeas.2020.106313, 2020.
- Duval, M., Guilarte, V., Campana, I., Arnold, L. J., Miguens, L., Iglesias, J., and Gonzalez-Sierra, S.: Quantifying hydrofluoric acid etching of quartz and feldspar coarse grains based on weight loss estimates: implication for ESR and luminescence dating studies, Ancient TL, 36, 1–14, https://doi.org/10.26034/la.atl.2018.522, 2018.
- Erfurt, G. and Krbetschek, M. R.: IRSAR A single-aliquot regenerative-dose dating protocol applied to the infrared radiofluorescence (IR-RF) of coarse-grain K-feldspar, Ancient TL, 21, 35–42, 2003a.
- Erfurt, G. and Krbetschek, M. R.: Studies on the physics of the infrared radioluminescence of potassium feldspar and on the methodology of its application to sediment dating, Radiat. Meas.,

- 37, 505–510, https://doi.org/10.1016/S1350-4487(03)00058-1, 2003b.
- Frouin, M., Huot, S., Mercier, N., Lahaye, C., and Lamothe, M.: The issue of laboratory bleaching in the infrared-radiofluorescence dating method, Radiat. Meas., 81, 212–217, https://doi.org/10.1016/j.radmeas.2014.12.012, 2015.
- Frouin, M., Huot, S., Kreutzer, S., Lahaye, C., Lamothe, M., Philippe, A., and Mercier, N.: An improved radiofluorescence single-aliquot regenerative dose protocol for K-feldspars, Quat. Geochronol., 38, 13–24, https://doi.org/10.1016/j.quageo.2016.11.004, 2017.
- Huot, S., Frouin, M., and Lamothe, M.: Evidence of shallow TL peak contributions in infrared radiofluorescence, Radiat. Meas., 81, 237–241, https://doi.org/10.1016/j.radmeas.2015.05.009, 2015.
- Hütt, G., Jaek, I., and Tchonka, J.: Optical dating: K-feldspars optical response stimulation spectra, Quaternary Sci. Rev., 7, 381–385, https://doi.org/10.1016/0277-3791(88)90033-9, 1988.
- Key, A., Lauer, T., Skinner, M. M., Pope, M., Bridgland, D. R., Noble, L., and Proffitt, T.: On the earliest Acheulean in Britain: first dates and in-situ artefacts from the MIS 15 site of Fordwich (Kent, UK), R. Soc. Open Sci., 9, 211904, https://doi.org/10.1098/rsos.211904, 2022.
- Kook, M., Kumar, R., Murray, A. S., Thomsen, K. J., and Jain, M.: Instrumentation for the non-destructive optical measurement of trapped electrons in feldspar, Radiat. Meas., 120, 247–252, https://doi.org/10.1016/j.radmeas.2018.06.001, 2018.
- Krbetschek, M. R., Trautmann, T., Dietrich, A., and Stolz, W.: Radioluminescence dating of sediments: methodological aspects, Radiat. Meas., 32, 493–498, https://doi.org/10.1016/S1350-4487(00)00122-0, 2000.
- Kreutzer, S., Schmidt, C., Fuchs, M. C., Dietze, M., and Fuchs, M.: Introducing an R package for luminescence dating analysis, Ancient TL, 30, 1–8, https://doi.org/10.26034/la.atl.2012.457, 2012.
- Kreutzer, S., Murari, M. K., Frouin, M., Fuchs, M., and Mercier, N.: Always remain suspicious: a case study on tracking down a technical artefact while measuring IR-RF, Ancient TL, 35, 20– 30, https://doi.org/10.26034/la.atl.2017.510, 2017.
- Kreutzer, S., Mercier, N., and Lamothe, M.: Infrared-radiofluorescence: Dose saturation and long-term signal stability of a K-feldspar sample, Radiat. Meas., 156, 106818, https://doi.org/10.1016/j.radmeas.2022.106818, 2022a.
- Kreutzer, S., Burow, C., Dietze, M., Fuchs, M. C., Schmidt, C., Fischer, M., Friedrich, J., Mercier, N., Philippe, A., Riedesel, S., Autzen, M., Mittelstrass, D., Gray, H. J., and Galharret, J.-M.: Luminescence: Comprehensive Luminescence Dating Data Analysis v.0.9.19, https://CRAN.R-project.org/package=Luminescence (last access: 3 August 2025), 2022b.
- Kumar, R., Kook, M., Murray, A. S., and Jain, M.: Towards direct measurement of electrons in metastable states in K-feldspar: Do infrared-photoluminescence and radioluminescence probe the same trap?, Radiat. Meas., 120, 7–13, https://doi.org/10.1016/j.radmeas.2018.06.018, 2018.
- Kumar, R., Kook, M., and Jain, M.: Sediment dating using Infrared Photoluminescence, Quat. Geochronol., 62, 101147, https://doi.org/10.1016/j.quageo.2020.101147, 2021.
- Lapp, T., Jain, M., Thomsen, K. J., Murray, A. S., and Buylaert, J.-P.: New luminescence measurement facilities

- in retrospective dosimetry, Radiat. Meas., 47, 803–808, https://doi.org/10.1016/j.radmeas.2012.02.006, 2012.
- Li, B. and Li, S.-H.: Luminescence dating of K-feldspar from sediments: A protocol without anomalous fading correction, Quat. Geochronol., 6, 468–479, https://doi.org/10.1016/j.quageo.2011.05.001, 2011.
- Li, B., Jacobs, Z., Roberts, R. G., and Li, S.-H.: Extending the age limit of luminescence dating using the dose-dependent sensitivity of MET-pIRIR signals from K-feldspar, Quat. Geochronol., 17, 55–67, https://doi.org/10.1016/j.quageo.2013.02.003, 2013.
- Liu, L., Yang, S., Li, P., Zhang, J., Li, R., Li, D., Xu, X., Luo, Y., and Yang, X.: First investigation of the luminescence dating of loess in the eastern Tibetan Plateau using K-feldspar MAR MET-pIRIR protocol, Quat. Geochronol., 86, 101648, https://doi.org/10.1016/j.quageo.2024.101648, 2025.
- Lu, Y. C., Wang, X. L., and Wintle, A. G.: A new OSL chronology for dust accumulation in the last 130 000 yr for the Chinese Loess Plateau, Quat. Res., 67, 152–160, https://doi.org/10.1016/j.yqres.2006.08.003, 2007.
- Madsen, A. T., Murray, A. S., and Andersen, T. J.: Optical Dating of Dune Ridges on Rømø, a Barrier Island in the Wadden Sea, Denmark, J. Coast. Res., 23, 1259–1269, https://doi.org/10.2112/05-0471.1, 2007.
- Mittelstraß, D. and Kreutzer, S.: Spatially resolved infrared radiofluorescence: single-grain K-feldspar dating using CCD imaging, Geochronology, 3, 299–319, https://doi.org/10.5194/gchron-3-299-2021, 2021.
- Murari, M. K., Kreutzer, S., and Fuchs, M.: Further investigations on IR-RF: Dose recovery and correction, Radiat. Meas., 120, 110–119, https://doi.org/10.1016/j.radmeas.2018.04.017, 2018.
- Murari, M. K., Kreutzer, S., Frouin, M., Friedrich, J., Lauer, T., Klasen, N., Schmidt, C., Tsukamoto, S., Richter, D., Mercier, N., and Fuchs, M.: Infrared Radiofluorescence (IR-RF) of K-Feldspar: An Interlaboratory Comparison, Geochronometria, 48, 105–120, https://doi.org/10.2478/geochr-2021-0007, 2021.
- Murray, A. S. and Funder, S.: Optically stimulated luminescence dating of a Danish Eemian coastal marine deposit: a test of accuracy, Quaternary Sci. Rev., 22, 1177–1183, https://doi.org/10.1016/S0277-3791(03)00048-9, 2003.
- Murray, A. S., Svendsen, J. I., Mangerud, J., and Astakhov, V. I.: Testing the accuracy of quartz OSL dating using a known-age Eemian site on the river Sula, northern Russia, Quat. Geochronol., 2, 102–109, https://doi.org/10.1016/j.quageo.2006.04.004, 2007.
- Porat, N., Faerstein, G., Medialdea, A., and Murray, A. S.: Re-examination of common extraction and purification methods of quartz and feldspar for luminescence dating, Ancient TL, 33, 22–30, https://doi.org/10.26034/la.atl.2015.487, 2015.
- Prasad, A. K., Poolton, N. R. J., Kook, M., and Jain, M.: Optical dating in a new light: A direct, non-destructive probe of trapped electrons, Sci. Rep., 7, 12097, https://doi.org/10.1038/s41598-017-10174-8, 2017.
- R Core Team: R: A language and environment for statistical computing, R Foundation for Statistical Computing, Vienna, Austria, https://www.R-project.org/ (last access: 3 August 2025), 2020.
- Richter, D., Richter, A., and Dornich, K.: LEXSYG A new system for luminescence research, Geochronometria, 40, 220–228, https://doi.org/10.2478/s13386-013-0110-0, 2013.

- Scerri, E. M. L., Frouin, M., Breeze, P. S., Armitage, S. J., Candy, I., Groucutt, H. S., Drake, N., Parton, A., White, T. S., Alsharekh, A. M., and Petraglia, M. D.: The expansion of Acheulean hominins into the Nefud Desert of Arabia, Sci. Rep., 11, 10111, https://doi.org/10.1038/s41598-021-89489-6, 2021.
- Sontag-González, M. and Fuchs, M.: Spectroscopic investigations of infrared-radiofluorescence (IR-RF) for equivalent dose estimation, Radiat. Meas., 153, 106733, https://doi.org/10.1016/j.radmeas.2022.106733, 2022.
- Sontag-González, M., Mittelstraß, D., Kreutzer, S., and Fuchs, M.: Wavelength calibration and spectral sensitivity correction of luminescence measurements for dosimetry applications: Method comparison tested on the IR-RF of K-feldspar, Radiat. Meas., 159, 106876, https://doi.org/10.1016/j.radmeas.2022.106876, 2022.
- Sontag-González, M., Kumar, R., Schwenninger, J.-L., Thieme, J., Kreutzer, S., and Frouin, M.: Short communication: Synchrotron-based elemental mapping of single grains to investigate variable infrared-radiofluorescence emissions for luminescence dating, Geochronology, 6, 77–88, https://doi.org/10.5194/gchron-6-77-2024, 2024.
- Sontag-González, M., Murari, M. K., Jain, M., Frouin, M., and Fuchs, M.: Further investigations into the accuracy of infrared-radiofluorescence (IR-RF) and its inter-comparison with infrared photoluminescence (IRPL) dating (v1.0.2), Zenodo [data set], https://doi.org/10.5281/zenodo.14507179, 2025.

- Trautmann, T., Krbetschek, M. R., Dietrich, A., and Stolz, W.: Investigations of feldspar radioluminescence: potential for a new dating technique, Radiat. Meas., 29, 421–425, https://doi.org/10.1016/S1350-4487(98)00012-2, 1998.
- Trautmann, T., Dietrich, A., Stolz, W., and Krbetschek, M. R.: Radioluminescence Dating: A New Tool for Quaternary Geology and Archaeology, Naturwissenschaften, 86, 441–444, https://doi.org/10.1007/s001140050649, 1999.
- Trautmann, T., Krbetschek, M. R., and Stolz, W.: A systematic study of the radioluminescence properties of single feldspar grains, Radiat. Meas., 32, 685–690, https://doi.org/10.1016/S1350-4487(00)00077-9, 2000.
- Tribolo, C., Kreutzer, S., and Mercier, N.: How reliable are our beta-source calibrations?, Ancient TL, 37, 1–10, https://doi.org/10.26034/la.atl.2019.529, 2019.
- Varma, V., Biswas, R., and Singhvi, A.: Aspects of Infrared Radioluminescence dosimetry in K-feldspar, Geochronometria, 40, 266–273, https://doi.org/10.2478/s13386-013-0125-6, 2013.
- Yi, S., Buylaert, J.-P., Murray, A. S., Lu, H., Thiel, C., and Zeng, L.: A detailed post-IR IRSL dating study of the Niuyangzigou loess site in northeastern China, Boreas, 45, 644– 657, https://doi.org/10.1111/bor.12185, 2016.
- Zhang, J., Hao, Q., and Li, S.-H.: An absolutely dated record of climate change over the last three glacial–interglacial cycles from Chinese loess deposits, Geology, 50, 1116–1120, https://doi.org/10.1130/G50125.1, 2022.