

AI-Track-tive: open source software for automated recognition and counting of surface semi-tracks using computer vision (Artificial Intelligence)

Simon Nachtergaele<sup>1</sup>, Johan De Grave<sup>1</sup>

<sup>1</sup> Laboratory for Mineralogy and Petrology, Department of Geology, Ghent University, Ghent, 9000, Belgium

Correspondence to: Simon Nachtergaele (Simon.Nachtergaele@UGent.be)

## Abstract

A new method for automatic counting of etched fission tracks in minerals is described and presented in this article. Artificial intelligence techniques such as deep neural networks and computer vision [were](#) trained to detect fission surface semi-tracks [on images](#). The deep neural networks can be used in an open source computer program for semi-automated fission track dating called “AI-Track-tive”. Our custom-trained deep neural networks use YOLOv3 object detection algorithm, which is currently one of the most powerful and fastest object recognition algorithms. The developed program successfully finds most of the fission tracks in the microscope images, however, the user still needs to supervise the automatic counting. The presented deep neural networks have high precision for apatite (97%) and mica (98%). Recall values are lower for apatite (86%) than for mica (91%). [The application can be used online on the web page https://ai-track-tive.ugent.be or after download as an offline application for Windows.](#)

Verwijderd: have been

## Introduction

Fission track dating is a low-temperature thermochronological dating technique applicable on several minerals (mainly apatite and zircon) and glass, and was first described in detail by Fleischer et al. (1975). Since the discovery of the potential of apatite fission track dating for reconstructing thermal histories (e.g. Gleadow et al., 1986; Green et al., 1986; Wagner, 1981), apatite fission track dating has been utilized in order to reconstruct thermal histories of basement rocks and apatite-bearing sedimentary rocks (e.g. Malusà and Fitzgerald (2019); Wagner and Van den haute, (1992)). As of 2020, more than 200 scientific papers with apatite fission track dating results are published every year. Hence, apatite fission track dating currently is a widely applied technique in tectonics and other studies.

Fission track dating techniques are labour-intensive and are highly dependent on accurate semi-track recognition using optical microscopy. Automation of the track identification process and counting could decrease the analysis time and increase reproducibility. Several attempts have been undertaken in order to develop automatic counting techniques (e.g. Belloni et al., 2000; Gold et al., 1984; Kumar, 2015; Petford et al., 1993). The Melbourne Thermochronology Group in collaboration with Autoscan Systems Pty was the first to provide an automatic fission track counting system in combination with Zeiss microscopes. The currently only available automatic fission track recognition software package is called FastTracks. It is based on the patented technology of “coincidence mapping” (Gleadow et al., 2009). This procedure includes capturing microscopy

Gewijzigde veldcode

35 images with both reflected and transmitted light. After applying a threshold to both images, a binary image is obtained. Fission tracks are automatically recognized where the binary image of the transmitted light source and reflected light source coincide (Gleadow et al., 2009). Recently, potential improvements for discriminating overlapping fission tracks were also proposed (de Siqueira et al., 2019).

40 Despite promising initial tests and agreement between the manually and automatically counted fission track samples reported in Gleadow et al. (2009), challenges remain for the track detection strategy (Enkelmann et al., 2012). The automatic track detection technique from Gleadow et al. (2009) incorporated in earlier versions of FastTracks (Autoscan Systems Pty) did not work well in the case of (1) internal reflections (Gleadow et al., 2009), (2) surface relief (Gleadow et al., 2009), (3) over- or underexposed images (Gleadow et al., 2009), (4) shallow-dipping tracks (Gleadow et al., 2009) and (5) very short tracks with very short tails. More complex tests of the automatic counting software (FastTracks) undertaken by two analysts from University of Tübingen (Germany) showed that automatic counting without manually reviewing leads to severely inaccurate and dispersed counting results which are less time-efficient than manual counting using the “sandwich technique” (Enkelmann et al., 2012). However, the inventors continuously developed the system and solved the aforementioned problems. This has resulted in fission track analysis software that is utilized by most of fission track labs and it is generally regarded as the one and only golden standard for automated fission track dating.

50 This paper presents a completely new approach for automatic detection of fission tracks in both apatite and muscovite. Normally, fission tracks are detected using segmentation of the image into a binary image (Belloni et al., 2000; Gleadow et al., 2009; Gold et al., 1984; Petford et al., 1993). Here, in our approach, segmentation strategies are abandoned and replaced by the development of computer vision (so-called Deep Neural Networks) capable of detecting hundreds of fission tracks in a 1000x magnification microscope image. It will be shown later in this paper that artificial intelligence techniques such as computer vision can be a solution for the labour-intensive manual counting, as already recognized by the pioneering work of Kumar (2015). Kumar (2015) was the first to successfully apply one machine learning technique (support vector machine) on a dataset of high quality single (?) semi-track images (30µm by 30µm). The accompanying paper for AI-Track-tive reports results of deep neural networks that can detect one to hundreds of semi-tracks in an individual image of 117.5 µm width and 117.5 µm height. Our new potential solution for apatite fission track dating is currently available as an offline executable program for Windows (.exe) and online on the web page https://ai-track-tive.ugent.be. The Python source code, deep neural networks and the method to train a deep neural network are also available to the scientific community on https://github.com/SimonNachtergaele/AI-Track-tive.

60 1 Methods

1.1 System requirements

AI-Track-tive uses two deep neural networks capable of detecting fission tracks in apatite and in muscovite mica. The deep neural networks have been trained on microscope images taken on 1000x magnification. Using the deep neural networks,

Verwijderd: acquired by most of the fission-track  
Verwijderd: assumed a  
Verwijderd: -

Verwijderd: on  
Verwijderd: x  
Verwijderd: This paper  
Verwijderd: This  
Verwijderd: and  
Verwijderd: with the name “AI-Track-tive”. The  
Verwijderd: .  
Gewijzigde veldcode  
Verwijderd:

75 [unanalysed](#) images can be analysed automatically after which it is possible to apply manual corrections. Although it is tested  
on output from a Nikon Ni-E Eclipse microscope with Nikon-TRACKFlow software (Van Ranst et al., 2020), AI-Track-tive  
is certainly platform-independent. The only required input for AI-Track-tive are .jpg microscopy images from both transmitted  
and reflected light with an appropriate size (e.g 1608x1608px or 804x804px). [The offline windows application of](#) AI-Track-  
80 tive contains a Graphical User Interface (GUI) [and instructions window](#) from which it is easy to choose the appropriate analysis  
settings and the specific images. The only requirements to train a custom-made DNN is a good internet connection and a  
Google account. [The necessary steps to create a database with self-annotated images are specified on our website.](#)

**Verwijderd:** unanalyzed

**Verwijderd:**

## 1.2 Development

**Verwijderd:** For Windows users it is possible to download, subsequently open the folder and execute the .exe file from which the AI-Track-tive program will open. For Apple and Linux users, it is necessary to install some freeware Spyder IDE, Python 3.8 and some specific Python modules (OpenCV and PyQt) before they can run the program. The executable file, Python source code, DNN's and specific instructions can be downloaded ("cloned") on the code repository <https://github.com/SimonNachtergaele/AI-Track-tive>.

85 The software makes use of a self-trained deep neural network based on the Darknet-53 backbone (Redmon and Farhadi, 2018)  
which has become extremely popular in object recognition for all kinds of [object detection](#) purposes. The Darknet-53 backbone  
in combination with YOLOv3 head configuration can be combined and trained to be used as an automatic object detection  
tool. This deep neural network can be trained to recognize multiple classes, for example cats or dogs. The deep neural network  
presented in this paper is trained on only one class, i.e. etched semi-tracks. Two deep neural networks were trained specifically  
for [detecting](#) semi-tracks in apatite and in mica. They were both trained on a manually annotated dataset of 50 images for  
apatite and 50 images for mica.

90 [The offline application](#) "AI-Track-tive" has been developed in Python v3.8 (Van Rossum and Drake Jr, 1995) using several  
Python modules, such as an open source computer vision module called OpenCV (Bradski, 2000). The [offline application](#) is  
constructed using Tkinter (Lundh, 1999). [The online web application is constructed using Python Flask web framework](#)  
(Grinberg, 2018), [JavaScript](#) and [HTML 5](#).

**Verwijderd:** GUI

**Verwijderd:** . The easy-to-handle GUI with multiple interactive windows should make it possible to use the platform on any computer without knowledge of Python programming language (Figure 1)

### 1.2.1 Sample preparation

95 In order to create suitable images for DNN training, we converted the z-stacks ([.nd2 files](#)) acquired by Nikon Ni-E Eclipse  
microscope to single-image .tiff images of 1608 pixels by 1608 pixels using the Nikon Advanced Research software package.  
It is assumed that the microscopy software rotates and horizontally flips the mica images before exporting to .tiff files.  
Subsequently, we converted these images to "smaller" .jpg format using freeware Fiji (Schindelin et al., 2012). In Fiji we  
converted the .tiff images to .jpg using no compression, resulting in 1608px on 1608px images (2.59 MP). We then also  
100 implemented a 0.5 factor compression which resulted in smaller 804px on 804px .jpg images (0.64 MP). [The training dataset](#)  
[consisted of images that were in focus and slightly out of focus.](#)

### 1.2.2 Deep Neural Networks: introduction

Our Deep Neural Network (DNN) consists of two parts: a "backbone" combined with a "head" which detects the class and  
object of interest. As mentioned, we opted for a Darknet-53 backbone (Redmon and Farhadi, 2018) combined with a YOLOv3  
105 head (Redmon and Farhadi, 2018). The Darknet-53 backbone consists of 53 convolutional layers and some residual layers in

between (Redmon and Farhadi, 2018). The Darknet-53 backbone in combination with a YOLOv3 “head” can be trained so that it recognizes an object of choice. The training process is a computer-power demanding process requiring the force of high-end GPU’s that would take several days on normal computers. In order to shorten this training process, it is possible to use powerful GPU units from Google Colab. Using the hosted runtime from Google, it is possible to use the available high-end GPU’s for several hours while executing a Jupyter Notebook.

While many other alternatives are available, we chose for YOLOv3 with Darknet-53 pre-trained model, because it is [freely available](#) and one of the fastest and most accurate convolutional neural networks (Redmon and Farhadi, 2018) at the time of developing this software. With YOLOv3 it is possible to perform real-life object detection using a live camera or live computer screen (Redmon and Farhadi, 2018). From a geologist’s perspective it seems that Artificial Intelligence’s object detection is a very rapidly evolving field in which several new DNN configurations are created every year (e.g. YOLOv4 in 2020). The chances are high that the presented YOLOv3 DNN could already be outdated in some years. Therefore, we will provide all necessary steps to train a DNN which could potentially be more efficient than our current DNN. For these future DNN’s it should be possible to use AI-Track-tive, in which DNN’s can be utilized other than YOLO, [if the user would only apply minor adaptations](#). OpenCV 4.5 can handle other DNN’s than YOLO such as Caffe (Jia et al., 2014), Google’s TensorFlow (Abadi et al., 2016), Facebook’s Torch (Collobert et al., 2002), DLDT Openvino (<https://software.intel.com/openvino-toolkit>) and ONNX (<https://onnx.ai/>).

### 1.2.3 Deep Neural Networks: training and configuration

DNN training includes two steps. The first step includes annotating images with LabelImg (<https://github.com/tzutalin/labelImg>) or AI-Track-tive. These training images were [taken with transmitted light and were](#) square-sized [colour](#) images with a width and height of 117.5µm taken with a Nikon Ni-E Eclipse optical light microscope on 1000x magnification. This first step includes manually drawing thousands of rectangles covering every semi-track. It is advisable to train the DNN on a [dataset in which \(1\) several tracks are overlapping with one another, \(2\) light exposure varies, \(3\) images are slightly out- and in-focus](#). For apatite, we drew a total of 4734 rectangles indicating 4734 semi-tracks in 50 images. For mica, a total of 6212 semi-tracks were added in 50 images. The arithmetic mean of track densities was in this case  $7.9 * 10^5 \frac{\text{tracks}}{\text{cm}^2}$  (Figure 1).

The second step is executing a Jupyter notebook and connecting it to Google Colab (<https://colab.research.google.com>). Google Colab is a free platform where one can execute their Python code using Google’s Graphical Processing Unit (GPU) resources. This gives the possibility to train a DNN in a few hours using much more GPU power than normally available. Google Colab provides a maximum of 8 hours of working time using very powerful (but expensive) GPU’s such as Nvidia Tesla K80, T4, P4 or P100. These GPU’s are utilized to adapt the Darknet53 (.weights) file to the training dataset using a configuration file (.cfg) through an iterative training process during which it will progressively recognize the tracks better. This iterative training process creates for every 100 iterations a new .weights file. [Every training iteration gives a misfit value.](#)

Verwijderd:

Verwijderd: each

Verwijderd: difficult

Verwijderd: 2

called the “average loss”. The “average loss” is a value that expresses the accuracy of track recognition of the trained .weights file. This average loss value is high in the beginning of the training process ( $\sim 10^3$ ) but decreases to  $<10$  after a few hours of training. The speed of the iterative training process depends on many factors that are specified in the YOLOv3 head. It is possible to change the training process by adapting the configuration of the YOLOv3 head in the .cfg file. In the .cfg file, several configuration parameters of the DNN are specified such as for example the learning rate and network size. The network size is in our case was  $416 \times 416$ , implying that it will resize our images of  $804 \times 804$  to  $416 \times 416$ . We experienced that increasing the network size from  $416 \times 416$  to  $608 \times 608$  or increasing image size from  $804 \times 804$ px to  $1608 \times 1608$ px strongly decreases the iteration speed. Hence, we chose to train a DNN with  $416 \times 416$  network size using pictures of  $804 \times 804$ px.

#### 1.2.4 Deep Neural Networks: testing

The efficiency of every trained DNN can be tested using images (“test images”) that are not part of the training dataset. When YOLOv3 configuration is used to find the object of interest (semi-tracks), it predicts a high number of bounding boxes with each a different place, width, height and confidence value in the image. The confidence value is normally high ( $>95\%$ ) for the easy recognisable tracks and rather low for the less obvious semi-tracks, as illustrated in Figure 2. A user-defined threshold value defines the threshold value (e.g. 50%) above which rectangles are drawn on test image. For one semi-track, YOLOv3 predicts several overlapping bounding boxes (Redmon et al., 2016). Therefore, an essential non-maximum suppression step leads to one rectangle surrounding the semi-track. In the often occurring scenario that several semi-tracks coincide or overlap, it is highly likely that only one rectangle is drawn after a conservative non-maximum suppression filtering. AI-Track-tive sometimes struggles with identifying multiple tracks even though we adapted the “nms\_thresh” value in order to allow the drawing of multiple boxes in the case of coinciding semi-tracks.

## 2 Results

### 2.1 AI-Track-tive: new open source software for semi-automatic fission track dating

The result of the unique strategy for automated fission track identification is embedded in AI-Track-tive. AI-Track-tive is available in two forms: one offline and one online application. The downloadable offline application is typically for Windows users and requires installation on pc/laptop. The online application does not require any installation. It is hosted on <http://ai-track-tive.ugent.be>. The web app is successfully tested on Google Chrome and Mozilla Firefox. The online app does not allow (1) automatic etch pit size determination and (2) live track recognition. The core of AI-track-tive, i.e. fission track counting is possible using both the on- and offline application. Currently, AI-Track-tive is developed for apatite and external detector (mica). The user can import one or two transmitted light images with different z-level in AI-Track-tive from which it will create a blended image through which the focal level can be changed manually. This way, the analyst gets a 3D impression of the image containing the tracks. The user also has the

Verwijderd: 3

Verwijderd: for

Verwijderd: in the “

Verwijderd: ” program

Verwijderd: kinds

Gewijzigde veldcode

Verwijderd: It is an interactive program useful for analysing several types of samples, such as (1) an

Verwijderd: and external detector couple, (2)

Verwijderd: an

Verwijderd: covering a Uranium-doped glass and (3) only apatite (Figure 1), e.g. for LAFT analysis.

Verwijderd: needs

200 possibility to import reflected light images from which it is possible to change rapidly using the computer mouse wheel function.

The user can optionally choose for a region of interest in which the fission tracks will be sought. The user can choose between the different options with different sizes. When all settings are filled in and all images are uploaded, AI-Track-tive finds and annotates the detected fission tracks in less than a few seconds. Due to the very rapid YOLOv3 algorithm (Redmon et al., 2016; Redmon and Farhadi, 2018), it is possible to instantaneously detect the semi-tracks in the loaded images. The result of the track recognition is an image in which every detected fission track is indicated with a rectangle comprising the detected fission track. Every track for which its rectangle is located with more than half of its area inside the region of interest is counted. Each track has a certain confidence score, as illustrated on Figure 2. This confidence score is close to 1 for easily recognisable tracks and much lower for overlapping tracks. This confidence score is shown on Figure 2 for illustration, but normally it is not displayed. Currently, track detection is not 100% successful for every image. Therefore, manually reviewing is absolutely necessary and essential to obtain useful data. While reviewing the track detection results, it is possible to switch between reflected and transmitted light images. Unidentified semi-tracks can be manually added and mistakenly added tracks can be removed using the computer mouse buttons following the instructions. These manual corrections will be displayed immediately in a different colour on the microscope image. The manual corrections that each user does on the website will be saved in our database. This data can be used later as a potential dataset for DNN training.

215 The adjusted image is saved as a .png or .jpg file after the manual revision process is completed. Track counting results are exported in .csv files together with all useful information. Hence, performing your own zeta-calibration (Hurford and Green, 1983) or GQR calibration (Jonckheere, 2003) is possible.

#### 2.1.1 AI-Track-tive: live fission track recognition

220 Due to the accurate and fast nature of the YOLOv3 object detection algorithm, it is possible to do real-time object detection (Redmon and Farhadi, 2018). This real-time track detection is only available on the offline application because, because of the lack of the required GPU power on our server. In the offline, downloadable application of AI-Track-tive it is possible to let a DNN detect fission tracks on live images from your computer screen. The only drawback for the “live fission track recognition” is the computer processing time of approximately 0.3 to 0.5 seconds, depending on the hardware of the computer system. Real-time object detecting neural networks are much more useful in environments in which the detected objects are dynamic. Obviously, etched semi-tracks are static, so it is not so helpful to detect fission tracks on live images. The usefulness of this “live recognition” function might be twofold. The first application lies in the fast evaluation of the trained Deep Neural Networks. The second potential application relates to an implementation into microscope software. “Smart” microscopes using live semi-track recognition could distinguish apatite (containing semi-tracks) from other minerals which are in between the apatite grains.

Verwijderd: to

Verwijderd: a square-shaped 100µm by 100µm grids, a user-defined polygonal, or a user-defined circular window with an adaptable diameter (Figure 1)

Verwijderd: surface

Verwijderd: polygon (or

Verwijderd: )

Verwijderd: 3

Verwijderd: 3

Verwijderd: by scrolling the computer mouse wheel

Verwijderd: written in the instructions window

Verwijderd: track

Verwijderd:

2.1.2 AI-Track-tive: DNN training

It is possible to use AI-Track-tive to construct a training dataset for further DNN training based on a custom dataset. This training dataset can be created by loading [transmitted light](#) images in AI-Track-tive and highlighting the tracks manually. This way, an unexperienced programmer [could use this software](#) instead of other dedicated (and more widely-tested) software (Labellng) to create a training dataset comprising images (.jpg) and accompanying annotations (.txt) files.

[In the online application it is possible to fill in details of the optical microscope on which you collected the images. These manual track annotation measurements will be downloaded in the client's browser and also stored in a database containing all image parameters and files.](#)

2.1.3 AI-Track-tive: etch pit diameter size ( $D_{par}$ ) measurement

[The offline application of](#) AI-Track-tive also has the possibility to determine the  $D_{par}$  value (Donelick, 1993) which is the size of the semi-track's etch pits measured in the c-axis direction (Figure 3). For this step, AI-Track-tive does not use DNN's (yet) but instead it uses color thresholding. Color thresholding is the most used technique used for image segmentation. This color thresholding is sensitive to unequal light exposure, but this is [-more or less-](#) solved by a gamma correction. AI-Track-tive filters the  $D_{par}$  values using a threshold based on minimum and maximum size of the etch pits. After the size discrimination step, AI-Track-tive uses another 2 filters based on elongation factor (width-to-height ratio) and directions (or angles) of the etch pits. The threshold values for these filters can be changed when advancing through the Graphical User Interface.

2.2 Semi-track detection efficiency

A series of analyses were undertaken in order to evaluate the efficiency of the semi-track identification in apatite and mica. Several apatite and mica samples with varying areal fission track densities were analysed. The efficiency tests are performed on 50 mica and 50 apatite images that were not included in the training dataset for the DNN development (Figure 4). For almost all images we opted to use a 100µm by 100µm square-shaped region of interest with tens or even hundreds of tracks in the image (Table 1, Table 2). Apatite grains with varying [uranium zoning and spontaneous track densities](#) were analysed. The results of these experiments are listed in Table 1 (apatite) and Table 2 (mica). Widely used metrics for evaluating object recognition success are calculated using the correctly recognized semi-tracks (True Positives or TP), unrecognized semi-tracks (False Negatives or FN) and mistakenly recognized semi-tracks (False Positives or FP). Typical metrics to evaluate the performance of object detection software are precision ( $\frac{TP}{TP+FP}$ ) and recall or true positivity rate ( $\frac{TP}{TP+FN}$ ).

2.2.1 Apatite

For [the apatite images from our test dataset](#), the arithmetic mean of the precision equals 97% and for recall it is 86%. The precision is very high and indicates that very few false positives are found. Only for very low track densities it occurs that precision is lower than 0.8, probably because a few false positives have a relatively high impact in an image where only 20

Verwijderd: potentially

Verwijderd: s

Verwijderd: In AI-Track-tive it is also possible to use AI assistance when creating training images, although this is not recommended because of the possibility of copying the AI's mistakenly identified semi-tracks.

Verwijderd: 4

Verwijderd: track

Verwijderd: 5

Verwijderd: U

285

tracks are supposed to be recognized. The true positivity rate (=recall) value is 86% and lower compared to the average precision. Despite the overall high scores for recall (Figure 4), it sometimes occurs that recall is lower than 0.8. Hence, it is essential that the unrecognized tracks (false negatives) are manually added.

Verwijderd: 5

2.2.2 External detector

290

For the muscovite images from our test dataset, the arithmetic mean of the precision equals 98% compared to 91% recall. These metrics are both higher than the ones obtained for apatite. The precision is very high (close to 100%) indicating that false positives are scarce. Recall is above 90% and only drops below 80% for a handful of samples with low track densities (Figure 4). The frequency-histogram of the recall values and precision values are less skewed compared to the histograms of apatite (Figure 4).

Verwijderd: 5

Verwijderd: 5

2.3 Analysis time

295

One small experiment was undertaken in which fission tracks were counted in both apatite and external detector. The results of these experiments are summarized in Table 3 and compared to previous results using FastTracks reported in Enkelmann et al. (2012) and more up-to-date values of FastTracks (A. Gleadow, 2020). For our time analysis experiment, 25 coordinates in a pre-annealed Durango sample (A-DUR) and its external mica detector were analysed by the first author. Selecting and imaging 25 locations in the Durango sample and its external detector took 25-35 min using Nikon-TRACKFlow (Van Ranst et al., 2020). Counting fission tracks in 25 locations in one pre-annealed and irradiated Durango sample and its external detector (including manual reviewing) using AI-Track-tive took 30 minutes in total, but it is expected that it takes longer for samples with higher track densities, for example 60 minutes. A full, independent, comparison between existing software packages and the hereby presented software lies outside the scope of this paper.

Verwijderd: 1. It is expected that fission track counting would take some more time for samples with track densities higher than ( $\sim 4 \times 10^5$  tr/cm<sup>2</sup>).

300

3 Discussion

3.1 Automatic semi-track recognition

305

The success rate of automatic track recognition has been tested for several (~50) different images of apatite and external detector (mica) images. The automatic track recognition results show that the computer vision strategy is (currently) not detecting all semi-tracks in apatite (Table 1) and mica (Table 2). Hence, manual reviewing the results and indicating the “missed” tracks (false negatives) is essential.

310

The precision and recall of both the apatite and mica fission track deep neural networks is compared to the areal track densities in scatter plots shown in Figure 4. The upper limit of  $10^7$  tracks/cm<sup>2</sup> was defined as the upper limit for fission track identification using optical microscopy (Wagner, 1978). The lower limit of  $10^5$  tracks/cm<sup>2</sup> was chosen arbitrarily based on the fact that apatite fission track samples in most studies have track densities within the range of  $10^5$  to  $10^7$  tracks/cm<sup>2</sup>. For track densities lower than the arbitrarily set limit of  $10^5$  tracks/cm<sup>2</sup>, it is still possible to apply fission track analysis but it is more

Verwijderd: 5



320 time-consuming with respect to sample scanning and image acquisition (i.e. finding a statistical adequate number of countable tracks in large surface areas and/or high number of individual apatite grains).

The precision and recall values discussed earlier are high and indicate that the large majority of the semi-tracks can be detected in all images [from our test dataset](#). However, coinciding semi-tracks are difficult to detect for both humans and [even deep neural networks](#). Therefore, the trained deep neural networks were trained on 50 images (Table 1) in which the track densities were high and the individual tracks were sometimes hard to identify due to spatial overlap (Figure [1](#)).

Verwijderd: computers

Verwijderd: 2

### 3.2 Current state and outlook

With the development of AI-Track-tive it was possible to successfully introduce artificial intelligence techniques (i.e. computer vision) into fission track dating. The program presented here has comparable analysis speed with other automatic fission track recognition software such as FastTracks from Autoscan [Systems Pty](#) (Table 3). With the current success rates of the [track detection of the](#) program, we think already a significant gain is to be made. However, manually reviewing the automatic track recognition results is still (and will perhaps always be) necessary. [The online web application saves all uploaded pictures, including all manual annotations made by the user. In the online app, it is also possible to provide the microscope type as extra information. All the data \(e.g. pictures, rectangles, other info\) that is uploaded by the users of the online AI-Track-tive application will be stored in a database when executing the application. This data could be used for making other deep neural networks for other minerals, microscopes or etching protocols.](#)

Verwijderd: s

In the near future it seems likely that computer power and artificial intelligence techniques will inevitably improve. Therefore, smarter deep neural networks with higher precision and recall values will likely be developed in the (near) future. Although we did only work with YOLOv3 algorithms [\(Redmon and Farhadi, 2018\)](#), we expect that other deep neural networks can also be used in AI-Track-tive. AI-Track-tive is an open source initiative without any commercial purpose. [The offline application is entirely](#) written in Python, a popular programming language for scientists, so that it can be continuously developed by other [scientists](#) in the future. [The back-end of the online application is written using Python's Flask micro web framework. The front-end of the online application is written in standard programming languages \(JavaScript and HTML 5\).](#) We would appreciate voluntarily bug reporting to the developers. [Future software updates will be announced on https://github.com/SimonNachtergaele/AI-Track-tive and on the website https://ai-track-tive.ugent.be.](#)

Verwijderd: s

Verwijderd: It is

Verwijderd: s

Verwijderd:

Gewijzigde veldcode

Verwijderd:

## 345 4 Conclusions

In this paper we present a free method to train deep neural networks capable of detecting fission tracks using any type of microscope. Secondly, we also presented open-source Python-based software called “AI-Track-tive” on which the trained neural networks can be tested. These neural networks can be either tested on acquired images (split z-stacks) or live images coming from the microscope camera. It is possible to use AI-Track-tive for apatite fission track dating of samples and/or

standards. Thirdly, we provided our two deep neural networks and their training dataset which is calibrated or trained on a Nikon Ni-E Eclipse setup.

360 AI-Track-tive is:

- [available through the website https://ai-track-tive.ugent.be](https://ai-track-tive.ugent.be).
- unique because it is, to our knowledge, the first geological dating procedure using artificial intelligence.
- using artificial intelligence (deep neural networks) in order to detect fission tracks automatically.
- capable of successfully finding almost all fission tracks in a sample. The unrecognised tracks can be manually added in an interactive window.
- reliable and robust because it is not really sensitive to changes in optical settings.
- future-oriented since it is software in which other, potentially smarter deep neural networks can be implemented.
- [open source](#) in order to give the opportunity to all scientists to improve their software for free through time.
- [tied to a database where all uploaded photos and information are stored. The uploaded data can be used in the development for other, potentially smarter Deep Neural Networks for apatite, mica or other minerals.](#)

#### 370 **Code availability**

All presented software can be downloaded for free on GitHub using the link: <https://github.com/SimonNachtergaele/AI-Track-tive> and <https://github.com/SimonNachtergaele/AI-Track-tive-online>.

#### **Video supplement**

375 Tutorials [offline application](#) AI-Track-tive: short intro (<https://youtu.be/kW7TmHmI674>) and long tutorial (<https://youtu.be/CRr7B4TweHU>).

#### **Author contribution**

SN conceptualized the implementation of computer vision techniques for fission track detection and trained the deep neural networks. SN (re)wrote the software and performed all experiments described in this paper. SN made the tutorial video that can be found in video supplement. [SN made the website using Python Flask](#). JDG acquired funding, supervised the research and reviewed the manuscript.

#### **Competing interest**

The authors declare that they have no conflict of interest.

Gewijzigde veldcode

Verwijderd: Python-based

Verwijderd: <#>a platform on which custom-made DNN's can be tested on live images or gathered dataset.¶ <#>potentially of use when determining the etch pit diameter ( $D_{pit}$ ).¶

Gewijzigde veldcode

Met opmaak: Hyperlink, Lettertype: Niet Vet

Verwijderd:

Met opmaak: Lettertype: Niet Vet

Verwijderd: ¶

Acknowledgments

SN is very grateful for the PhD scholarship received from FWO [Vlaanderen](#) ([Research Foundation Flanders](#)). Kurt Blom is thanked for [introducing several concepts of website development and setting up the web server for AI-Track-tive](#). We thank [Sharmaine Verhaert for the effort she did on her Mac-OS computer to get the software running](#). We are indebted to Andrew Gleadow, David Chew and Raymond Donelick for their constructive comments during the review process. [We also want to thank David Chew another time for testing the software twice](#). Pieter Vermeesch is acknowledged for excellent additional suggestions, editorial handling [and granting deadline extensions](#).

References

Abadi, M., Barham, P., Chen, J., Chen, Z., Davis, A., Dean, J., Devin, M., Ghemawat, S., Irving, G., Isard, M., Kudlur, M., Levenberg, J., Monga, R., Moore, S., Murray, D. G., Steiner, B., Tucker, P., Vasudevan, V., Warden, P., Wicke, M., Yu, Y. and Zheng, X.: TensorFlow: A System for Large-Scale Machine Learning, in Proceedings of the 12th USENIX Symposium on Operating Systems Design and Implementation (OSDI '16), pp. 265–284., 2016.

Belloni, F. F., Keskes, N. and Hurford, A. J.: Strategy for fission-track recognition via digital image processing, and computer-assisted track measurement, in 9th International Conference on Fission-Track Dating and Thermochronology: Geological Society of Australia Abstracts, pp. 15–17., 2000.

Bradski, G.: The OpenCV Library, Dr Dobbs J. Softw. Tools, 25, 120–125, doi:10.1111/0023-8333.50.s1.10, 2000.

Collobert, R., Bengio, S. and Maréthoz, J.: Torch: a modular machine learning software library, IDIAP Res. Rep., 02–46, 2002.

Donelick, R. A.: Apatite etching characteristics versus chemical composition, Nucl. Tracks Radiat. Meas., 21.604, 1359–0189, 1993.

Enkelmann, E., Ehlers, T. A., Buck, G. and Schatz, A. K.: Advantages and challenges of automated apatite fission track counting, Chem. Geol., 322–323, 278–289, doi:10.1016/j.chemgeo.2012.07.013, 2012.

Fleischer, R. L., Price, P. B. and Walker, R. M.: Nuclear tracks in solids: principles and applications, University of California Press., 1975.

Gleadow, A. J. W., Duddy, I. R., Green, P. F. and Lovering, J. F.: Confined fission track lengths in apatite: a diagnostic tool for thermal history analysis, Contrib. to Mineral. Petrol., 94(4), 405–415, doi:10.1007/BF00376334, 1986.

Gleadow, A. J. W., Gleadow, S. J., Belton, D. X., Kohn, B. P., Krochmal, M. S. and Brown, R. W.: Coincidence mapping - A

Verwijderd: Research Foundation Flanders

Verwijderd: explanations on software security and helping SN out with php forms

Verwijderd:

Verwijderd: and

Verwijderd: We thank Sharmaine Verhaert for taking the time to test our software on a Mac-OS computer.

425 key strategy for the automatic counting of fission tracks in natural minerals, *Geol. Soc. London, Spec. Publ.*, 324(1), 25–36, doi:10.1144/SP324.2, 2009.

Gold, R., Roberts, J. H., Preston, C. C., Mcniece, J. P. and Ruddy, F. H.: The status of automated nuclear scanning systems, *Nucl. Tracks Radiat. Meas.*, 8, 187–197, 1984.

Green, P. F., Duddy, I. R., Gleadow, A. J. W., Tingate, P. R. and Laslett, G. M.: Thermal annealing of fission tracks in apatite  
430 1. A Qualitative description, *Chem. Geol.*, 59, 237–253, 1986.

Grinberg, M.: *Flask web development: developing web applications with Python.*, 2018.

Hurford, A. J. and Green, P. F.: The zeta age calibration of fission-track dating, *Chem. Geol.*, 41, 285–317, doi:10.1016/S0009-2541(83)80026-6, 1983.

Jia, Y., Shelhamer, E., Donahue, J., Karayev, S., Long, J., Girshick, R., Guadarrama, S. and Darrell, T.: Caffe: Convolutional  
435 Architecture for Fast Feature Embedding, *Proc. 22nd ACM Int. Conf. Multimed.*, 675–678, doi:10.1145/2647868.2654889, 2014.

Jonckheere, R.: On the densities of etchable fission tracks in a mineral and co-irradiated external detector with reference to fission-track dating of minerals, *Chem. Geol.*, 41–58, doi:10.1016/S0009-2541(03)00116-5, 2003.

Kumar, R.: Machine learning applied to autonomous identification of fission tracks in apatite, *Goldschmidt2015 Abstr.*, 1712,  
440 2015.

Lundh, F.: *An Introduction to Tkinter*, *Rev. Lit. Arts Am.*, (c), 166, 1999.

Malusà, M. G. and Fitzgerald, P.: *Fission-Track Thermochronology and its Application to Geology*, edited by M. G. Malusà and P. Fitzgerald, Springer International Publishing., 2019.

Petford, N., Miller, J. A. and Briggs, J.: The automated counting of fission tracks in an external detector by image analysis,  
445 *Comput. Geosci.*, 19(4), 585–591, 1993.

Van Ranst, G., Baert, P., Fernandes, A. C. and De Grave, J.: Technical note: Nikon – TRACKFlow, a new versatile microscope system for fission track analysis, *Geochronology*, 2(1), 93–99, 2020.

Redmon, J. and Farhadi, A.: YOLOv3: An Incremental Improvement, *ArXiv [online]* Available from: <http://arxiv.org/abs/1804.02767>, 2018.

450 Redmon, J., Divvala, S., Girshick, R. and Farhadi, A.: You Only Look Once: Unified, Real-Time Object Detection, *Proc. IEEE Conf. Comput. Vis. pattern Recognit.*, 779–788, 2016.

Van Rossum, G. and Drake Jr, F. L.: *Python reference manual*, Amsterdam., 1995.

Schindelin, J., Arganda-Carreras, I., Frise, E., Kaynig, V., Longair, M., Pietzsch, T., Preibisch, S., Rueden, C., Saalfeld, S.,

455 Schmid, B., Tinevez, J. Y., White, D. J., Hartenstein, V., Eliceiri, K., Tomancak, P. and Cardona, A.: Fiji: An open-source  
platform for biological-image analysis, *Nat. Methods*, 9(7), 676–682, doi:10.1038/nmeth.2019, 2012.

de Siqueira, A. F., Nakasuga, W. M., Guedes, S. and Ratschbacher, L.: Segmentation of nearly isotropic overlapped tracks in  
photomicrographs using successive erosions as watershed markers, *Microsc. Res. Tech.*, 82(10), 1706–1719,  
doi:10.1002/jemt.23336, 2019.



460 Wagner, G. A.: Archaeological applications of fission-track dating, *Nucl. Track Detect.*, 2(1), 51–63, doi:10.1016/0145-  
224X(78)90005-4, 1978.

Wagner, G. A.: Fission-track ages and their geological interpretation, *Nucl. Tracks*, 5(1–2), 15–25, doi:10.1016/0191-  
278X(81)90022-6, 1981.

Wagner, G. A. and Van den haute, P.: Fission-Track dating, Kluwer Academic Publishers, Dordrecht., 1992.

465

## Figures

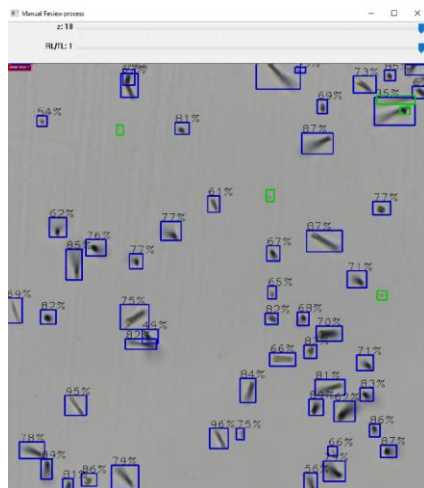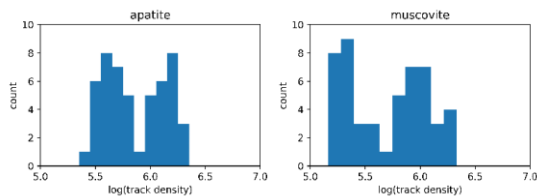

**Met opmaak: Kop 1**

**Verwijderd:** ¶

## AI-Track-tive

### \* How to install?

- download AI-Track-tive project on <https://github.com/SimonNachtergaele>
- follow instructions for Windows, Mac-OS or Linux
- open .exe file or run Python code in Python code editor

- \* Determines track density in apatite/mica (tutorial

- load .weights file (DNN for apatite) from **option A**

- load .weights file (DNN for mica) obtained in **optio**

- load YOLOv3 configuration file (.cfg)
- select reflected light and transmitted light images of apatite and/or ED
- select Region Of Interest: square, custom polygon
- manual check of the automatic track identification

- \* Live fission track recognition (tutorial available)

- \* Etch pit diameter ( $D_{\text{par}}$ ) measurement (tutorial available)

- Electron probe diameter (E<sub>probe</sub>) measurement (calculated as)

- 

### Graphical User Interface (GUI)

Insert all the necessary information below

### Graphical User Interface (GUI)

Insert all the necessary information below

Enter the location of the target network for synthesis. For yafos2 FPGA, this is a file ending on `angriffs`

Machine learning TUs: Task-1: `task-1-fuse-mln-angriffs` Task-2: `task-2-fuse-mln-angriffs`

Enter the location of the target network for mlc. For yafos2 FPGA, this is a file ending on `angriffs`

Machine learning TUs: Task-1: `task-1-fuse-mln-angriffs` Task-2: `task-2-fuse-mln-angriffs`

Enter the location of the configuration file for the target network. For yafos2 FPGA, this is a file ending on `angriffs`

Machine learning TUs: Task-1: `task-1-fuse-mln-angriffs` Task-2: `task-2-fuse-mln-angriffs`

Enter the output directory below

Machine learning TUs: Task-1: `task-1-fuse-mln-angriffs` Task-2: `task-2-fuse-mln-angriffs`

How wide is your image in pixels? (and the same for corners as a decimal separator)

1024.0

How wide is your image in micrometers? (and the same for corners as a decimal separator)

117.5

What is your sensor resolution? (e.g. 1280x800)

768x512

Click here if you want to save the above information

☐ count tracks and receive manually

☐ perform door measurement

☐ let the specific FPGA track on only five sensors

☐ make 'ghosts' for test by annotating the tracks

☐ show intermediate windows

Continue

Insert DNN and other info

**Figure 1: Visual representation of the presented AI-Track-tive software and its functionalities**

**Verwijderd: 2**

**Verwijderd: 3**

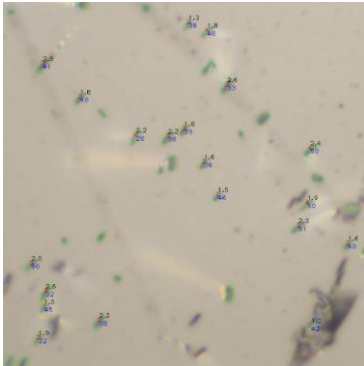


Figure 3: example of semi-automatic  $D_{00r}$  measurement result obtained on a part of an image taken on 1000x magnification. The green ellipses are the remainders from a segmentation process. The values written next to the ellipses stand for length in  $\mu\text{m}$  (black), elongation factor (red) and angle (blue). Some green ellipses show no values because they have been excluded by the elongation filter, direction filter, minimum size filter or maximum size filter.

Verwijderd: 4

Met opmaak: Subscript

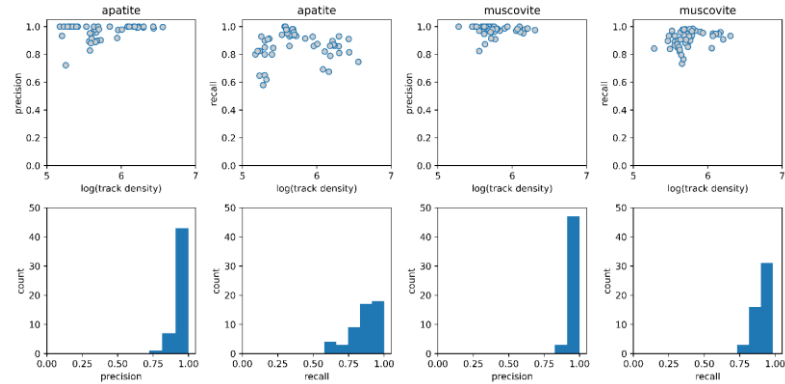


Figure 4: Performance metrics of the deep neural networks obtained on a dataset containing 50 “test images”. The precision (true positives/(true positives + false positives)) and recall (true positives/(true positives + false negatives)) of the automatic fission track recognition deep neural network are shown for apatite and muscovite mica (external detector). The 10-based log of areal track density (tracks/ $\text{cm}^2$ ) is shown on the horizontal axis of the upper scatter plots. The frequency-histograms below show the distribution of the performance metrics.

Verwijderd: 5

Tables

Table 1: test results of the automatic fission track recognition in apatite (confidence threshold = 0.1). Areal track density is expressed in tracks/cm². The number of correctly automatically detected tracks (True Positives), manually detected tracks (False Negatives) and erroneously detected tracks (False Positives) are indicated by  $n_{\text{auto}}$  and  $n_{\text{manual}}$  and  $n_{\text{auto false}}$ , respectively.

Testing	Area (µm²)	Track density	Total	$n_{\text{auto}}$	$n_{\text{manual}}$	$n_{\text{auto false}}$	precision	recall
BC-04 X12	10000	9.10E+05	91	80	13	2	98%	86%
BC-04 X16	10000	2.73E+06	273	225	51	3	99%	82%
BC-04 X18	10000	3.62E+06	362	271	92	1	100%	75%
BC-04 X19	10000	1.73E+06	173	150	23	0	100%	87%
BC-04 X21	4280	1.21E+06	52	36	16	0	100%	69%
BC-04 X24	2745	1.46E+06	40	27	13	0	100%	68%
DUR-G2 X21	10000	1.50E+05	15	12	3	0	100%	80%
DUR-G2 X22	10000	2.00E+05	20	18	2	0	100%	90%
DUR-G2 X23	10000	2.00E+05	20	16	4	0	100%	80%
DUR-G2 X24	10000	2.30E+05	23	21	2	0	100%	91%
DUR-G2 X25	10000	1.70E+05	17	11	6	0	100%	65%
DUR-G2 X26	10000	1.70E+05	17	14	3	0	100%	82%
DUR-G2 X27	10000	2.00E+05	20	13	7	0	100%	65%
DUR-G2 X28	10000	2.00E+05	20	17	3	0	100%	85%
DUR-G2 X29	10000	2.10E+05	21	13	8	0	100%	62%
DUR-G2 X30	10000	2.60E+05	26	22	4	0	100%	85%
DUR-G2 X31	10000	2.20E+05	22	20	2	0	100%	91%
DUR-G2 X32	10000	9.00E+04	9	8	1	0	100%	89%
DUR-G2 X33	10000	1.90E+05	19	11	8	0	100%	58%
DUR-G2 X35	10000	2.50E+05	25	20	5	0	100%	80%
DUR-G2 X41	10000	1.60E+05	16	14	3	1	93%	82%
F115 X03	10000	1.98E+06	198	170	28	1	99%	86%
F115 X04	10000	1.73E+06	173	149	24	0	100%	86%
F115 X05	10000	1.28E+06	128	105	23	0	100%	82%
F115 X07	10000	1.63E+06	163	147	17	1	99%	90%
F115 X08	10000	1.99E+06	199	186	14	1	99%	93%
F115 X09	10000	1.68E+06	168	147	22	1	99%	87%
F115 X10	10000	1.51E+06	151	130	21	0	100%	86%
BC-04 X3	10000	7.00E+05	70	64	6	0	100%	91%
BC-04 X6	10000	1.52E+06	152	120	32	0	100%	79%
BC-04 X7	10000	2.00E+06	200	162	38	0	100%	81%
BC-04 x14	10000	8.80E+05	88	89	7	8	92%	93%
BC-04 X17	10000	1.02E+06	102	91	13	2	98%	88%
BC-04 X20	10000	1.80E+05	18	26	2	10	72%	93%
BC-04 X22	10000	2.69E+06	269	245	24	0	100%	91%
A-DUR-G1 X21	10000	4.60E+05	46	45	3	2	96%	94%
A-DUR-G1 X22	10000	3.40E+05	34	32	2	0	100%	94%
A-DUR-G1 X23	10000	4.30E+05	43	40	3	1	98%	93%
A-DUR-G1 X24	10000	3.70E+05	37	42	0	5	89%	100%
A-DUR-G1 X25	10000	4.80E+05	48	53	1	6	90%	98%
A-DUR-G1 X26	10000	4.00E+05	40	43	1	4	91%	98%
A-DUR-G1 X27	10000	3.80E+05	38	48	0	10	83%	100%
A-DUR-G1 X28	10000	5.30E+05	53	55	4	6	90%	93%
A-DUR-G1 X29	10000	4.70E+05	47	52	1	6	90%	98%
A-DUR-G1 X30	10000	4.50E+05	45	48	3	6	89%	94%
A-DUR-G1 X31	10000	4.00E+05	40	40	2	2	95%	95%
A-DUR-G1 X32	10000	3.80E+05	38	40	0	2	95%	100%
A-DUR-G1 X33	10000	4.30E+05	43	37	6	0	100%	86%
A-DUR-G1 X34	10000	4.90E+05	49	47	2	0	100%	96%
A-DUR-G1 X35	10000	3.90E+05	39	44	1	6	88%	98%
A-DUR-G1 X36	10000	5.00E+05	50	48	3	1	98%	94%
Arithmetic mean							97%	86%



Table 2: test results of the automatic fission track recognition in muscovite mica (confidence threshold = 0.3). Areal track density is expressed in tracks/cm². The number of correctly automatically detected tracks (True Positives), manually detected tracks (False Negatives) and erroneously detected tracks (False Positives) are indicated by  $n_{\text{auto}}$  and  $n_{\text{manual}}$  and  $n_{\text{auto false}}$ , respectively.

Testing	Area ( $\mu\text{m}^2$ )	Track density	Total	$n_{\text{auto}}$	$n_{\text{manual}}$	$n_{\text{auto false}}$	precision	recall
GL 16 X31	10000	5.20E+05	52	47	5	0	100%	90%
GL 16 X32	10000	3.60E+05	36	33	4	1	97%	89%
GL 16 X33	10000	5.30E+05	53	48	7	2	96%	87%
GL 16 X34	10000	4.50E+05	45	33	12	0	100%	73%
GL 16 X35	10000	5.10E+05	51	48	5	2	96%	91%
GL 16 X36	10000	4.00E+05	40	36	4	0	100%	90%
GL 16 X37	10000	4.70E+05	47	36	11	0	100%	77%
GL 16 X38	10000	3.90E+05	39	34	6	1	97%	85%
GL 16 X39	10000	4.20E+05	42	36	8	2	95%	82%
GL 16 X40	10000	5.90E+05	59	60	5	6	91%	92%
GL 16 X41	10000	3.90E+05	39	34	5	0	100%	87%
GL 16 X42	10000	6.10E+05	61	60	2	1	98%	97%
GL 16 X43	10000	4.40E+05	44	35	9	0	100%	80%
GL 16 X44	10000	4.10E+05	41	35	6	0	100%	85%
GL 16 X45	10000	5.40E+05	54	47	8	1	98%	85%
GL 16 X46	10000	5.10E+05	51	48	5	2	96%	91%
GL 16 X47	10000	4.20E+05	42	35	7	0	100%	83%
F115 X28	10000	1.48E+06	148	145	6	3	98%	96%
F115 X29	10000	1.61E+06	161	148	15	2	99%	91%
F115 X30	10000	7.90E+05	79	77	3	1	99%	96%
F115 X31	10000	1.17E+06	117	113	6	2	98%	95%
F115 X32	10000	1.41E+06	141	140	8	7	95%	95%
F115 X33	10000	1.13E+06	113	98	18	3	97%	84%
F115 X34	10000	8.60E+05	86	82	4	0	100%	95%
F115 X35	10000	2.02E+06	202	193	14	5	97%	93%
F115 X36	10000	6.80E+05	68	68	2	2	97%	97%
F115 X37	10000	1.25E+06	125	118	7	0	100%	94%
F115 X38	10000	1.28E+06	128	126	7	5	96%	95%
F115 X39	10000	5.60E+05	56	53	4	1	98%	93%
F115 X40	10000	1.17E+06	117	111	8	2	98%	93%
FCTG4 X31	10000	5.00E+05	50	50	1	1	98%	98%
FCTG4 X32	10000	5.00E+05	50	45	6	1	98%	88%
FCTG4 X34	10000	6.30E+05	63	63	1	1	98%	98%
FCTG4 X35	10000	6.10E+05	61	58	4	1	98%	94%
FCTG4 X36	10000	3.60E+05	36	42	3	9	82%	93%
FCTG4 X37	10000	1.90E+05	19	16	3	0	100%	84%
FCTG4 X38	10000	5.80E+05	58	54	6	2	96%	90%
FCTG4 X39	10000	5.20E+05	52	54	3	5	92%	95%
FCTG4 X40	10000	3.10E+05	31	26	5	0	100%	84%
FCTG4 X41	10000	4.30E+05	43	39	4	0	100%	91%
ADURG1x1	10000	3.00E+05	30	28	2	0	100%	93%
ADURG1x2	10000	4.80E+05	48	45	3	0	100%	94%
ADURG1x3	10000	4.30E+05	43	48	2	7	87%	96%
ADURG1x4	10000	4.90E+05	49	49	1	1	98%	98%
ADURG1x5	10000	3.60E+05	36	32	5	1	97%	86%
ADURG1x6	10000	4.60E+05	46	46	1	1	98%	98%
ADURG1x7	10000	4.80E+05	48	48	1	1	98%	98%
ADURG1x8	10000	5.70E+05	57	56	1	0	100%	98%
ADURG1x9	10000	2.90E+05	29	26	3	0	100%	90%
ADURG1x10	10000	3.30E+05	33	32	1	0	100%	97%
Arithmetic mean							98%	91%

Table 3: estimated time for 20-30 grains/polygons using different automated track recognition software packages and manual counting results from Enkelmann et al. (2012). Non-specified information is indicated with ns.

	Type	Alignment (min)	Grain selection + imaging (min)	Counting (min)	Analysis/comput er conversion (min)	Total time (min)
Enkelmann et al. (2012)	Analyst 1 FastTracks (Enkelmann et al. 2012)	20	40-60	180-240	40-90	240-410
	Analyst 2 FastTracks (Enkelmann et al. 2012)	20-30	30-60	120-240	90-180	260-510
	Manual (sandwich technique, analyst 1)	10	-	30-45	20 (digitizing data)	60-75
	Manual (sandwich technique, analyst 2)	5-15	-	30-90	20 (digitizing data)	55-125
A. Gleadow (pers. com. 2020)	FastTracks 2020	ns	15-17	10-20	ns	ns
Van Ranst et al. (2020)	Nikon TRACK-Flow ( + manual counting)	10-20	25-35	120-240	5	160-300
This paper	AI-Track-tive & Nikon TRACK-Flow	10-20	25-35	30-60	15	80-130

Tabel met opmaak

Verwijderd: (Durango sample)

Verwijderd: 10-20

Verwijderd: 25-35

Verwijderd: 5

Verwijderd: 70-90