

The Need for Fission Track Data Transparency and Sharing

Murat T. Tamer^{1,2}, Ling Chung³, Richard A. Ketcham², Andrew J. W. Gleadow³

¹State Key Laboratory of Earthquake Dynamics, Institute of Geology, China Earthquake Administration, Beijing 100029, China

²Jackson School of Geosciences, The University of Texas at Austin, 78712 Austin, Texas, U.S.A.

³School of Geography, Earth and Atmospheric Sciences, University of Melbourne, 3010 Melbourne, Victoria, Australia

Correspondence to: Murat T. Tamer (murat@ies.ac.cn)

Abstract. We report a new image-based inter-analyst study to investigate **apatite** fission-track grain selection and analysis by 13 participants from an image data set that included grains of variable quality. Results suggest that participants with less experience show a higher **percentage** of selecting unsuitable grains, while participants from the same laboratories generally provide similar results. Less analysis experience may result in the rejection of suitable grains, or inclusion of unsuitable ones. While inappropriate omission and inclusion can both bias results, the latter is more pernicious due to the standard practice of achieving a predecided number of analyses; particularly in difficult samples, there is a danger of “**compromising data quality and integrity**,” by weakening selection criteria. Juxtaposing selected regions of interest (ROIs) on the same grains indicates that zoned grains and grains with inclusions and defects yield varying track density estimates, indicating that ROI placement can be an influential factor. We propose developing image data repositories for global data transparency **where images and analyses can be seen, reviewed, and re-analysed**, a global guidance for fission-track analysis, digital teaching modules, and open science. We also point out the need for new approaches for zeta calibration that include consideration of grain quality, methods of uranium determination, and etching protocols.

1 Introduction

Apatite fission-track dating and thermal history modeling are widely used for near-surface research in earth sciences, across a large spectrum of subjects such as landscape evolution (Reiners and Shuster 2009; Lemot et al., 2023; Gallen et al., 2023), climate change (Barnes et al., 2012; Qiu and Liu 2018; Yu et al., 2022), glacier-driven exhumation (Balestrieri et al., 1991; Fitzgerald and Goode 2022; Karaođlan et al., 2023), natural resource exploration (Dumitru et al., 1991; Deng et al., 2015; Qiu et al., 2023; Gülyüz et al., 2024) and biodiversity (Kohn et al., 1992; Torres et al., 2013; Bernet et al., 2023). **With the pre-condition of gathered from suitable grains, Six** essential ‘ingredients’ are required for fission-track time-temperature **modelling, the first (1) being selection of grains on the polished and etched grain mount that are suitable for analysis, which then consists of,** the track densities calculated from **(2)** track counts over **(3)** a selected region of interest; **(4)** preferably more than a few tens of confined track lengths per sample; **(5)** **mean etch figure diameter parallel to c-axis (D_{par}) (Donelick, 1993; Burtner et al., 1994; Donelick et al., 1999)**, or chemical information to infer kinetics; and **(6)** an estimate of the ²³⁸U

Deleted: rate

Deleted: squeezing the rockfilling a line in a table”

Deleted: analyzed

Deleted: Fission

Deleted: Five

Formatted: Font: 10 pt

Deleted: modeling

Deleted: :

Deleted: 1

Deleted: 2

Deleted: 3

Deleted: 4

Deleted: average etch pit diameter (D_{par}) measurements per grain

Formatted: Subscript

Deleted: 5

Formatted: Superscript

concentration (Tagami and O'Sullivan 2005). All of these inputs are still largely analyst-driven, although some new technologies are being developed to alleviate this. Recent developments in image analysis and AI have contributed significant advances in auto-counting and auto-measurement (Gleadow et al., 2009, 2019; Nachtergaele and De Grave 2021; Li et al., 2022; Ren et al., 2023; Boone et al., 2023b), but are not yet in a position to replace human decision making. Similarly, laser ablation mass spectrometry has become an alternative (Hasebe et al., 2004) to the widely used external detector method (EDM) (Gleadow and Lovering 1977) for uranium content determination, and U mapping has been developed to help account for U zonation (Ansberque et al., 2021); these obviate some human decisions, but may add others.

Deleted: Throughout the years, developments brought new aspects in fission track data analysis. While IL

Deleted: 1

Deleted: while

Deleted: in the recent years, offering a revelation of possible

Deleted: :

55 Previous apatite fission-track inter-laboratory and inter-analyst experiments showed significant variation in measurements for the same samples and even standards (Naeser et al., 1981; Miller et al., 1985, 1990, 1993; Barbarand et al., 2003; Ketcham et al., 2009; Sobel and Seward, 2010; Ketcham et al., 2015; Ketcham et al., 2018; Tamer et al., 2019). These variations have been attributed to a broad range of factors, including instrumentation, analytical preferences, etching protocol, and analyst selection criteria. A common feature in these experiments (except Tamer et al., 2019, which compared only two analysts) is that there was no direct control over what analysts observed. In most cases participants has their own aliquots of study samples, and in experiments where all analysts measured the same grain mounts they undoubtedly looked at different sets of grains. Moreover, until the advent of efficient computational tools, there has been limited ability to document and compare the counted areas within measured grains. As a result, ingredients (1) and (3) above have not been quantitatively explored as sources of variation in dates, even though they may exert a first-order influence on the data quality and extractable thermal history information.

Deleted: ., The first four inputs are still largely analyst-driven, although recent developments in image analysis and AI have contributed significant advances in auto-counting and auto-measurement (Gleadow et al., 2009, 2019; Nachtergaele and De Grave 2021; Li et al., 2022; Ren et al., 2023; Boone et al., 2023).

Deleted: a

Deleted: people

Formatted: Font: Not Bold

Formatted: Font: Not Bold

Deleted: ; i

Formatted: Font: Not Bold

Formatted: Font: Not Bold

Formatted: Font: Not Bold

65 Similarly, again with the exception of Tamer et al. (2019), different analysts have never evaluated and measured the same sets of features for confined track measurement, and their decisions concerning individual features have not been captured, limiting the means to compare and evaluate ingredient (4).

70 From a given set of grains, grain selection influences results in several ways. Grains where oily and aqueous fluids have penetrated into tracks may hinder the recognition of some surface tracks, causing confined tracks to appear shorter and thus more annealed (Ketcham et al., 2015), leading to underestimation of ages and overestimation of temperatures. Grains with excessive defects, such as polishing artefacts or etched dislocations, may cause misidentification of some spurious features as actual tracks and cause overestimation of ages, or underestimation of the presence of overlooked defects may cause the analyst to lean toward "defect" for questionable features. Track density can vary by up to 35% if the grain is not oriented with the c-axis in the viewing plane (Aslanian et al., 2022), making both the resulting age and etch figure dimensions (e.g. D_{par}) inaccurate, thereby affecting estimates of kinetics and initial track length. A perceived need to meet targets for the number of grains analysed may cause an analyst to select borderline-acceptable grains or tracks that may not have been selected otherwise (Tamer and Ketcham, 2023).

Deleted: The process of selecting suitable grains, and regions of interest within those grains, has been relatively unexplored in these studies but may exert a first-order influence on the data quality and extractable thermal history information.

Deleted: .

Deleted:

Deleted: if the grain is oriented without the c-axis in the viewing plane ...

Formatted: Subscript

Deleted: analyzed

Whereas the area counted for fission-track density determinations has historically been defined by boxes in an eyepiece reticule, recent image-based systems allow the user to draw an arbitrarily shaped region of interest. In both cases, this process must be executed with care. Regions of interest need to be placed so that the grain surface they encompass is not biased with respect to the ability to host detectable tracks. Regions of interest within one fission-fragment range of the grain edge will not sample tracks from a full 4π geometry (Fleischer et al., 1975), and including sizable defects and cracks in the region of interest may result in uncountable areas; both effects will bias ages lower. Regions of interest that include zones with different U content complicate the accurate determination of U across the track-generating region (Vermeesch, 2017), and suffer edge effects from sampling a 4π region that hosts variable U concentration. This bias can result both from methods using laser ablation, where typically a smaller area is sampled for the U-determination than for the spontaneous track count, and the external detector method, where perfect matching between spontaneous and induced track regions of interest can be difficult to achieve, especially where the track density is low.

Deleted: typically

Deleted: modern

Deleted: Donelick

Deleted: 2005

Deleted: is variable

The typical number of grains for age measurements for igneous-type samples is ~ 10 (Wagner and Van den Haute, 1992), though more are needed if there is any indication of kinetic variation, while for detrital samples it is ~ 120 or more (Vermeesch 2004). If grains are few or of low quality, an analyst may consciously or unconsciously add some borderline-quality grains to meet goals for data quantity. Similarly, having a pre-determined goals for numbers of confined tracks per sample can incentivize accepting lengths that might otherwise be passed over. For both data types, aiming for specific quantities of data may eventually cause a loss of quality.

Deleted: suggested

Deleted: typically

Deleted: 20

Deleted: or

Deleted: ;

Deleted: (Donelick et al., 2005)

Deleted: "filling a line in a table squeeze the rock" by adding

Deleted: provide the expected

Deleted:

Deleted: A

We carried out a new apatite fission track inter-analyst experiment designed to investigate variability in grain selection and region of interest definition criteria. Building upon a previous two-analyst study (Tamer et al., 2019), we also tested the identification of confined track lengths. Participants were asked to perform apatite FT analysis on a selection of grains drawn from an identical image set featuring variable grain quality using software that records all details of the analysis as overlays in a .xml file, thereby allowing for subsequent review. Analysts were also asked to fill out a questionnaire about their approach.

2 Materials and Methods

Deleted: ¶

2.1 Image Data Repository

We created an image data repository consisting of 41 apatite grain and 3 graticule (length calibration grid on a microscope slide) images from the in-house fission-track data repositories at the University of Melbourne (UM) and the University of Texas at Austin (UT). Images from UM were captured by Ling Chung using a Zeiss Axio Imager M1m microscope with an IDS μ Eye camera and white balance correction, while images from UT were taken by Sean Sanguinito and Murat Tamer,

Deleted: using a Zeiss Axio Imager M2m microscope with Olympus SYS UC30 camera and no white balance. Grains from UT were etched with 5.5M HNO₃ at 21°C for 20s (Carlson et al., 1999), while the grains from UM were etched with 5M HNO₃ at 20°C for 20s (Gleadow et al. 1986; Green et al., 1986). The images used in this study can be viewed at geochron@home (Vermeesch 2024). 36 grains were selected for track density measurements and 5 for confined track length measurements. To test the self-reproducibility of the analytical results we repeated one grain image as two different grain areas (Grains 07 and 16). The grain descriptions are given in supplementary file Table S1.

Formatted: Normal, Line spacing: single

Grain	Image Source	Description
1	UM	Not parallel to c-axis, not acceptable
2	UM	Fluid in tracks, not acceptable
3	UM	Not 100% C-parallel and with low number of inclusion but acceptable.*
4	UM	Acceptable grain
5	UM	Acceptable if the parts with inclusions are excluded
6	UM	Not parallel to c-axis, not acceptable
7	UM	Acceptable if the parts with inclusions and dislocations (left hand corner) are excluded
8	UM	Too many inclusions, not acceptable
9	UM	Acceptable if the parts with inclusions and cluster of small disturbing surface features are excluded
10	UM	Not parallel to c-axis, not acceptable
11	UM	Exclusively for length measurement
12	UM	Exclusively for length measurement
13	UM	Exclusively for length measurement
14	UT	Exclusively for length measurement
15	UT	Exclusively for length measurement
16	UM	Acceptable if the parts with inclusions and dislocations (left hand corner) are excluded.
17	UM	Acceptable if the parts with inclusions are excluded
18	UM	Acceptable if the parts with inclusions are excluded
19	UM	Acceptable if the parts with inclusions are excluded
20	UM	Acceptable grain
21	UM	Acceptable grain
22	UM	Acceptable grain *
23	UM	Not parallel to c-axis, not acceptable
24	UT	Fluid in tracks and noticeable uneven track distribution, not acceptable
25	UM	Acceptable grain
26	UM	Acceptable grain*
27	UM	Acceptable grain*
28	UM	Acceptable grain*
29	UM	Acceptable grain
30	UM	Acceptable grain if the parts with inclusions and dislocations are excluded.
31	UT	Too many inclusions, not acceptable
32	UT	Not 100% C-parallel and noticeably uneven track distribution. Borderline grain*
33	UT	Not parallel to c-axis, obvious uneven track distribution, not acceptable
34	UT	Too many inclusions, not acceptable
35	UT	Borderline grain
36	UT	Too many inclusions, not acceptable
37	UT	Low track density, be careful with region of interest selection. Acceptable grain
38	UT	Too many inclusions, not acceptable
39	UT	Not 100% C-parallel but acceptable
40	UT	Too many inclusions, not acceptable
41	UT	Acceptable grain
42	UM	50x2 micron graticule
43	UT	Pyser-SGI Graticule 02A00429 S16 Stage MIC 1mm/0.01mm
44	UT	Pyser-SGI Graticule 02A00429 S16 Stage MIC 1mm/0.01mm

Table 1: Description of images. UT: University of Texas at Austin, UM: University of Melbourne. *: If U ppm is determined using LA-ICP-MS approach, need to cross check counting area as track distribution is slightly uneven.

- Formatted Table ... [1]
- Formatted ... [2]
- Formatted ... [3]
- Formatted ... [4]
- Formatted ... [5]
- Formatted ... [6]
- Formatted ... [7]
- Formatted ... [8]
- Formatted ... [9]
- Formatted ... [10]
- Formatted ... [11]
- Formatted ... [12]
- Formatted ... [13]
- Formatted ... [14]
- Formatted ... [15]
- Formatted ... [16]
- Formatted ... [17]
- Formatted ... [18]
- Formatted ... [19]
- Formatted ... [20]
- Formatted ... [21]
- Formatted ... [22]
- Formatted ... [23]
- Formatted ... [24]
- Formatted ... [25]
- Formatted ... [26]
- Formatted ... [27]
- Formatted ... [28]
- Formatted ... [29]
- Formatted ... [30]
- Formatted ... [31]
- Formatted ... [32]
- Formatted ... [33]
- Formatted ... [34]
- Formatted ... [35]
- Formatted ... [36]
- Formatted ... [37]
- Formatted ... [38]
- Formatted ... [39]
- Formatted ... [40]
- Formatted ... [41]
- Formatted ... [42]
- Formatted ... [43]
- Formatted ... [44]
- Formatted ... [45]

170 using a Zeiss Axio Imager M2m microscope with Olympus SYS UC30 camera and no white balance. Grains from UT were etched with 5.5M HNO₃ at 21°C for 20s (Carlson et al., 1999), while the grains from UM were etched with 5M HNO₃ at 20°C for 20s (Gleadow et al. 1986; Green et al., 1986). The images used in this study can be viewed at geochron@home (Vermeesch 2024). 36 grains were selected for track density measurements and 5 for confined track length measurements. To test the self-reproducibility of the analytical results we repeated one grain image as two different grain areas (Grains 07 and 16). The grain descriptions are given Table 1.

Formatted: Subscript

Formatted: Subscript

Formatted: Font: Not Bold

2.2 Announcement and Participant Instructions

175 The announcement of the study was made at the 17th International Conference on Thermochronology, 2021, Santa Fe (Tamer et al, 2021) and in relevant email lists. The participants were asked to perform track density and confined track length and D_{par} measurements using their preferred approach, including any analytical software, manual measurement, or AI-based analysis. The participants were not instructed to reach a given number of grains or confined track length analyses but were instructed to skip or accept grains for analysis according to their own judgement.

Formatted: Subscript

180 This experiment utilized Fission Track Studio, a dual software suite developed by the Melbourne Thermochronological Research Group (MTRG) that is capable of automatic grain stack-image acquisition (TrackWorks) and image review and measurement (FastTracks). The FastTracks program offers manual and automated analytical tools for obtaining all essential parameters for FT dating as well as a cross-section tool for precise dip angle determination for length measurements. All analytical results were recorded in an .xml file that can be reloaded for a follow-up analysis and review. The University of Melbourne provided a temporary FastTracks license and a detailed user manual for those who wanted to participate in this study. The participants had the option to reveal their names and affiliations or to be anonymous. A participant's submission was accepted only if the analysis was performed by a single analyst.

Deleted: was made possible by

Deleted: ¶

2.3 Reviewer Criteria

190 In the absence of absolute standards, we used the grain selection criteria of L. Chung and the confined track length measurement judgments of M. Tamer as reference points for the review of the participant results. However, no fission-track analyst can claim complete certainty in their judgments about track features and we do not suggest that these reference results represent 'true' values. Rather they are simply used as reference values that are probably typical of reasonably experienced analysts. They were used as the starting point for a detailed grain-by-grain and track-by-track discussion with the participants to arrive at a consensus view and to ascertain which factors are most likely to lead to discrepancies between analysts. Such a detailed analysis has not previously been undertaken to our knowledge and would be all but impossible without the image-based approach used here. To test the objectivity of the reviewers, the participants were shown those of their selections and

200 measurements that the reviewers considered questionable or in some cases, erroneous, after which they could acknowledge or dispute the review.

Grains were judged to be suitable, unsuitable, or borderline [by L. Chung](#). A grain having any of the three following properties was considered unsuitable: (1) the polished surface was not parallel to the c-axis (Fig. 1 a, b), (2) fluids were present in tracks (Fig. 1 c, d), (3) an excessive number of inclusions/defects/uncertain features was intermingled with actual tracks (Fig. 1 e, f). Additionally, heterogeneous U distribution within the grain, judging from the distribution of spontaneous tracks, can be a complicating factor, especially if LAICPMS spot analysis is used for U determination, but also from misalignment of the spontaneous and induced track regions of interest using the EDM. In samples with low abundance and/or low-quality of grains, some borderline-quality grains [which are not %100 parallel to c-axis and/or contain distinguishable abundance of defects and inclusions](#) may be included in the resulting data sets (Fig. 1 g, h). Selection of the region of interest may become a challenge for inclusion/defect-rich (Fig 1 i, j) and zoned grains (Fig 1 k, l). A confined track length is measurable as long as both ends are not exposed (Fig 1 m, n) at the surface, visible and unobscured by surrounding features (Fig 1 o, p). Moreover, it is important that confined tracks are not filled, fully or partially, with oily fluids, such as may result from fingerprints, which significantly affects their optical contrast within the host mineral (Fig 1 q, r). Any measurement that does not meet these criteria is considered invalid.

Thirteen analysts returned completed questionnaires, though one of them could not provide the .xml file due to technical problems. Although L. Chung and M. Tamer evaluated each other's analyses, we consider them as reviewers in this study. Two additional analysts from the same laboratory with different years of experience submitted answers in one combined .xml file. Because they were unable to disentangle their results or reconduct them independently, their results are not included in the analysis below. While some participants wished to remain anonymous, others chose to be transparent with their identities; Table S1 provides the list of participants. Participants' overall and recent experience and their current fission-track setup, a summary of the questionnaire, selection percentages for grains, and validity percentages for confined track lengths are provided in Table 2. Excluding one of the repeated grains for checking self-reproducibility (Grain 16), of the 35 grain image sets, L. Chung estimated that 22 are suitable and 13 are unsuitable for fission track analysis. In grain-by-grain checking, we counted how many of the suitable grains were selected and how many of the unsuitable grains were rejected. Some of the participants used FastTracks' automatic tools for c-axis orientation and D_{gr} length measurements, but we did not track whether these results were accepted as-is or subsequently modified. The resulting suitable and unsuitable grain selection percentages are reported as percentages. M. Tamer examined every measured confined track length to check validity as determined above. The percentage of valid measurements is reported as the confined track length measurement validity percentage. We did not evaluate how many valid tracks were excluded, as there was no way to determine whether such tracks were intentionally omitted or simply missed.

Formatted: Subscript

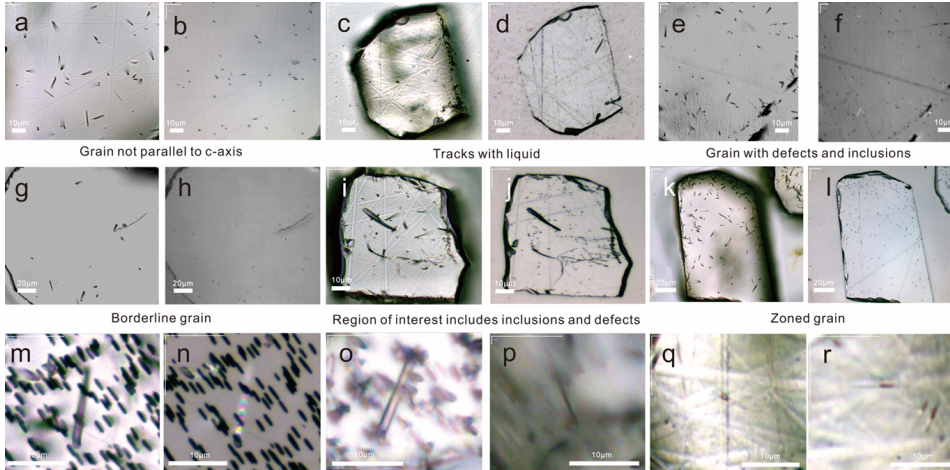


Figure 1: Examples of grains and tracks that could cause erroneous grain and region of interest selection or invalid confined track-length measurement for fission-track analyses. A grain not parallel to the c-axis appears to be acceptable in transmitted light (a), but varying etch pit orientations clearly show that the grain is not parallel to the c-axis in reflected light (b). Transmitted and reflected light images showing how a dirty grain surface with liquids in tracks can impair track recognition (c,d). Transmitted and reflected light images of a grain showing an excess of non-track features such as defect and inclusion that are difficult to distinguish from actual tracks (e, f). Transmitted and reflected light images of a grain with a low and uneven track density, suggesting the possible presence of zoning that would need to be accounted for (g, h). Transmitted and reflected light images of a grain showing large defects and inclusions occupying space obscuring fission tracks, resulting in underestimation of the fission-track density if these features are included in the region of interest (i,j). Transmitted and reflected light images of a zoned grain, for which different placements of the region of interest and location of ablation point(s) may yield divergent ages (k,l). Transmitted and reflected light images of a would-be confined track, where the reflected light image shows one tip may be exposed to the surface (m,n). Confined tracks may also be rendered invalid for measurement by obscuring features (o,p), or partial fluid fillings (q,r).

Formatted: Normal, Line spacing: single

Deleted:

Deleted: 1

Formatted: Font: 9 pt, Bold

Formatted: Normal

Deleted: ¶

Formatted: Font: Bold

Moved down [1]: 3 Results and Discussion ¶

Deleted: ¶

Deleted: Thirteen analysts returned completed questionnaires, though one of them could not provide the .xml file due to technical problems. Although L. Chung and M. Tamer evaluated each other's analyses, we consider them as reviewers in this study. Two additional analysts from the same laboratory with different years of experience submitted answers in one combined .xml file. Because they were unable to disentangle their results or reconstruct them independently, their results are not included in the analysis below. While some participants wished to remain anonymous, others chose to be transparent with their identities; Table S2 S1 provides the list of participants. Participants' overall and recent experience and their current fission-track setup, a summary of the questionnaire, selection rates percentages for grains, and validity rates percentages for confined track lengths are provided in Table 12. Excluding one of the repeated grains for checking self-reproducibility (Grain 16), of the 35 grain image sets, L. Chung estimated that 22 are suitable and 13 are unsuitable for fission track analysis. In grain-by-grain checking, we counted how many of the suitable grains were selected and how many of the unsuitable grains were rejected. Some of the participants used FastTracks' automatic tools for c-axis orientation and Dpar length measurements, but we did not track whether these results were accepted as-is or subsequently modified. The resulting suitable and unsuitable grain selection rates percentages are reported as percentages. M. Tamer examined every measured confined track length to check validity as determined above. The percentage of valid measurements is reported as the confined track length measurement validity rate percentage. We did not evaluate how many valid tracks were excluded, as there was no way to determine whether such tracks were intentionally omitted or simply missed. ¶

Formatted: Normal, Line spacing: single

290

Analyst	Total years of experience	Activity in the past two years	In-house fission-track setup	Auto c-axis assignment tool	Graticule measurement
<u>1</u>	<u>7</u>	<u>Yes</u>	<u>AS</u>	<u>Yes</u>	<u>No</u>
<u>2</u>	<u>14</u>	<u>Yes</u>	<u>AS</u>	<u>No</u>	<u>Yes</u>
<u>3</u>	<u>7</u>	<u>Yes</u>	<u>AS</u>	<u>No</u>	<u>Yes</u>
<u>4</u>	<u>6</u>	<u>Yes</u>	<u>AS</u>	<u>Yes</u>	<u>No</u>
<u>5</u>	<u>5</u>	<u>Yes</u>	<u>AS</u>	<u>Yes</u>	<u>No</u>
<u>6</u>	<u>4</u>	<u>Yes</u>	<u>C</u>	<u>Yes</u>	<u>No</u>
<u>7</u>	<u>6</u>	<u>Yes</u>	<u>C</u>	<u>No</u>	<u>No</u>
<u>8</u>	<u>4</u>	<u>Yes</u>	<u>AS</u>	<u>No</u>	<u>No</u>
<u>9</u>	<u>5</u>	<u>Yes</u>	<u>AS</u>	<u>No</u>	<u>No</u>
<u>10</u>	<u>17</u>	<u>Yes</u>	<u>AS</u>	<u>Yes</u>	<u>Yes</u>
<u>11</u>	<u>30</u>	<u>No</u>	<u>D</u>	<u>No</u>	<u>Yes</u>
<u>12</u>	<u>2</u>	<u>Yes</u>	<u>AS</u>	<u>No</u>	<u>No</u>
<u>13</u>	<u>5</u>	<u>Yes</u>	<u>AS</u>	<u>No</u>	<u>No</u>
<u>14</u>	<u>9</u>	<u>Yes</u>	<u>AS</u>	<u>No</u>	<u>Yes</u>
<u>15</u>	<u>2</u>	<u>Yes</u>	<u>AS</u>	<u>No</u>	<u>No</u>
<u>16*</u>	<u>40</u>	<u>Yes</u>	<u>C</u>	<u>N/A</u>	<u>N/A</u>

Table 2: Summary of the questionnaire, percentages of grain selections, and confined track length measurement validities.

AS: Autoscan, C: Custom; D: Dumitru System. *: The analyst did not participate in the experiment but evaluated the grains as suitable and unsuitable.

Formatted: Normal, Line spacing: single

Formatted: Font: 9 pt, Bold

295 3 Results and Discussion

3.1 Graticule Calibration

Graticule images taken by microscopes at UM and UT were included in the data set for calibration. Although calibration is an essential step before performing an analysis, only five participants reported measuring them. Some omissions may have been due to not fully understanding the terms of the experiment. To make the comparison of results easier, we used the default graticule calibration for all analysts. The graticule measurements are summarised in Table S3. Using default calibration, analysts performed measurements with >99.0% accuracy. Considering the limits of optical microscopy, this accuracy provides measurements within analytical errors.

Deleted: ¶

Formatted: Heading 1

300

Deleted: S2

Deleted: .

3.2 Self-Reproducibility

305 Grains 7 and 16 are duplicated images of the same grain in our data set. While some participants skipped Grain 16 after noticing the repetition, some performed density measurements on both grains. Although these remeasurements demonstrated high self-

reproducibility (Fig 2), minimum and maximum densities vary by $\pm 30\%$. The difference can be traced to the varying region of interest selection, light source utilization (transmitted only, reflected only or both), and track counting routines. Although the zeta method (Hurford and Green, 1983) is intended to normalize some differences among analysts, the degree of variation shown here is more severe than that implied by typical variation in zeta factors ($\sim 20\%$).

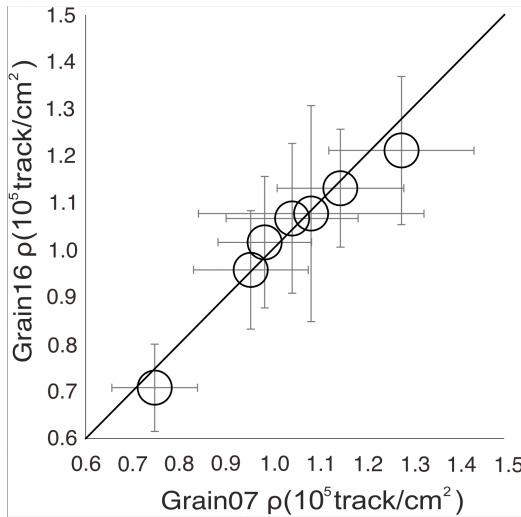


Figure 2: Self-reproducibility of track density (ρ) determinations on replicated grain images for seven analysts.

3.3 Post-review follow-up and objectivity of the review

After the initial review of grain and confined track length measurements, a follow-up meeting with each participant was conducted to discuss each judgment deemed questionable or unsuitable by the reviewers. Virtually all participants acknowledged all inappropriate grain selections and confined track length measurements, except Participant 6 considered Grain 08 and Grain 31 as borderline instead of unsuitable. This high rate of acknowledgment by the participants supports the soundness of the criteria utilized by the reviewers. According to the participants, inappropriate selection and measurements stemmed from different factors. While some participants cited a lack of attention to details (e.g. poor identification of track ends), others stated that they have been choosing some unsuitable grains in their routine fission-track studies since their training. Some of the participants mentioned that they knowingly added unsuitable grains to the data sets in the past to meet the expected number of grains.

Deleted: preference

Formatted: Normal, Line spacing: single

Deleted: ¶

Formatted: Caption

Deleted: . Some of the participants used FastTracks' automatic tools for c-axis orientation and dpar length measurements

3.4 Track Density and Confined Track Length Distributions

This study is designed principally to evaluate identification of individual features rather than measurement averages and standard deviations. If invalid track lengths are measured or unsuitable grains are analysed which give results similar to valid lengths or suitable grains, summary statistics will not suggest any problem; in fact, they would appear to improve by raising the number of analyses, the perverse incentive we wish to counteract. We calculated the suitable and unsuitable grain selection percentages (Table 3) based on the number of grains selected of each type as listed in Table 1. The confined track length measurement validity percentage is calculated as the number of valid track length measurements divided by the total confined track length measurements for each analyst (Table 4). There are several valid lengths etched by both 5.0M and 5.5M etchants that may be under-etched, which were not measured by the reviewer but by some analysts. The reviewer evaluated the lengths based only on the criteria laid out in section 2.3, and not specifically how well-etched they are.

When compiling summary statistics, we separated the density estimates on suitable grains and valid track length measurements from unsuitable ones, and compared them using dispersion and χ^2 probability values for the density data and the mean and standard deviation of mean lengths (Table 3 and 4). Initial density determinations yield a dispersion value of 10 and a χ^2 probability of 0.03. Exclusion of unsuitable grain data provided significant improvements in net density similarity, with dispersion and χ^2 probability respectively 0 and 0.42 (Table 3). Excluding invalid tracks raises the average mean length by $\sim 0.3 \mu\text{m}$, well beyond the precision limit estimated by the standard error, and reduces the group standard deviation by 20%.

The histograms of track density and confined track length distributions of each participant provide additional insights (Fig 3). The density distributions of suitable grains are more consistent than for unsuitable grains, and the inclusion of unsuitable grains in all cases skewed the track density distribution to lower values. Participants 1 and 10 and Participants 8 and 9 are from the same two laboratories and show similarities in their respective track density results. This may be related to the shared training and/or analytical routine in counting, though for length measurements participants 8 and 9 had more divergent results, possibly due to different personal selection criteria. The confined length histograms indicate that the participants varied considerably in not only how many but which tracks they measured. D_{par} measurements on suitable grains tend to be more similar with some outliers, while the D_{par} s of unsuitable grains provide higher dispersion (Fig S1). Post-experiment interviews with participants suggested that the dispersion of D_{par} s on suitable grains may have stemmed from different levels of zoom applied.

Deleted: upon...rincipally to evaluate percentages of identification of individual features rather than measurement averages and standard deviations. If invalid track lengths are measured or unsuitable grains are analysed which are about the same as...ive results similar to valid lengths or suitable grains, the data tables...ummary statistics cannot directly...ill not show...uggest any problem; in fact, it would appear to improve the statistics...hey would appear to improve by raising the number of analyses (or filling a line in a table)... which is...he perverse incentive for not caring about data quality that...e wish to avoid (... [46])

Deleted: Therefore, ...hen compiling summary statistics, we separated the density estimation...s on suitable grains and valid track length measurements from the initial submissions...nsuitable ones, and calculated analyst selection percentages...ompared them (... [47])

Formatted: Superscript

Deleted: and max and min mean track lengths

Deleted:

Deleted: We calculated the suitable and unsuitable grain selection percentages based on the number of grains selected in two grain classifications that is listed in Table 1. ...initial density estimations of the analysts (... [48])

Formatted: Superscript

Deleted: value...robability of 0.03... Exclusion of unsuitable grain data provided significant improvements on the...n data...et density similarity, the (... [49])

Deleted: values...robability are...respectively 0 and 0.42 for the density estimations on suitable grains. ...Table 2 (... [50])

Formatted: Superscript

Deleted: Minimum and maximum mean track lengths of initial length measurements have a difference of $\sim 2.4 \mu\text{m}$ that is reduced to $\sim 1.7 \mu\text{m}$ after excluding invalid length measurements. The confined track length measurement validity percentage is calculated based on number of valid track length measurements proportionate to the total confined track length measurements for each analyst. There are several valid lengths etched by 5.0M and 5.5M etchants that appear to be underetched, which are not measured by the reviewer but by some analysts. We should stress that the reviewer evaluated the lengths only on their validity without considering how well-etched they are.

Deleted: show several patterns...rovide additional insights (Fig 3). The density distributions of suitable grains appear to be somewhat...re more relatable and ...onsistent than for unsuitable grains, and the inclusion of unsuitable grains in all cases skewed the track density distribution to lower values. A similar effect tends to be present in the confined track length distributions, but not in all cases. The confined track length distributions show that the analysts observed and measured different numbers of confined track lengths with a varying number of measurements on valid tracks. Combining all valid tracks yields a histogram with confined track lengths ranging from 8 to 17 μm . An analyst adopting different selection criteria may select confined tracks that were exposed to etchant for different amounts of time (Tamer and Ketcham 2023). (... [51])

Deleted:

Formatted

(... [52])

Analyst	All reported density measurements			Density measurements on suitable grains			Density measurements on unsuitable grains			Suitable grain selection percentage (%)	Unsuitable grain selection percentage (%)
	N	ρ (10^5 track/cm 2)	σ (10^5 track/cm 2)	N	ρ (10^5 track/cm 2)	σ (10^5 track/cm 2)	N	ρ (10^5 track/cm 2)	σ (10^5 track/cm 2)		
1	22	6.25 (35)	3.42	21	6.47 (73)	3.34	1	1.63	N/A	95	8
2	22	6.25 (82)	3.84	22	6.25 (82)	3.84	0	N/A	N/A	100	0
3	29	4.81 (60)	3.23	21	5.62 (70)	3.21	8	2.68 (80)	2.25	95	62
4	23	5.63 (72)	3.44	20	5.82 (59)	3.65	3	4.36 (46)	0.79	91	23
5	11	8.34 (114)	3.79	11	8.34 (114)	3.79	0	N/A	N/A	50	0
6	26	6.71 (70)	3.57	21	6.97 (78)	3.56	5	5.62 (170)	3.80	95	38
7	26	5.95 (76)	3.86	22	6.60 (82)	3.84	4	2.42 (60)	1.19	100	31
8	35	5.11 (60)	3.55	22	6.23 (85)	3.97	13	3.22 (39)	1.41	100	100
9	34	4.92 (61)	3.53	22	6.05 (81)	3.78	12	2.86 (49)	1.70	100	92
10	22	6.21 (83)	3.89	Reviewer			Reviewer			Reviewer	Reviewer
11	21	6.25 (45)	1.81	21	6.38 (71)	3.26	1	3.45	3.24	95	8
12	31	6.14 (67)	3.75	21	6.87 (84)	3.86	10	4.62 (99)	3.13	95	77
13	28	4.22 (47)	2.51	21	4.85 (56)	2.57	7	2.32 (31)	0.83	95	54
14	24	5.76 (70)	3.44	22	5.91 (74)	3.46	2	4.36 (274)	3.87	100	15
15	22	6.75 (73)	3.41	19	7.31 (76)	3.32	3	3.20 (59)	1.03	86	23
16*	22	N/A	N/A	22	N/A	N/A	0	N/A	N/A	100	0

Dispersion	10	0
χ^2	0.03	0.42

Table 3: Track density estimations. N= number analysed grains; ρ = track density. *: The analyst did not participate in the experiment but evaluated the grains as suitable and unsuitable. Numbers in parentheses denote standard errors. Dispersion and χ^2 are calculated using Radialplotter (Vermeesch 2009). Suitable and unsuitable grain selection percentages are calculated based on the number of grains selected of each type as listed in Table 1.

- Deleted: Initial
- Deleted: estimations
- Deleted: estimations
- Deleted: estimations
- Formatted Table

- Formatted: Font: Symbol
- Formatted: Font: 9 pt
- Formatted: Font: Symbol, 9 pt
- Formatted: Font: 9 pt
- Formatted: Font: 9 pt, Bold
- Deleted: ¶

500

505

510

515

Analyst	All reported length measurements			Valid length measurements			Invalid length measurements			Confined track length measurement validity percentage (%)
	N	l_m (μm)	σ (μm)	N	l_m (μm)	σ (μm)	N	l_m (μm)	σ (μm)	
1	16	13.91 (35)	1.38	12	14.33 (29)	1.00	4	12.66 (88)	1.76	75
2	14	13.71 (41)	1.54	Reviewer			Reviewer			Reviewer
3	31	11.96 (39)	2.18	13	13.05 (47)	1.70	18	11.17 (51)	2.18	42
4	8	13.79 (51)	1.45	7	13.82 (59)	1.56	1	13.58	N/A	88
5	19	13.11 (36)	1.59	13	13.58 (39)	1.40	6	12.07 (64)	1.58	68
6	5	13.08 (51)	1.14	4	12.80 (55)	1.10	1	14.22	N/A	80
7	10	12.43 (49)	1.54	6	12.85 (50)	1.23	4	11.80 (96)	1.91	60
8	16	12.69 (47)	1.90	9	12.67 (62)	1.86	7	12.72 (79)	2.09	56
9	33	13.26 (24)	1.40	18	12.96 (33)	1.40	15	13.63 (35)	1.36	55
10	18	14.39 (36)	1.54	17	14.42 (38)	1.58	1	13.89	N/A	94
11	16	13.16 (45)	1.81	13	13.51 (45)	1.61	3	11.66 (125)	2.17	81
12	4	12.32 (157)	3.15	1	12.88	N/A	3	12.13 (221)	3.83	25
13	49	12.05 (33)	2.32	20	13.16 (30)	1.33	29	11.29 (48)	2.57	41
14	18	13.19 (39)	1.66	14	13.36 (47)	1.77	4	12.60 (62)	1.24	78
15	22	12.88 (43)	2.01	13	12.98 (34)	1.22	3	12.73 (96)	2.89	59
Mean l_m (μm)	13.02 (04)			13.31 (04)						
σ (μm)	0.68			0.54						

Table 4: Confined track length measurements. N=number of lengths; l_m = mean track length; σ = standard deviation. Numbers in parentheses denote standard errors. The confined track length measurement validity percentage is calculated as the number of valid track length measurements divided by the total confined track length measurements for each analyst.

Formatted: Font: 9 pt

Deleted: Initial

Deleted: Min

Deleted: 11.96 (39)

Deleted: 12.67 (29)

Deleted: Max l_m

Formatted: Font: Symbol

Deleted: 14.39 (36)

Deleted: 14.42 (62)

Deleted: of the mean


Formatted: Font: 9 pt

Formatted: Font: 9 pt, Subscript

Formatted: Font: 9 pt

Formatted: Font: 9 pt, Bold

Formatted: Font: 9 pt

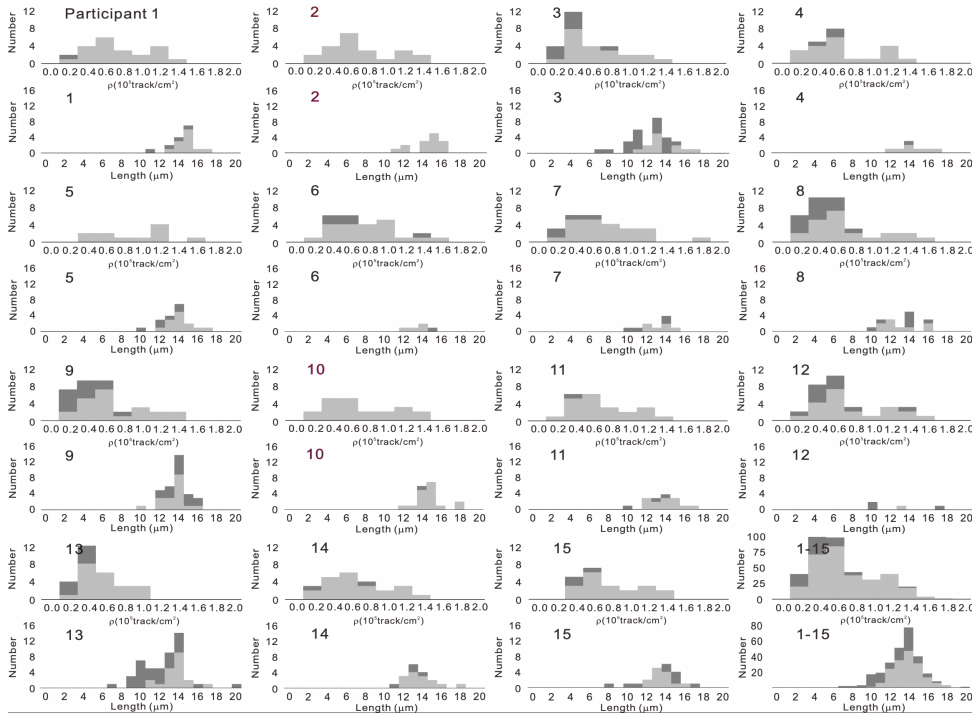

535

Figure 3: Track density (ρ) and confined track length distributions of each participant and the reviewers (2 and 10, in red). Participant numbers are indicated at the top left. The cumulative result for all participants is shown at the bottom right (1-15). Dark grey shows measurements of grains and confined tracks assessed to be unsuitable, and light grey displays the measurements of suitable selections.

Formatted: Font: Bold

Formatted: Normal

Deleted: Figure 3: Track density (ρ) and confined track length distributions of each participant and the reviewers (2 and 10, in red). Participant numbers are indicated at the top left. The cumulative result for all participants is shown at the bottom right (1-15). Dark grey shows measurements of grains and confined tracks assessed to be unsuitable, and light grey displays the measurements of suitable selections.

3.5 Impact of Experience

The acceptance percentage of suitable grains shows only a weak relationship with years of experience (Fig 4a). With increasing years of experience, the acceptance percentage of unsuitable grains decreases sharply, while the confined track validity percentage increases (Fig 4b). Accordingly, those who select higher percentages of unsuitable grains tend to have lower validity percentages of confined track length measurements as well (Fig 4c). These results highlight analyst experience as an important factor in data quality, although some less experienced analysts performed as well as much more experienced ones.

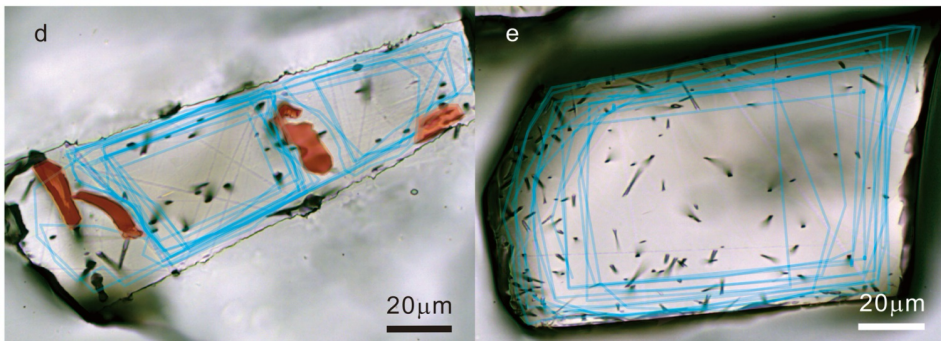
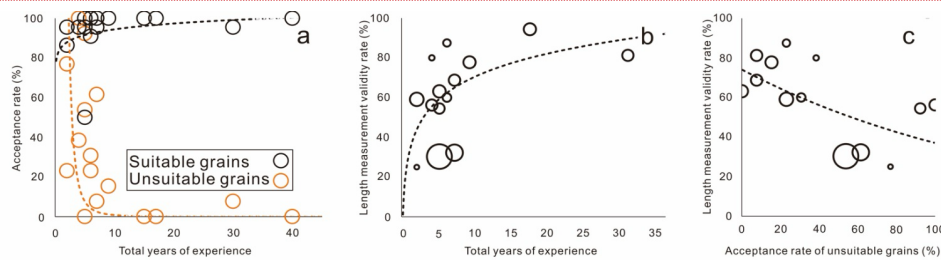


Figure 4: Correlation of years of fission-track experience against acceptance percentage of suitable and unsuitable grains for density measurement (a) and confined track length measurement validity percentage (b). The confined track length measurement validity percentage against the acceptance percentage of unsuitable grains is shown in c. The size of the circles in b and c reflect the number of confined track length measurements. Participant sections of the region of interest are juxtaposed in a defect/inclusion-rich grain (d) and a zoned grain (e).

Deleted: rate

Deleted: rate

Deleted: rate

Deleted: a dmit

Deleted: at higher rates percentages

Deleted: rate

Deleted: ¶

Participant 5 yielded the lowest acceptance percentages of 50% for the suitable grains and 0% for unsuitable grains. Participant 5 has been working exclusively on high-quality samples from one region for their entire fission-track experience (5 years), leading to selecting only the best-looking grains. This type of bias has been termed the 'mere-exposure effect' or 'familiarity principle', the tendency to develop preferences for things because they are familiar (Tversky and Kahneman, 1974). An analyst with narrower grain quality experience may miss available thermal history information by omitting objectively suitable, but less familiar, grains.¶

3.6 Region of Interest (ROI) Selection¶

Track density measurements on defect/inclusion-free grains with homogeneous track distributions may not be greatly affected by different region of interest (ROI) selections, but inclusion of largenumber and size of defects within a given in the ROI can cause an underestimation of density by obscuring tracks (Fig 4d). Similarly, the selection of high and low track density areas within a zoned grain can yield widely varying density determinations (Fig 4e). A single-spot or even dual-spot laser ablation approach on such grains may result in a significant dispersion of dates depending on the analyst's ROI selection. Several participants placed ROIs in too-close proximity to the mineral border (<-10 μm, Fig 4 d,e), where track registration is below the required 4π geometry (Fleischer et al., 1975; Donek et al., 2005).¶

Deleted: Figure 4: Correlation of years of fission-track experience against acceptance percentage of suitable and unsuitable grains for density measurement (a) and confined track length measurement validity percentage (b). The confined track length measurement validity percentage against the acceptance percentage of unsuitable grains is shown in c. The size of the circles in b and c reflect the number of confined track length measurements. Participant selections of the region of interest are juxtaposed in a defect/inclusion-rich grain (d) and a zoned grain (e).¶

Participant 5 yielded the lowest acceptance percentages of 50% for the suitable grains and 0% for unsuitable grains. Participant 5 has been working exclusively on high-quality samples from one region for their entire fission-track experience (5 years), leading to selecting only the best-looking grains. This type of bias has been termed the 'mere-exposure effect' or 'familiarity principle', the tendency to develop preferences for things because they are familiar (Tversky and Kahneman, 1974). An analyst with narrower grain quality experience may miss available thermal history information by omitting objectively suitable, but less familiar, grains.

Formatted: Normal

3.6 Region of Interest (ROI) Selection

Track density measurements on defect/inclusion-free grains with homogeneous track distributions may not be greatly affected by different region of interest (ROI) selections, but number and size of defects within a given ROI can cause an underestimation of density by obscuring tracks (Fig 4d). Similarly, the selection of high and low track density areas within a zoned grain can yield widely varying density determinations (Fig 4e). A single-spot or even dual-spot laser ablation approach on such grains may result in a significant dispersion of dates depending on the analyst's ROI selection. Several participants placed ROIs in too-close proximity to the mineral border (<~10 μm , Fig 4 d,e), where track registration is below the required 4π geometry (Fleischer et al., 1975).


Formatted: Normal

3.7 Light Source Utilization and a Case Correction on a Single Grain

To demonstrate some effects of the light source and ROI specification on density measurement, at the request of one participant, we reanalysed their track density for Grain 07, which was significantly lower than most of the group. Figure 5 shows the comparison on a track-by-track basis. Perhaps importantly, this analyst revealed a preference for counting tracks in transmitted light only. However, counting tracks solely in transmitted-light images can cause an underestimation of the track density (Aslanian et al., 2022; Tamer and Ketcham 2023). Figure 5 a and b show the transmitted and reflected light image for this particular grain, with the participant analysis in blue and re-analysis using images from both light sources in red with excluded counts in green. This reanalysis suggested that some genuine tracks had been overlooked, especially in the region on the right that is shaded in transmitted light. After adjustment of the ROI, the addition of the overlooked tracks in reflected light, and the exclusion of a track showing a defect-like pattern, the track density increases by ~35%.

Deleted: Preference

Deleted: reanalyzed

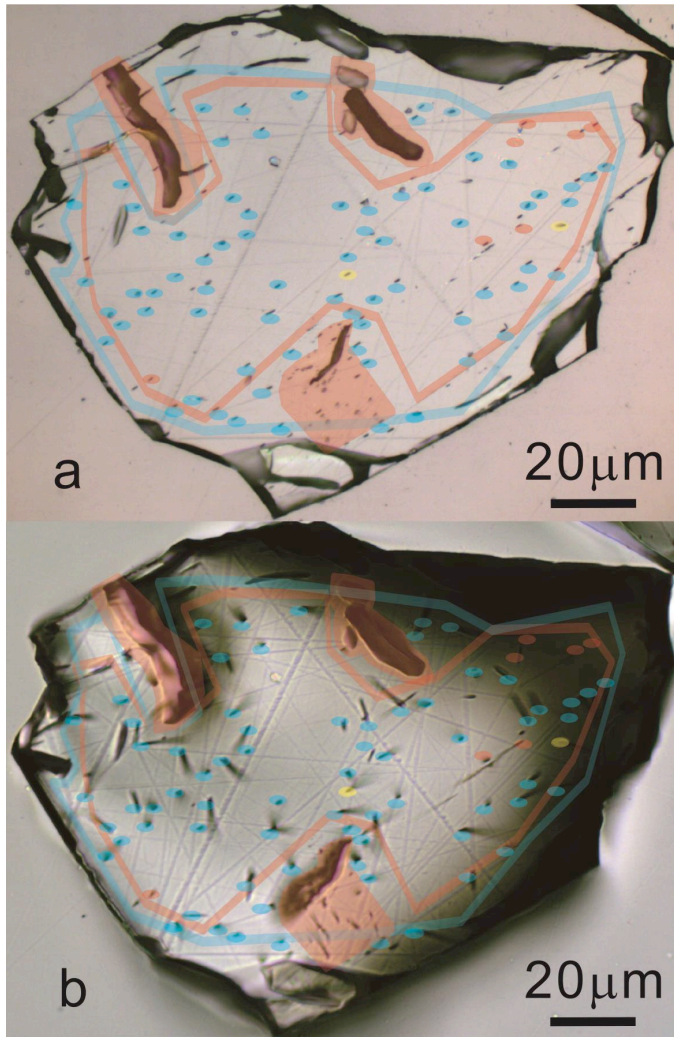

640 Figure 5: Transmitted and reflected light images of Grain 7 (a, b) with the analysis of one participant (blue) and a reviewer's proposed correction (red). Excluded defect areas and tracks.

Formatted: Font: 9 pt

3.8. Highlights of participant comments on the data set

Participants 1 and 5 found the images taken with no white balance to be not ideal for counting, and participants 5 and 7 mentioned that the grains etched with the 5.0 M HNO₃ 20s 20°C (Gleadow et al., 1986) protocol appear to be under-etched.

Formatted: Subscript

645 4 Implications, Suggestions and Conclusions

645 ~~Whether an analyst selects~~ unsuitable grains and/or conducts invalid confined track length measurements ~~will~~ depend ~~in part~~ on their years of experience, ~~and~~ training, ~~but may also be affected by~~ the difficulty in finding sufficient grains to meet analytical goals. ~~When the realities of a non-ideal sample conflict with an imposed requirement for how much data are required for study objectives, to the result can end up being~~ improper thermal history information. Comprehensive laboratory training
650 and calibrations are essential for fission-track analysts to avoid these problems. Results of graticule and confined track length calibrations and the identity of the analyst should be stated in publications.

Deleted: Analysts may consider

Deleted: ing

Deleted: and

Deleted: “

Deleted: Squeezing the rock”, or indeed “the grain”, to

Deleted: a standardized

Deleted: extract sufficient data in this way can lead to

ROI selection may cause varying track density determinations, especially in zoned and defect-rich grains. While a single-spot laser ablation analysis is a time-efficient approach, its application on such grains may result in varying U determinations unless
655 the laser spot covers a high proportion of the counted area (e.g., Cogné et al. 2020). Laser uranium mapping (Ansberque et al., 2021) or EDM (Gleadow and Lovering 1977) approaches require more work, but in ideal cases may better represent the selected region of interest. However, precise matching of spontaneous and induced track areas in the EDM can also be difficult in some cases. These approaches may also be more effective in identifying zoned grains when the spontaneous track density is low.

660

Zeta calibration (ζ) against a set of age standards is intended to normalize for uncertainties in some parameters in the age equation, such as thermal neutron fluence (ϕ) and the spontaneous fission decay constant (λ_f), and to account for varying counting efficiencies of different analysts (Hurford and Green 1983). This method assumes, however, that a calibration derived from measurements on near-ideal standard samples with minimal inclusions and defects (e.g., Durango, Fish Canyon Tuff
665 apatites) also reflects analyst judgements in unknown samples, which may yield any quality of grains. Zoning, high levels of inclusions and defects, and variable ROI selection may cause significant divergences unaccounted for by zeta calibration, particularly for a less-experienced analyst. These have been studied partially (Vermeesch 2017; Cogné and Gallagher 2021) but further work is needed on this matter.

670

Among the available confined tracks, analysts can select tracks with different effective etch times based on their individual perceptions and criteria. Some participants highlighted that the grains etched with 5.0 M HNO₃ at 20°C for 20s (e.g. Gleadow et al. 1986) appear under-etched, which agrees with a previous inter-analyst comparison experiment (Tamer et al., 2019). A

Formatted: Subscript

680 proposed two-step etching protocol (5.5 HNO₃ 21°C 20+10s) allows analysts to select any suitable track but ensures that the
final confined track length data set does not contain under-etched tracks (Tamer and Ketcham 2023).

Formatted: Subscript

The application of AI and machine learning methods have become popular topics in various research fields in earth sciences including fission-track counting and confined track length measurements. The quality of any automated analyses will be
685 defined by not only sophisticated algorithms but also the fission-track analysis experience of the initial “teacher” of the AI, including hardware preferences during image acquisition and the resulting image quality. Determining which grains and tracks are acceptable for measurement represents an additional challenge for AI method development; training cannot be based on good images alone but must also include features to avoid based on sometimes subtle indications.

690 The exposure of the “ingredients” of thermal history modeling is limited to data summary tables and sometimes raw data as supplementary files to research articles. Although fission-track data have generally fared well in inter-laboratory age comparisons in recent years, these have tended to utilize relatively straightforward samples. This study illustrates some of the potential hazards of fission-track analysis of more challenging materials, but also pathways toward improving data reliability. In particular, the opportunity is coming into view for the fission-track community to share data on a new level, allowing
695 analysts to see, learn from, and discuss each others’ image data.

Recent developments in data repositories and metadata reporting are healthy signs of an emerging open science culture and up-to-date reporting in low-T thermochronology. However, these are currently limited to collecting and presenting the data in their corresponding geo-locations (Boone et al., 2022; Boone et al., 2023a) and data reporting formats and table contents (Kohn et al., 2024). Given the continuing relevance of fission-track data, we recommend building toward a global infrastructure and culture enabling and
700 encouraging data transparency and sharing through the formation of online digital image repositories (such as geochron@home (Vermeesch et al., 2023)), which can accommodate fission-track image data. Furthermore, proper analyst training and reconsideration of laboratory routines for image acquisition are needed. It has been over 60 years since the beginning of the fission-track dating method (Price and Walker, 1962), and no clear guidelines have been formulated on
705 “musts” and “cans” in fission-track practice. While existing fission-track laboratories develop their own preferences and routines, new laboratories often represent branching points, which can be a source of necessary and beneficial innovation but also undocumented and undesirable divergence. A global community repository housing guidelines for best-practice fission track analyses and fission track training modules are needed, as well as reference libraries of interpreted image sets. Adoption of an open science culture will ultimately benefit every fission-track laboratory and increase data quality.

Deleted: encouraging data transparency

Deleted: undesirable

710 *Code and data availability.* The image data used for this study, and the analysis results, have been uploaded to geochron@home (Vermeesch 2024). The analyst numbers in Table S1 are replaced with random letters in geochron@home to preserve anonymity.

Deleted: S2

Author contributions. Conceptualisation: MTT, LC, RAK, AJWG. Data curation: MTT, LC. Formal analysis: MTT, LC. Software: LC, AJWG. Investigation: MTT, LC. Methodology: MTT, LC, RAK, AJWG. Resources - MTT, LC, RAK, AJWG. Writing – original draft preparation: MTT, LC, RAK, AJWG. Writing – review & editing: MTT, LC, RAK, AJWG.

Deleted: ¶

Competing interests. The authors have no competing interests to declare.

Acknowledgements. We appreciate all the participants in this study for their participation and critical discussions. This research was supported by the Geology Foundation of the Jackson School of Geosciences and Fundamental Research Funds in the Institute of Geology, China Earthquake Administration (IGCEA2229), National Science Foundation of China (4231101318) and Project 3.51 of the AuScope Program within the Australian National Collaborative Research Infrastructure Strategy. We thank Raymond Donelick and Edward Sobel for the reviews and Shigeru Sueoka for editorial handling.

Deleted: all of

References

Ansberque, C., Chew, D. M., & Drost, K.: Apatite fission-track dating by LA-Q-ICP-MS imaging. *Chemical Geology*, 560, 119977, <https://doi.org/10.1016/j.chemgeo.2020.119977>, 2021.

Aslanian, C., Jonckheere, R., Wauschkuhn, B., & Ratschbacher, L.; Short communication: Experimental factors affecting fission-track counts in apatite. *Geochronology*, 4(1), 109-119, <https://doi.org/10.5194/gchron-4-109-2022>, 2022.

Barbarand, J., Hurford, T., & Carter, A. : Compositional and structural control of fission-track annealing in apatite. *Chemical Geology*, 198(1-2), 107-137, [https://doi.org/10.1016/S0009-2541\(02\)00424-2](https://doi.org/10.1016/S0009-2541(02)00424-2), 2003.

Barnes, J.B., Ehlers, T.A., Insel, N., McQuarrie, N. & Poulsen, C.J. : Linking orography, climate, and exhumation across the central Andes. *Geology*, 40(12), pp.1135-1138. <https://doi.org/10.1130/G33229.1>, 2012.

Balestrieri, M.L., Bigazzi, G. & Ghezzi, C. : The transantarctic mountains: a natural laboratory for apatite fission-track analysis. Results from Italian Antarctic expeditions. *Radiation measurements*, 31(1-6), pp.621-626. [https://doi.org/10.1016/S1350-4487\(99\)00154-7](https://doi.org/10.1016/S1350-4487(99)00154-7), 1991.

Deleted: 9

Bernet, M., Wootton, L., Valla, P., Laverigne, S., Boucher, F., Barun, J., Husson, L., Robert, X., & Balvay, M.: Tracing Western Alps mountain building and high mountain biodiversity since the the early-mid Miocene. 18th International Conference of Thermochronology, Riva del Garda, Italy, 2023.

755 [Boone, S. C., Dalton, H., Prent, A., Kohlmann, F., Theile, M., Gréau, Y., Florin, G., Noble, W., Hodgekiss, S. A., & Ware, B. : AusGeochem: An Open Platform for Geochemical Data Preservation, Dissemination and Synthesis. *Geostandards and Geoanalytical Research* 46 \(2\), <https://doi.org/10.1111/ggr.12419>, 2022.](#)

Moved (insertion) [3]

Field Code Changed

760 [Boone, S.C., Kohlmann, F., Noble, W., Theile, M., Beucher, R., Kohn, B., Glorie, S., Danišik, M., Zhou, R., McMillan, M. & Nixon, A. : A geospatial platform for the tectonic interpretation of low-temperature thermochronology Big Data. *Scientific Reports*, 13\(1\), p.8581, <https://doi.org/10.1111/ggr.12419>, 2023a.](#)

Moved (insertion) [2]

Field Code Changed

Boone, S.C., Faux N., Nattala, U., Jiang, C., Church, T., Chung, L., Mcmillan, M., Jones, S., Jiang, H., Liu, D., Ehinger, K., Drummond, T., Kohn, B., & Gleadow, A.J.W. : Towards Fully Automated Digital Fission-Track Analysis Through Artificial Intelligence. 18th International Conference of Thermochronology, Riva del Garda, Italy, 2023b.

Deleted: ¶

765 [Burtner, R.L., Nigrini, A., and Donelick, R.A., 1994. Thermochronology of Lower Cretaceous source rocks in the Idaho-Wyoming thrust belt. *American Association of Petroleum Geologists Bulletin*, vol. 78, no. 10, pp. 1613-1636.](#)

Moved up [2]: Boone, S.C., Kohlmann, F., Noble, W., Theile, M., Beucher, R., Kohn, B., Glorie, S., Danišik, M., Zhou, R., McMillan, M. & Nixon, A. : A geospatial platform for the tectonic interpretation of low-temperature thermochronology Big Data. *Scientific Reports*, 13(1), p.8581, <https://doi.org/10.1111/ggr.12419>, 2023.

Moved up [3]: Boone, S. C., Dalton, H., Prent, A., Kohlmann, F., Theile, M., Gréau, Y., Florin, G., Noble, W., Hodgekiss, S. A., & Ware, B. : AusGeochem: An Open Platform for Geochemical Data Preservation, Dissemination and Synthesis. *Geostandards and Geoanalytical Research* 46 (2), <https://doi.org/10.1111/ggr.12419>, 2022.¶

770 [Carlson, W.D., Donelick, R.A. & Ketcham, R.A.: Variability of apatite fission-track annealing kinetics: I. Experimental results. *American Mineralogist*, 84\(9\), pp.1213-1223. <https://doi.org/10.2138/am-1999-0901>, 1999.](#)

Deleted: ¶

[Cogné, N., Chew, D. M., Donelick, R. A., & Ansberque, C. : LA-ICP-MS apatite fission track dating: A practical zeta-based approach. *Chemical Geology*, 531, 119302. <https://doi.org/10.1016/j.chemgeo.2019.119302>, 2020.](#)

Deleted: ¶

775 [Cogné, N. & Gallagher, K.: Some comments on the effect of uranium zonation on fission track dating by LA-ICP-MS. *Chemical Geology*, 573, p.120226. <https://doi.org/10.1016/j.chemgeo.2021.120226>, 2021.](#)

780 [Deng, J., Wang, C., Bagas, L., Carranza, E. J. M., & Lu, Y. : Cretaceous–Cenozoic tectonic history of the Jiaojia Fault and gold mineralization in the Jiaodong Peninsula, China: constraints from zircon U–Pb, illite K–Ar, and apatite fission track thermochronometry. *Mineralium Deposita*, 50, 987-1006, <https://doi.org/10.1007/s00126-015-0584-1>, 2015.](#)

[Donelick, R.A.: A method of fission track analysis utilizing bulk chemical etching of apatite. U.S. Patent Number 5,267,274, 1993.](#)

785 [Donelick, R.A., Ketcham, R.A., and Carlson, W.D.: Variability of apatite fission track annealing kinetics II: Crystallographic orientation effects. *American Mineralogist*, v. 84, pp. 1224-1234, 1999.](#)

- 805 Donelick, R. A., O'Sullivan, P. B., & Ketcham, R. A. : Apatite fission-track analysis. *Reviews in Mineralogy and Geochemistry*, 58(1), 49-94. <https://doi.org/10.2138/rmg.2005.58.3>, 2005.
- Dumitru, T.A., Hill, K.C., Coyle, D.A., Duddy, I.R., Foster, D.A., Gleadow, A.J.W., Green, P.F., Kohn, B.P., Laslett, G.M. & O'Sullivan, A.J. : Fission track thermochronology: application to continental rifting of south-eastern Australia. *The APPEA Journal*, 31(1), pp.131-142. <https://doi.org/10.1071/AJ90011>, 1991.
- 810 [Fleischer, R.L., Price, P.B., Walker, R.M.: Nuclear Tracks in Solids: Principles and Techniques. University of California Press, Berkeley, 605 p, 1975.](#)
- Fitzgerald, P.G. & Goode, J.W. : Exhumation and tectonic history of inaccessible subglacial interior East Antarctica from thermochronology on glacial erratics. *Nat Commun* 13, 6217. <https://doi.org/10.1038/s41467-022-33791-y>, 2022.
- 815 Gallen, S.F., Seymour, N.M., Glotzbach, C. Stockli, D.F., & O'Sullivan, P. : Calabrian forearc uplift paced by slab–mantle interactions during subduction retreat. *Nat. Geosci.* <https://doi.org/10.1038/s41561-023-01185-4>, 2023.
- 820 Gleadow, A. J. W., & Lovering, J. F. : Geometry factor for external detectors in fission track dating. *Nuclear Track Detection*, 1(2), 99-106. [https://doi.org/10.1016/0145-224X\(77\)90003-5](https://doi.org/10.1016/0145-224X(77)90003-5), 1977.
- Gleadow, A.J.W., Duddy, I.R., Green, P.F., & Lovering, J.F. : Confined fission track lengths in apatite: a diagnostic tool for thermal history analysis. *Contributions to Mineralogy and Petrology*, 94, 405-415. <https://doi.org/10.1007/BF00376334>, 1986.
- 825 Gleadow, A.J.W., Gleadow, S.J., Belton D.X., Kohn, B.P., Krochmal M.S. & Brown, R.W. : Coincidence mapping - a key strategy for the automatic counting of fission tracks in natural minerals . *Geological Society of London Special Publication* 324, 25-36. <https://doi.org/10.1144/SP324.2>, 2009.
- 830 Gleadow, A.J.W., Kohn, B., & Seiler, C. : The Future of Fission-Track Thermochronology. In: Malusà, M., Fitzgerald, P. (eds) *Fission-Track Thermochronology and its Application to Geology*. Springer Textbooks in Earth Sciences, Geography and Environment. Springer, Cham. https://doi.org/10.1007/978-3-319-89421-8_4, 2019.
- 835 [Green, P. F., Duddy, I. R., Gleadow, A. J. W., Tingate, P. R., & Laslett, G. M. : Thermal annealing of fission tracks in apatite 1. A qualitative description. *Chemical Geology \(Isotope Geoscience Section\)*, 59, 237-253. \[https://doi.org/10.1016/0168-9622\\(86\\)90074-6\]\(https://doi.org/10.1016/0168-9622\(86\)90074-6\), 1986.](#)

- 840 Gülyüz, N., Gülyüz, E., Karaoglan, F., & Kuseu, I. : Low temperature thermochronology reveals tilting of crystalline bodies, Halilaga porphyry Cu-Au deposit, NW Anatolia: Implications for exploration of porphyry copper deposits and interpretation of low-temperature thermochronology data for regional tectonics. *Ore Geology Reviews*, 166, 105958. <https://doi.org/10.1016/j.oregeorev.2024.105958>, 2024.
- Hasebe, N., Barbarand, J., Jarvis, K., Carter, A. & Hurford, A.J. : Apatite fission-track chronometry using laser ablation ICP-MS: *Chemical Geology*, 207(3-4), pp.135-145. <https://doi.org/10.1016/j.chemgeo.2004.01.007>, 2004.
- Hurford, A.J. & Green, P.F., : The zeta age calibration of fission-track dating, *Chemical Geology*, 41, pp.285-317. [https://doi.org/10.1016/S0009-2541\(83\)80026-6](https://doi.org/10.1016/S0009-2541(83)80026-6), 1983.
- 850 Karaoglan F., Karatas, B., Ozdemir, Y., Gulyuz, E., Vassiliev, O., Selbesoglu, M. O. & Gildir, S. : The geo/thermochronology of Dismal Island (Marguerite Bay, Antarctic Peninsula), *Turkish Journal of Earth Sciences*, 32, 8, 4. <https://doi.org/10.55730/1300-0985.1887>, 2023.
- Ketcham, R. A., Donelick, R. A., Balestrieri, M. L., & Zattin, M. : Reproducibility of apatite fission-track length data and thermal history reconstruction: *Earth and Planetary Science Letters*, 284(3), 504-515. <https://doi.org/https://doi.org/10.1016/j.epsl.2009.05.015>, 2009.
- Ketcham, R. A., Carter, A., & Hurford, A. J., : Inter-laboratory comparison of fission track confined length and etch figure measurements in apatite, *American Mineralogist*, 100(7), 1452-1468. <http://dx.doi.org/10.2138/am-2015-5167>, 2015.
- 860 Ketcham, R. A., van der Beek, P., Barbarand, J., Bernet, M., & Gautheron, C., : Reproducibility of thermal history reconstruction from apatite fission-track and (U- Th)/He data: *Geochemistry, Geophysics, Geosystems*, 19(8), 2411-2436. <https://doi.org/10.1029/2018GC007555>, 2018.
- 865 Kohn, B.P., Pillans, B. & McGlone, M.S., : Zircon fission track age for middle Pleistocene Rangitawa Tephra, New Zealand: stratigraphic and paleoclimatic significance. *Palaeogeography, palaeoclimatology, palaeoecology*, 95 (1-2), pp.73-94. [https://doi.org/10.1016/0031-0182\(92\)90166-3](https://doi.org/10.1016/0031-0182(92)90166-3), 1992.
- Kohn, B. P., Ketcham, R. A., Vermeesch, P., Boone, S. C., Hasebe, N., Chew, D., Bernet, M., Chung, L., Danisik, M., Gleadow, A.J.W., & Sobel, E. R. : Interpreting and reporting fission-track chronological data, *Geological Society of America Bulletin*, pp. 30-. <https://doi.org/10.1130/B37245.1>, 2024.

Deleted:

Green, P. F. (1981), A new look at statistics in fission-track dating: *Nuclear tracks*, 5(1-2), 77-86. [https://doi.org/10.1016/0191-278X\(81\)90029-9](https://doi.org/10.1016/0191-278X(81)90029-9), 1981.

- Li, R., Xu, Z., Su, C., & Yang, R. : Automatic identification of semi-tracks on apatite and mica using a deep learning method, *Computers & Geosciences*, 162, 105081. <https://doi.org/10.1016/j.cageo.2022.105081>, 2022.
- 880 Lemot, F., Valla, P.G., van der Beek, P., Jagercikova, M., Niedermann, S., Carcaillet, J., Sobel, E.R., Andò, S., Garzanti, E., Robert, X. & Balvay, M. : Miocene cave sediments record topographic, erosional and drainage development in the Western European Alps. *Earth and Planetary Science Letters*, 621, p.118344. <https://doi.org/10.1016/j.epsl.2023.118344>, 2023.
- Miller, D. S., Duddy, I. R., Green, P. F., Hurford, A. J., & Naeser, C. W. : Results of interlaboratory comparison of fission-track age standards: Fission-track workshop—1984, *Nuclear Tracks and Radiation Measurements*, 10(3), 383–391. [https://doi.org/10.1016/0735-245X\(85\)90127-9](https://doi.org/10.1016/0735-245X(85)90127-9), 1985.
- 885 Miller, D.S., Eby, N., McCorkell, R., Rosenberg, P.E. & Suzuki, M. : Results of interlaboratory comparison of fission track ages for the 1988 fission track workshop. *International Journal of Radiation Applications and Instrumentation. Part D. Nuclear Tracks and Radiation Measurements*, 17(3), pp.237-245. [https://doi.org/10.1016/1359-0189\(90\)90041-U](https://doi.org/10.1016/1359-0189(90)90041-U), 1990.
- 890 Miller, D.S., Crowley, K.D., Dokka, R.K., Galbraith, R.F., Kowallis, B.J., & Naeser, C.W. : Results of interlaboratory comparison of fission track ages for 1992 Fission Track Workshop, *Nuclear Tracks*, 21(4), 565-57. [https://doi.org/10.1016/1359-0189\(93\)90179-H](https://doi.org/10.1016/1359-0189(93)90179-H), 1993.
- 895 Nachtergaele, S., and De Grave, J. : AI-Track-tive: open-source software for automated recognition and counting of surface semi-tracks using computer vision (artificial intelligence), *Geochronology*, 3(1), 383-394. <https://doi.org/10.5194/gchron-3-383-2021>, 2021.
- 900 Naeser, C.W., Zimmermann, R.A. & Cebula, G.T. : Fission-track dating of apatite and zircon: an interlaboratory comparison, *Nuclear Tracks*, 5(1-2), pp.65-72. [https://doi.org/10.1016/0191-278X\(81\)90027-5](https://doi.org/10.1016/0191-278X(81)90027-5), 1981.
- Price, P.B., & Walker, R.M. : Chemical etching of charged particle tracks in solids, *Journal of Applied Physics*, 33, 3407-3412. <https://doi.org/10.1063/1.1702421>, 1962.
- 905 Reiners, P.W., & Shuster, D.L. : Thermochronology and landscape evolution, *Physics Today*; 62 (9): 31–36. <https://doi.org/10.1063/1.3226750>, 2009.

- 910 Qiu, K.F., Deng, J., Sai, S.X., Yu, H.C., Tamer, M. T., Ding, Z.J., Yu, X.F., & Goldfarb, R.J. : Low-temperature
thermochronology for defining the tectonic controls on heterogeneous gold endowment across the Jiaodong Peninsula, eastern
China, *Tectonics*, 42(1), e2022TC007669. <https://doi.org/10.1029/2022TC007669>, 2023.
- Qiu, N. & Liu, S. : Uplift and denudation in the continental area of China linked to climatic effects: Evidence from apatite and
zircon fission track data, *Scientific Reports*, 8(1), p.9546. <https://doi.org/10.1038/s41598-018-27801-7>, 2018.
- 915 Ren, Z., Li, S., Xiao, P., Yang, X. & Wang, H. : Artificial intelligent identification of apatite fission tracks based on machine
learning. *Machine Learning: Science and Technology*, 4(4), p.045039. <https://doi.org/10.1088/2632-2153/ad0e17>, 2023.
- Sobel, E.R., & Seward, D. : Influence of etching conditions on apatite fission-track etch pit diameter: *Chemical Geology* 271(1-
920 2), 59-69. <https://doi.org/10.1016/j.chemgeo.2009.12.012>, 2010.
- Tagami, T. & O'Sullivan, P.B. : Fundamentals of fission-track thermochronology: Reviews in mineralogy and geochemistry,
58(1), pp.19-47. <https://doi.org/10.2138/rmg.2005.58.2>, 2005.
- 925 Tamer, M. T., Chung, L., Ketcham, R. A., & Gleadow, A. J., : Analyst and etching protocol effects on the reproducibility of
apatite confined fission-track length measurement, and ambient-temperature annealing at decadal timescales: *American
Mineralogist: Journal of Earth and Planetary Materials*, 104(10), 1421-1435. <https://doi.org/10.2138/am-2019-7046>, 2019.
- Tamer, M. T., Chung, L., Ketcham, R. A., & Gleadow, A.J.W. : Inter-analyst comparison and reproducibility of apatite fission
930 track analysis. 17th International Conference of Thermochronology, Santa Fe, USA, 2021. DOI:
<https://doi.org/10.1002/essoar.10507907.2>, 2021.
- Tamer, M. T., & Ketcham, R. A. : How many vs which: On track selection criteria for apatite fission track analysis: *Chemical
Geology*, 634, 121584. <https://doi.org/10.1016/j.chemgeo.2023.121584>, 2023.
- 935 Torres, V., Hooghiemstra, H., Lourens, L. & Tzedakis, P.C. : Astronomical tuning of long pollen records reveals the dynamic
history of montane biomes and lake levels in the tropical high Andes during the Quaternary. *Quaternary Science Reviews*, 63,
pp.59-72. <https://doi.org/10.1016/j.quascirev.2012.11.004>, 2013.
- 940 Tversky, A., & Kahneman, D. : Judgment under Uncertainty: Heuristics and Biases: Biases in judgments reveal some heuristics
of thinking under uncertainty. *Science*, 185(4157), 1124-1131. <https://doi.org/10.1126/science.185.4157.1124>, 1974.

Vermeesch, P. ; RadialPlotter: a Java application for fission track, luminescence and other radial plots, *Radiation Measurements*, 44, 409–410, 2009.

945

Vermeesch, P. : pvermeesch/GaHa: v.1 (v.1). Zenodo. <https://doi.org/10.5281/zenodo.13777917>, 2024.

Vermeesch, P. :How many grains are needed for a provenance study? *Earth and Planetary Science Letters*, 224(3-4), pp.441-451. <https://doi.org/10.1016/j.epsl.2004.05.037>, 2004.

950

Vermeesch, P. : Statistics for LA-ICP-MS based fission track dating. *Chemical Geology*, 456, pp.19-27. <https://doi.org/10.1016/j.chemgeo.2017.03.002>, 2017.

955

Vermeesch, P., Band, T., Duong, E., & Carter, A. : Crowd sourced fission track dating with geochron@home. 18th International Conference on Thermochronology, Riva del Garda, Italy. Abstract Volume, 190, 2023.

[Wagner, G. A., Van den Haute, P., Wagner, G. A., & Van den Haute, P. \(1992\). Fission-Track Dating Method \(pp. 59-94\). Springer Netherlands.](#)

960

Yu, J., Zheng, D., Pang, J., Li, C., Wang, Y., Wang, Y., Hao, Y. & Zhang, P. ; Cenozoic mountain building in eastern China and its correlation with reorganization of the Asian climate regime: *Geology*, 50(7), pp.859-863. <https://doi.org/10.1130/G49917.1>, 2022.

Formatted: English (US)